

ADAPTACLAD® RS

DESIGN & INSTALLATION FRONT-END INFORMATION

SYSTEM OVERVIEW

Laminators Inc. AdaptaClad RS is a weather-resistant, exterior wall cladding panel system that combines a modern reveal-joint aesthetic with drained and back ventilated rainscreen performance. The panel system includes fabricated Omega-Lite® FR aluminum composite material (ACM) panels with aluminum perimeter extrusions, stiffeners, and panel clips. Omega-Lite® FR ACM insert strips are installed at panel joints. The panel system can be installed over a variety of substrates including Laminators Inc. Omega CI® rigid insulation panels or other third-party continuous insulation (CI) solutions.

DESIGN & INSTALLATION

This Laminators Inc. Design & Installation detail set consists of front-end information and details and is complete with respect to architectural design development and field installation. The front-end information outlines all applicable information for the panel system and its intended use. The details represent the panel system in relationship to a typical exterior wall assembly and provide required information for installation. Laminators Inc. makes no claim as to the application of the details to project-specific conditions. Additional information required to fabricate the panel system is available in Laminators Inc. Shop Fabrication detail set.

CODES, STANDARDS, & TESTING

Laminators Inc. retains Professional Engineers (PE) licensed in the state of primary research & development, design, and manufacturing (i.e., Commonwealth of Pennsylvania) to provide structural design, detailing, and testing support for the panel system. Accordingly, the panel system has been designed and detailed to the International Building Code, including applicable Referenced Standards.

The panel system has been tested to the following Standards:

1. AAMA 509 Voluntary Test and Classification Method for Drained and Back Ventilated Rainscreen Wall Cladding Systems
2. ASTM E283 Standard Test Method for Determining Rate of Air Leakage Through Exterior Windows, Curtain Walls, and Doors Under Specified Pressure Differences Across the Specimen
3. ASTM E330 Standard Test Method for Structural Performance of Exterior Windows, Doors, Skylights and Curtain Walls by Uniform Static Air Pressure Difference
4. ASTM E331 Standard Test Method for Water Penetration of Exterior Windows, Skylights, Doors, and Curtain Walls by Uniform Static Air Pressure Difference

Go beyond the panel... and go to the next level!

5. NFPA 285 Standard Fire Test Method for Evaluation of Fire Propagation Characteristics of Exterior Wall Assemblies Containing Combustible Components

STRUCTURAL CAPACITY

The project-specific Components and Cladding (C&C) wind load requirements (*Required Strength*) established by the Design Professional of Record (DPR) shall not exceed the structural capacity of the panel system (*Available Strength*) as established by Laminators Inc.

Multiple structural capacities are provided within this detail set indicating required panel clip placement and installation screw requirements for various substrates. The end user is responsible for appropriate use of the information contained in this detail set based on project-specific wind load requirements. Laminators Inc. assumes no responsibility for failure of the panel system resulting from incorrect use of the presented information.

DELEGATED DESIGN

For project-specific specifications that require Delegated Design, Laminators Inc. PE may serve as a Specialty Structural Engineer (SSE) and prepare a calculation submittal for the Installer and General Contractor. The calculation submittal is system-specific and supports the documented structural capacity of the panel system. It is the responsibility of the DPR and Structural Engineer of Record (SER) for the project to review the calculation submittal for conformance with the project-specific design criteria.

Note that the Installer may need to acquire the service of a third-party PE licensed in the state of the project to evaluate the submittal prior to being provided to the DPR and SER.

NFPA 285 COMPLIANCE

The panel system has been tested in specific wall assemblies in accordance with, and meets the Conditions of Acceptance of, NFPA 285. Test reports are available upon request.

An Engineering Evaluation (EEV) is available from Laminators Inc. that presents specific engineering extensions and permits substitutions with respect to base wall components, cavity insulation, exterior sheathing, water-resistive barriers, and exterior insulation, while maintaining NFPA 285 compliance. The EEV may be required for project-specific submissions to an Authority Having Jurisdiction (AHJ).

Laminators Inc. takes no responsibility for NFPA 285 compliance related to wall assemblies incorporating Laminators products that are not documented under one of the following:

- 1) Specific wall assemblies tested by Laminators Inc., or
- 2) An EEV supplied by Laminators Inc. from a third-party fire consultant

If documented compliance is not available from Laminators Inc. for the proposed wall assembly, the DPR is responsible for contacting a third-party fire consultant to establish compliance via a separate EEV or modifying the proposed wall assembly to a compliant condition.

RECEIVING

Upon receipt of fabricated panels and accessories, perform a visual inspection and inventory to identify any damages that may have occurred during shipping and/or missing components. Any such conditions must be noted on the bill of lading at the time of receipt and must be immediately reported by the Installer to Laminators Inc. or the Fabricator from which the materials were purchased.

STORAGE & HANDLING

1. Store fabricated panels horizontally on pallets in a dry, well-ventilated environment protected from construction activities and associated debris.
2. Store all fabricated panels and accessories a minimum of 4" above grade level to avoid contact with direct moisture (e.g. water, snow, etc.).
3. Storage temperatures shall not exceed 120°F.
4. Other materials shall not be stacked on, or placed in contact with, panels to prevent damage.
5. Protective masking should be left on all fabricated panels and insert strips to prevent damage. Masking should be removed from each insert strip prior to installation but should not be removed from each panel until after installation. All masking shall be removed within two weeks of installation.
6. Handle all fabricated panels with clean work gloves to avoid hand injury from any sharp edges and to prevent staining.

PREPARATION & TOLERANCES

Field-verify all project-specific substrate conditions meet substrate criteria minimums as established by this detail set. The General Contractor (GC) is responsible for providing an acceptable substrate with the following tolerances:

1. Adjacent substrate surface out-of-plane offset: +/- 1/8"
2. Level, plumb, and location control line deviation: 1/4" in any 20 feet
3. Building elevation direction deviation: +/- 1/2"

Documentation shall be provided to the GC indicating any conditions detrimental to the installation of the panel system.

METALLIC & ANODIZED FINISHES

Variation and directionality are common characteristics across a range of colors, finishes, patterns, and textures of panel finishes. Therefore, project-specific coordination of panel orientation is particularly

important for metallic paint and anodized aluminum finishes. Directional arrows are printed on the masking to assist with same-direction panel orientation during installation.

WARRANTY

To satisfy the ACM Manufacturer's Material Warranty requirement of project-specific specifications, a Limited Warranty document is available from Laminators Inc. that is project-specific and consists of two parts: a *Panel Material and Product Warranty* and a *Panel and Extrusion Finish Warranty*.

The Limited Warranty is subject to stated terms, conditions, limitations, remedies, legal rights, and a disclaimer. Failure of the project-specific exterior wall assembly drawings, specifications, shop drawings, and/or installation to be in general conformance with the Laminators Inc. Design & Installation detail set may void one or both parts of the Limited Warranty. Laminators Inc. does not provide any installation warranty.

ADAPTA CLAD® RS


DESIGN & INSTALLATION DETAILS

DRAWING INDEX

REV 00, 9/1/2026

DWG NO.	TITLE	REV DATE	REV	CHANGE FROM PREVIOUS REV
A-101	FABRICATED PANEL OVERVIEW	9/1/2026	00	
A-102	JOINT CLIP OVERVIEW	9/1/2026	00	
A-103	STARTER & END CLIP OVERVIEW	9/1/2026	00	
A-104	SUBSTRATE COMPATIBILITY	9/1/2026	00	
A-105	FRAMING ALIGNMENT OPTIONS	9/1/2026	00	
A-106	PANEL STIFFENER ROTATION	9/1/2026	00	
A-107	NFPA 285 COMPLIANCE OPTIONS	9/1/2026	00	
A-108	JOINT ALIGNMENT & AIR GAP	9/1/2026	00	
A-201	TYPICAL ELEVATION – JOINTS, EDGES, & OPENINGS	9/1/2026	00	
A-202	TYPICAL ELEVATION – TRANSITIONS & PENETRATIONS	9/1/2026	00	
A-203	TRANSITION PANEL SIZE REQUIREMENTS	9/1/2026	00	
A-301	HORIZONTAL JOINT DETAIL	9/1/2026	00	
A-302	VERTICAL JOINT DETAIL	9/1/2026	00	
A-303	BOTTOM HORIZONTAL EDGE DETAIL	9/1/2026	00	
A-304	TOP HORIZONTAL EDGE DETAIL	9/1/2026	00	
A-305	LEFT VERTICAL EDGE DETAIL	9/1/2026	00	
A-306	RIGHT VERTICAL EDGE DETAIL	9/1/2026	00	
A-307	HEAD DETAIL AT OPENING	9/1/2026	00	
A-307.A	HEAD DETAIL AT OPENING (OMEGA CI)	9/1/2026	00	
A-307.B	HEAD DETAIL AT OPENING (RIGID INSULATION WITH Z-GIRTS)	9/1/2026	00	
A-308	SILL DETAIL AT OPENING	9/1/2026	00	
A-309	LEFT JAMB DETAIL AT OPENING	9/1/2026	00	
A-309.A	LEFT JAMB DETAIL AT OPENING (OMEGA CI)	9/1/2026	00	
A-309.B	LEFT JAMB DETAIL AT OPENING (RIGID INSULATION WITH Z-GIRTS)	9/1/2026	00	
A-310	RIGHT JAMB DETAIL AT OPENING	9/1/2026	00	
A-311	INSIDE CORNER DETAIL	9/1/2026	00	
A-312	OUTSIDE CORNER DETAIL	9/1/2026	00	
A-313	SOFFIT-TO-WALL TRANSITION DETAIL	9/1/2026	00	
A-314	FASCIA-TO-SOFFIT TRANSITION DETAIL	9/1/2026	00	
A-315	PANEL PENETRATION DETAIL	9/1/2026	00	

DWG NO.	TITLE	REV DATE	REV	CHANGE FROM PREVIOUS REV
A-401	PANEL CLIP REQUIREMENTS – PERPENDICULAR FRAMING	9/1/2026	00	
A-402	PANEL CLIP REQUIREMENTS – ALIGNED / PARALLEL FRAMING	9/1/2026	00	
A-403	PANEL CLIP REQUIREMENTS – CONTINUOUS SUBSTRATES	9/1/2026	00	
A-404	SPECIAL CLIP REQUIREMENTS – PORTRAIT PANEL AT OUTSIDE CORNER	9/1/2026	00	
A-405	SPECIAL CLIP REQUIREMENTS – LANDSCAPE PANEL SOFFIT TRANSITION	9/1/2026	00	
A-406	SET SCREW REQUIREMENTS	9/1/2026	00	
A-501	PANEL CLIP SCREW SCHEDULE – 18 GA. CFSF (PERPENDICULAR)	9/1/2026	00	
A-502	PANEL CLIP SCREW SCHEDULE – 18 GA. CFSF (ALIGNED / PARALLEL)	9/1/2026	00	
A-503	PANEL CLIP SCREW SCHEDULE – 15/32" (1/2" NOM) PLYWOOD	9/1/2026	00	
A-504	PANEL CLIP SCREW SCHEDULE – 19/32" (5/8" NOM) PLYWOOD	9/1/2026	00	
A-505	PANEL CLIP SCREW SCHEDULE – 19/32" (5/8" NOM) OSB	9/1/2026	00	
A-506	PANEL CLIP SCREW SCHEDULE – CONCRETE	9/1/2026	00	
A-507	PANEL CLIP SCREW SCHEDULE – CMU	9/1/2026	00	
M-101	SHAPE PROFILES	9/1/2026	00	
M-102	INSERT STRIP SIZES	9/1/2026	00	
M-103	ALTERNATE PUSH-IN INSERT STRIP – CONFINED AREAS	9/1/2026	00	

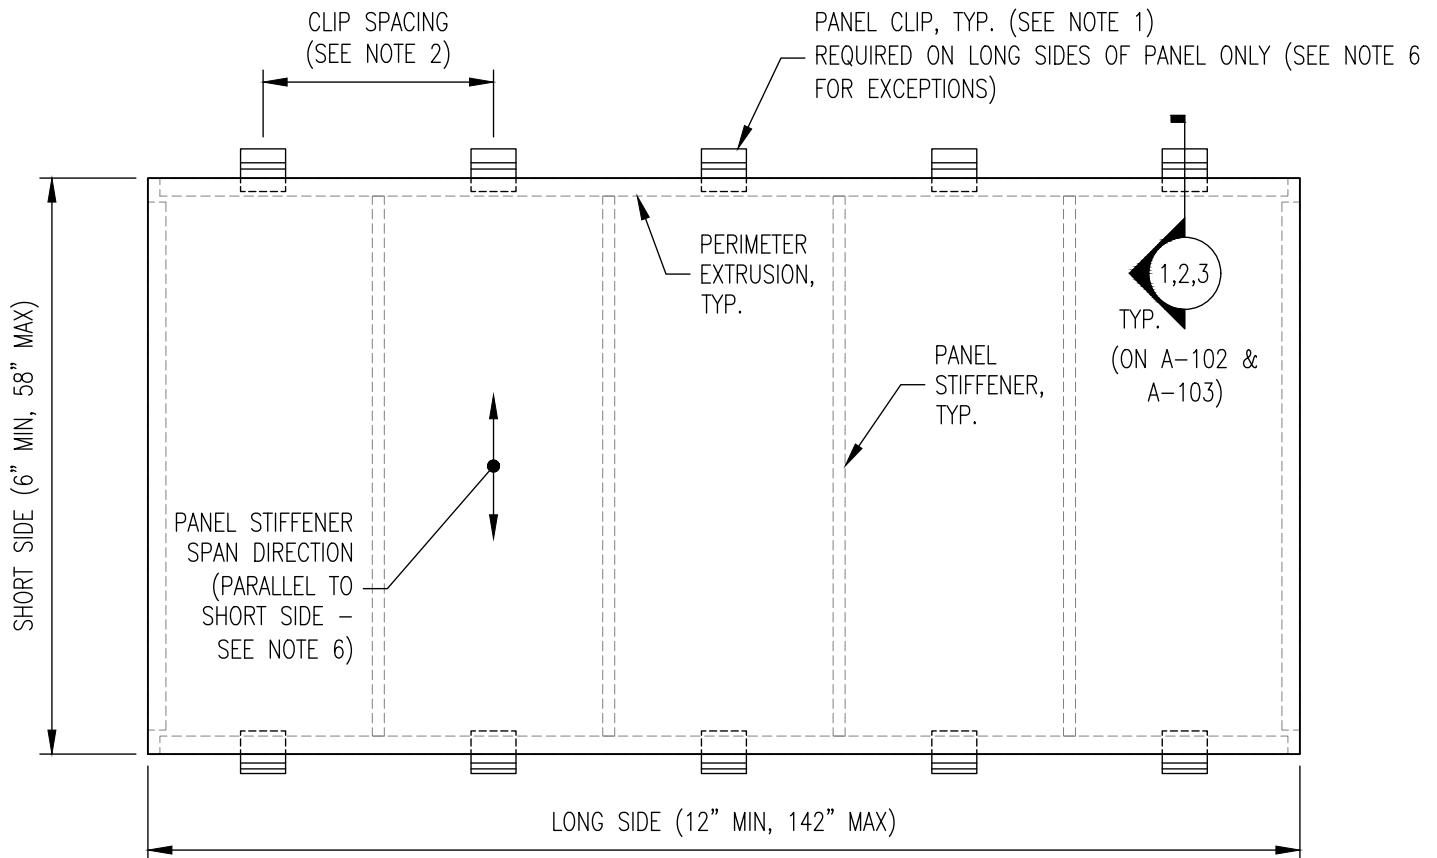

1 TYPICAL FABRICATED PANEL
(VIEW FROM FRONT)

NOTES:

1. FOR MORE INFORMATION ON PANEL CLIPS, REFER TO A-102 & A-103
2. PANEL CLIP SPACING VARIES BY SUBSTRATE AND STRUCTURAL CAPACITY; REFER TO A-401 THRU A-406 FOR MORE INFORMATION
3. REFER TO SHOP FABRICATION DETAILS FOR PANEL ASSEMBLY AND COMPONENT SPACING (STIFFENERS, RIVETS, ETC.)
4. REFER TO A-104 FOR SUBSTRATE COMPATIBILITY
5. REFER TO A-105 FOR FRAMING ALIGNMENT OPTIONS
6. REFER TO A-106 FOR CONDITIONS WHERE PANEL STIFFENER SPAN MAY BE ROTATED AND PANEL CLIPS ARE LOCATED ON SHORT SIDES OF PANEL; PANEL STIFFENER SPAN IS DEFINED AS DISTANCE BETWEEN CLIP ATTACHMENT SIDES
7. REFER TO A-107 FOR NFPA 285 COMPLIANCE OPTIONS
8. REFER TO A-108 FOR JOINT ALIGNMENT & AIR GAP



LAMINATORS
Composite Panel Solutions

www.LaminatorsInc.com

800.523.2347

FABRICATED PANEL OVERVIEW

ADAPTACLAD RS

DESIGN & INSTALLATION DETAILS


Date:
9/1/2026

Drawn By:
JJM

Detail Set:
AC-RS

Dwg. No.:
A-101

Rev:
00

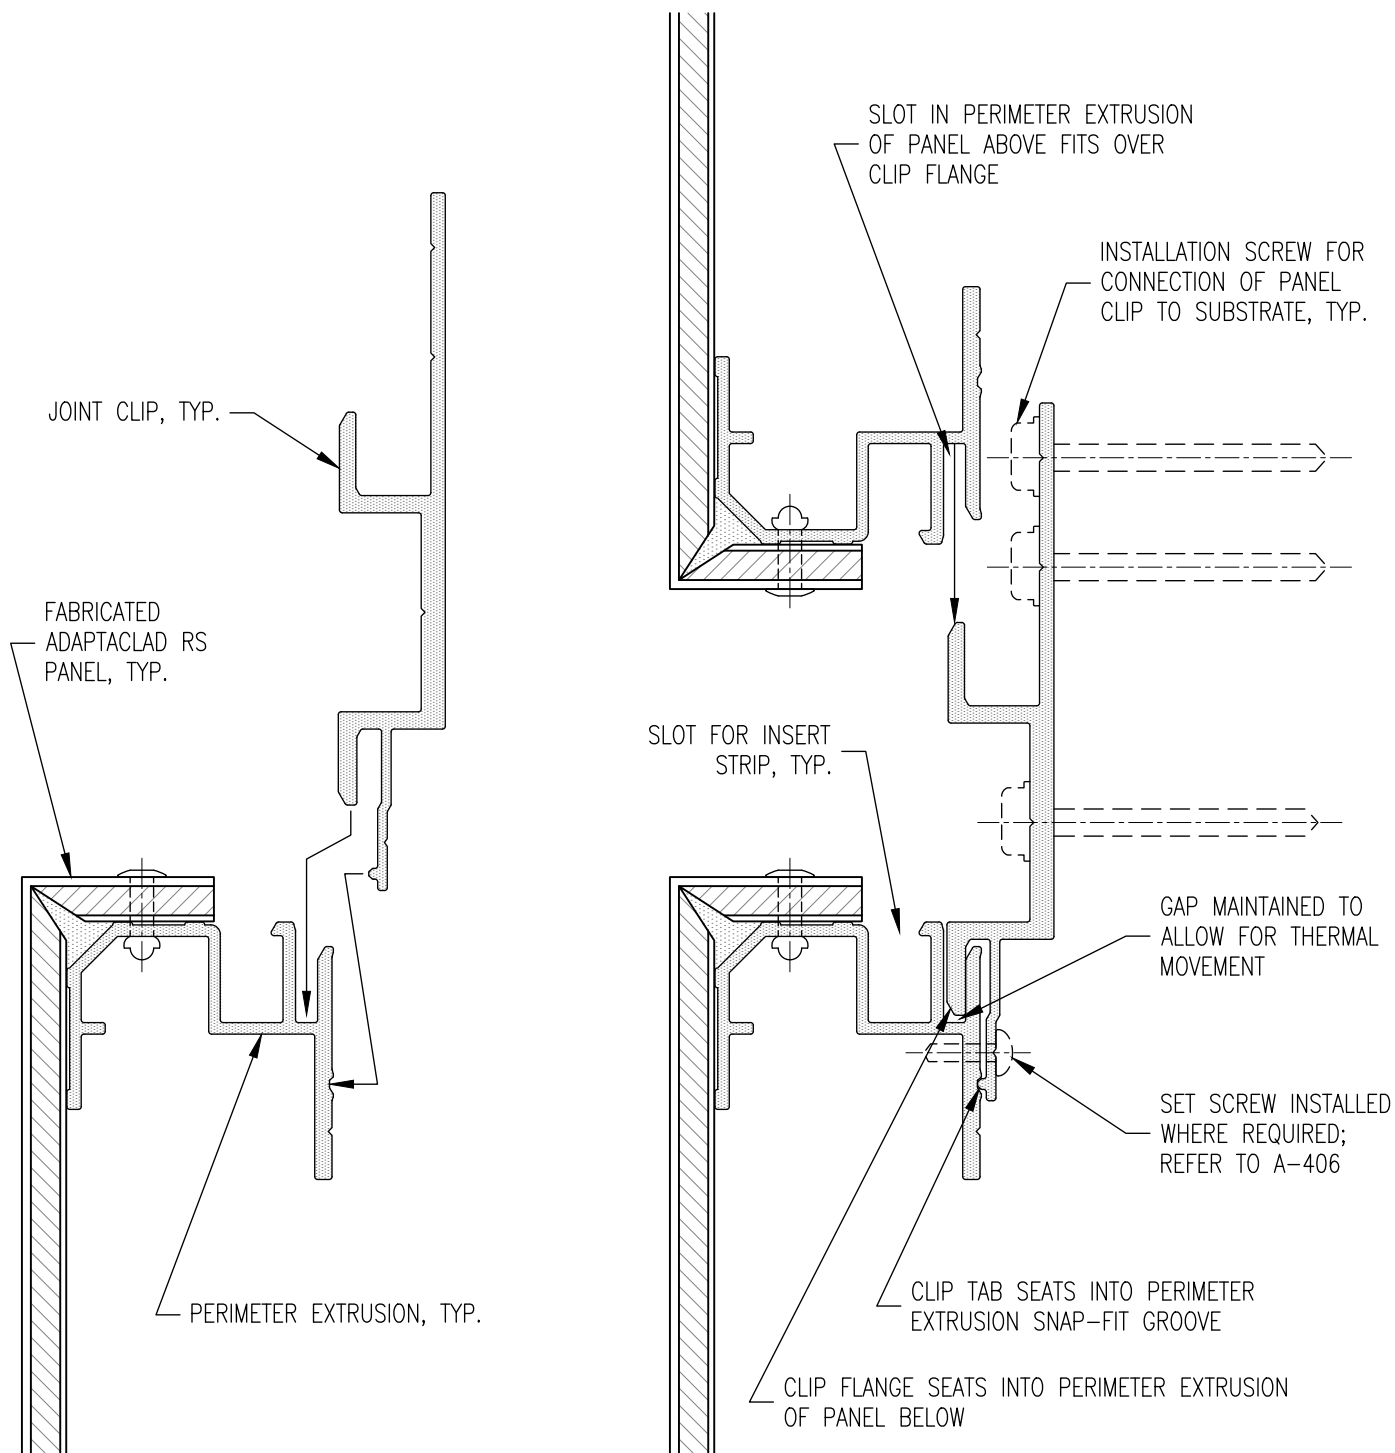

1 SECTIONS
JOINT CLIP



LAMINATORS
Composite Panel Solutions

www.LaminatorsInc.com

800.523.2347

JOINT CLIP OVERVIEW

ADAPTACLAD RS

DESIGN & INSTALLATION DETAILS



Date:
9/1/2026

Drawn By:
JJM

Detail Set:
AC-RS

Dwg. No.:
A-102



Rev:
00

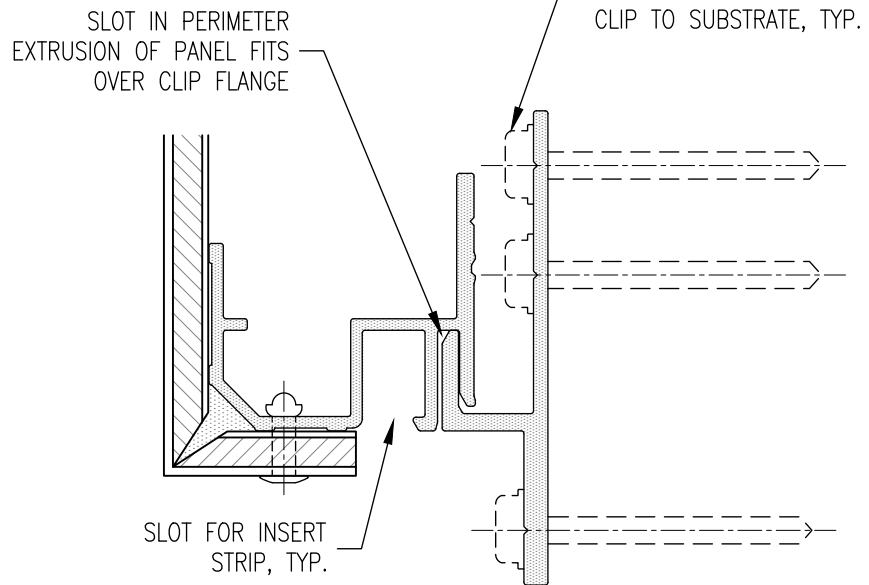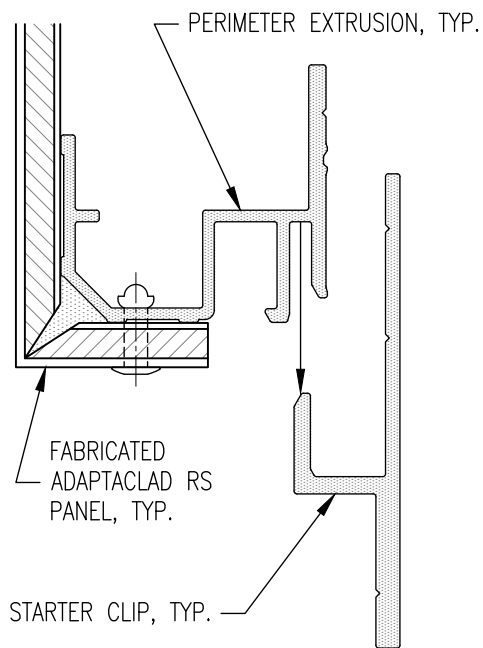

2

SECTIONS STARTER CLIP

NOTE: STARTER CLIPS INSTALLED TO SUBSTRATE PRIOR TO PANEL MODULE INSTALLATION

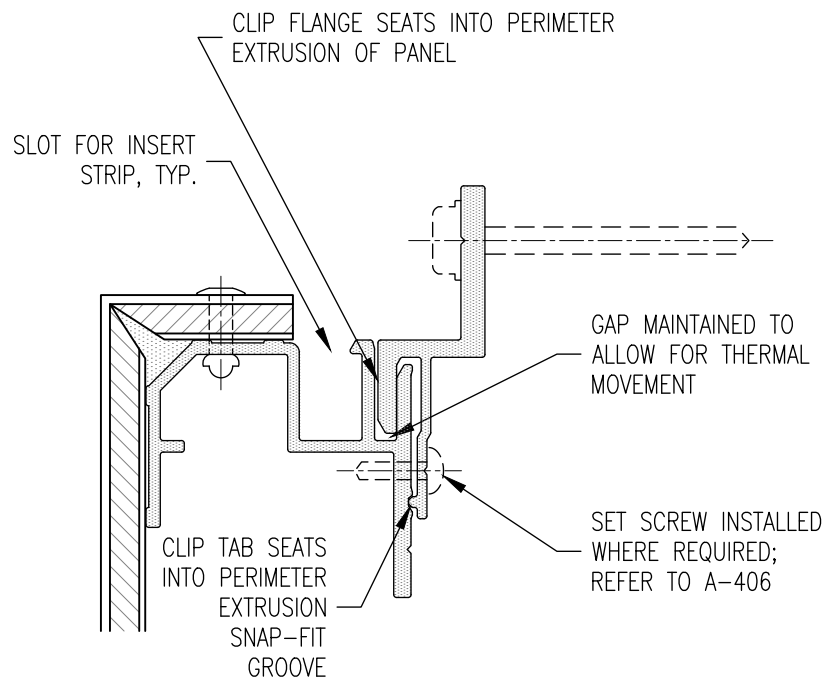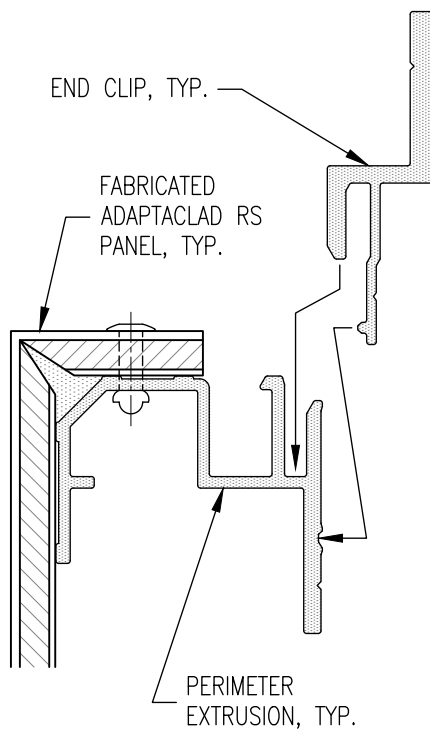

3

SECTIONS END CLIP

NOTE: SOME CONDITIONS REQUIRE STAGGERED END CLIPS ON ADJACENT PANELS; REFER TO A-312, A-314, A-404, & A-405



LAMINATORS
Composite Panel Solutions

www.LaminatorsInc.com

800.523.2347

STARTER & END CLIP OVERVIEW

ADAPTA CLAD RS

DESIGN & INSTALLATION DETAILS

Date:
9/1/2026

Drawn By:
JJM

Detail Set:
AC-RS

Dwg. No.:
A-103

Rev:
00

TABLE 1: SUBSTRATE COMPATIBILITY			
SUBSTRATE TYPE ¹		MINIMUM CRITERIA	MAXIMUM STRUCTURAL CAPACITY (PSF) [ASD]
COLD-FORMED STEEL FRAMING ² (CFSF)	24" SPACING	18 GA. (43 MILS) F _U = 45 KSI (GRADE 33) 1-1/4" FACE WIDTH	40
	16" SPACING		60
	ALIGNED		100
PLYWOOD ³		15/32" (1/2" NOM)	60
		19/32" (5/8" NOM)	100
OSB ⁴		19/32" (5/8" NOM)	60
CONCRETE		NORMAL WEIGHT 2,500 PSI	100
CMU (ASTM C90)		NORMAL WEIGHT 2,000 PSI 1-1/4" FACE SHELL	100
1. INSTALLATION OVER OPEN FRAMING NOT PERMITTED (I.E., CONDITIONS EXPOSING BACK SIDE OF PANELS TO WIND LOADS OR OPEN TO INTERIOR SPACE) 2. REFER TO A-105 FOR FRAMING ALIGNMENT OPTIONS 3. STRUCTURAL CAPACITY BASED ON PULLOUT FROM PLYWOOD SHEATHING WITH SPECIFIC GRAVITY = 0.55 (SOUTHERN PINE) 4. STRUCTURAL CAPACITY BASED ON PULLOUT FROM OSB SHEATHING WITH SPECIFIC GRAVITY = 0.49 (SOUTHERN PINE)			



LAMINATORS
Composite Panel Solutions

www.LaminatorsInc.com

800.523.2347

SUBSTRATE COMPATIBILITY

ADAPTA CLAD RS

DESIGN & INSTALLATION DETAILS


Date:
9/1/2026

Drawn By:
JJM


Detail Set:
AC-RS

Dwg. No.:
A-104


Rev:
00

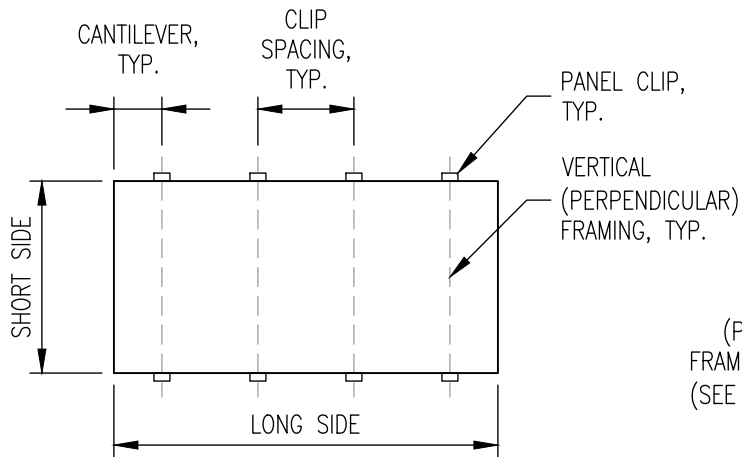


1 TYPICAL LANDSCAPE PANEL
VERTICAL FRAMING (PERPENDICULAR)

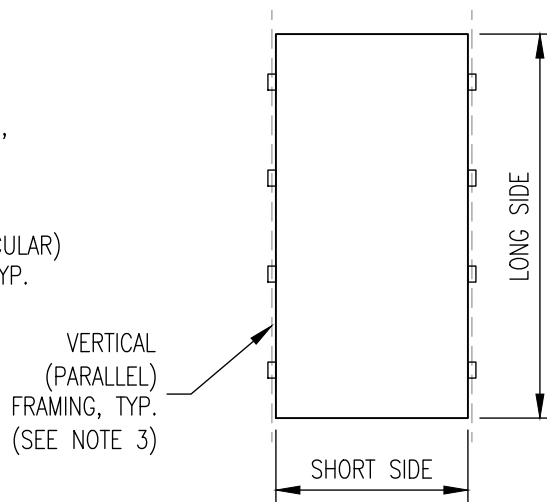

2 TYPICAL PORTRAIT PANEL
VERTICAL FRAMING (ALIGNED)

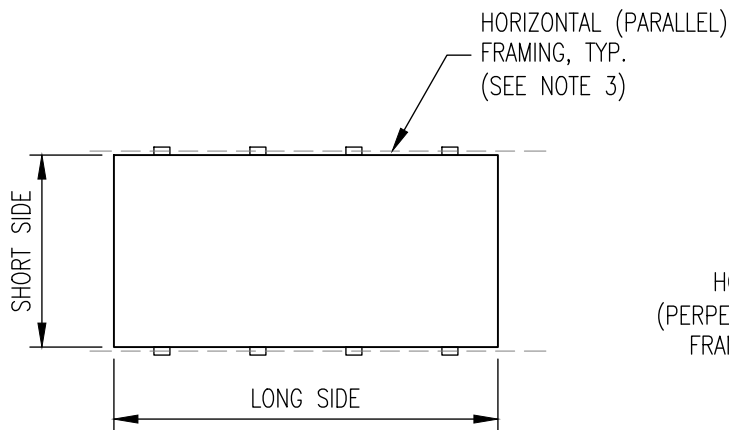

3 TYPICAL LANDSCAPE PANEL
HORIZONTAL FRAMING (ALIGNED)

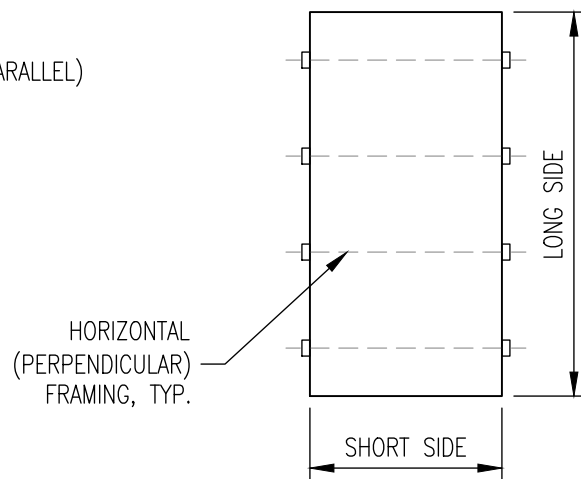

4 TYPICAL PORTRAIT PANEL
HORIZONTAL FRAMING (PERP.)

NOTES:

1. PANEL CLIPS REQUIRED ON LONG SIDES OF PANEL ONLY
2. PANEL CLIPS CAN INTERFACE WITH VERTICAL OR HORIZONTAL FRAMING PERPENDICULAR OR PARALLEL TO THE LONG SIDES OF PANEL AS SHOWN ABOVE
3. VERTICAL OR HORIZONTAL FRAMING PARALLEL TO THE LONG SIDES OF PANEL REQUIRES ALIGNED FRAMING WHERE PANEL JOINT CENTERLINE IS ALIGNED WITH FACE FLANGE OF FRAMING; REFER TO A-108 FOR ALIGNMENT EXAMPLE
4. ALIGNED FRAMING IS REQUIRED FOR HIGHER WIND LOAD CAPACITIES (AS INDICATED ON A-104) WHERE TIGHTER CLIP SPACING AND CANTILEVER LIMITS MAKE FRAMING COORDINATION DIFFICULT



LAMINATORS
Composite Panel Solutions

www.LaminatorsInc.com

800.523.2347

FRAMING ALIGNMENT OPTIONS

ADAPTACLAD RS

DESIGN & INSTALLATION DETAILS


Date:
9/1/2026

Drawn By:
JJM


Detail Set:
AC-RS

Dwg. No.:
A-105

Rev:
00

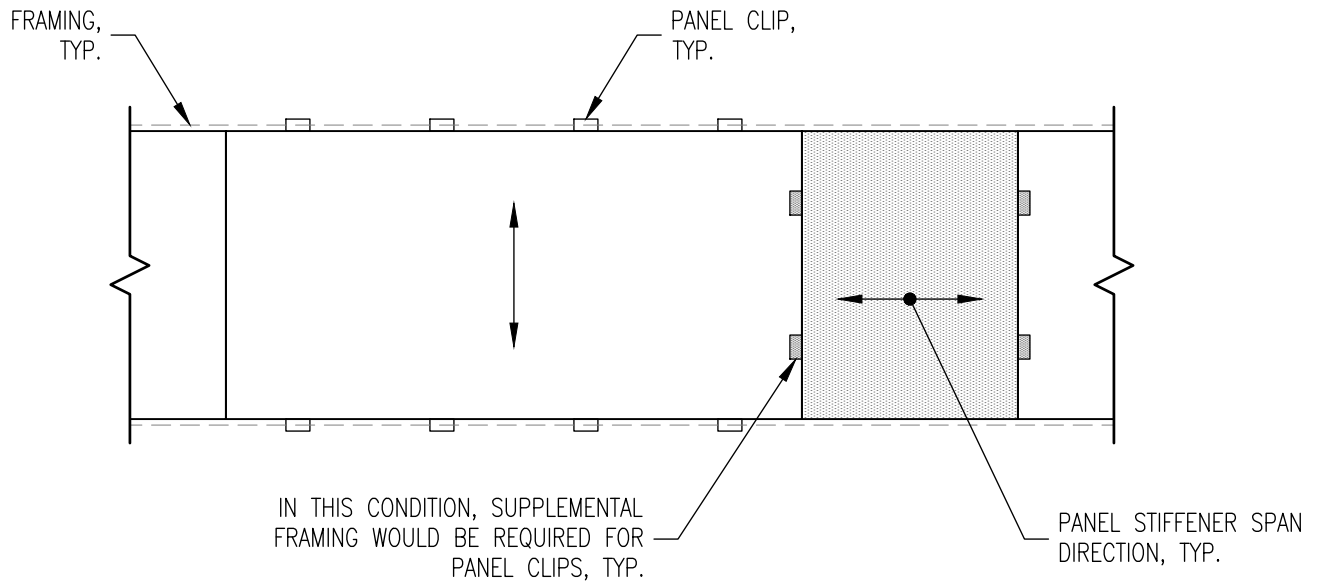

1 PARTIAL ELEVATION TYP. SPAN DIRECTIONS

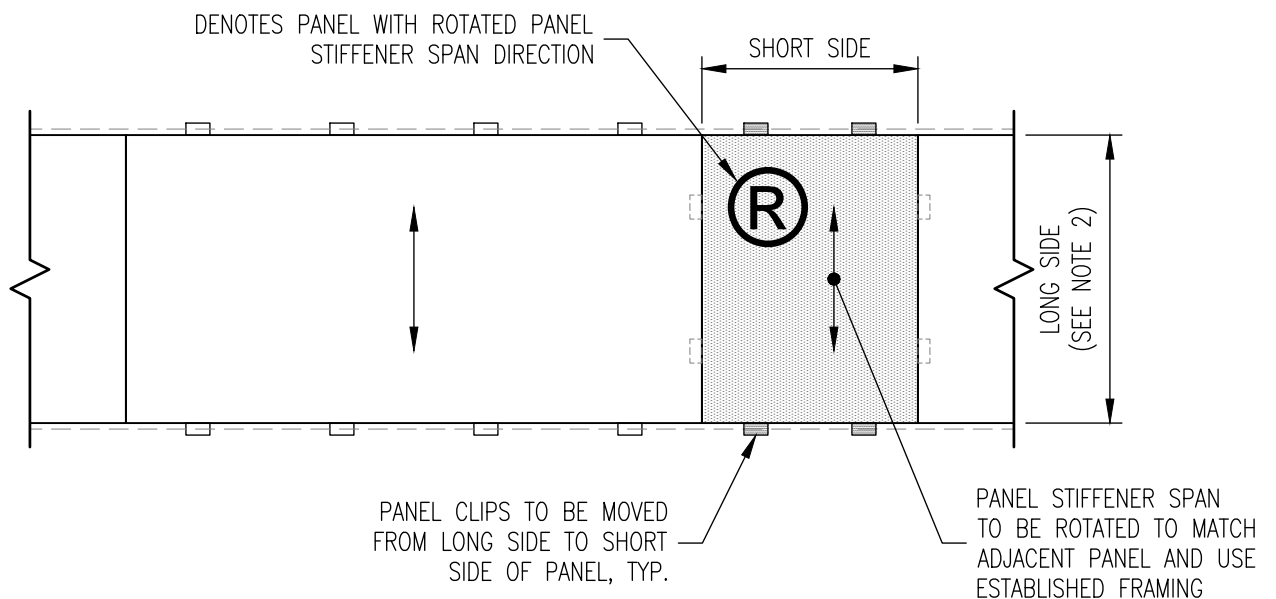

2 PARTIAL ELEVATION ROTATED SPAN DIRECTION

NOTES:

1. ELEVATIONS ARE REPRESENTATIVE (E.G., FRAMING MAY BE HORIZONTAL OR VERTICAL); PROJECT-SPECIFIC CONDITIONS WILL VARY
2. ROTATED PANEL STIFFENER SPAN DIRECTION PERMITTED FOR PANELS WITH LONG SIDES UP TO 58"
3. ROTATED PANEL STIFFENER SPAN DIRECTION MUST BE COORDINATED WITH SHOP DRAWINGS BASED ON PROJECT-SPECIFIC CONDITIONS

TABLE 2: NFPA 285 COMPLIANCE OPTIONS ^{1 2 3}

BASE WALL	EXTERIOR SHEATHING	CONTINUOUS INSULATION	Z-GIRT	MAXIMUM PERMITTED AIR GAP ⁴
STUD FRAMING ⁵	EXTERIOR GRADE GYPSUM SHEATHING ⁶	RIGID POLYISO ⁸ 4-1/2" (MAX) THICKNESS	STEEL OR FIBERGLASS (HORIZONTAL ORIENTATION ONLY) NONE REQUIRED WITH FRT PLYWOOD-FACED RIGID POLYISO	2-1/2"
	PLYWOOD SHEATHING ⁷	FRT PLYWOOD-FACED RIGID POLYISO ⁸ 4-1/8" (MAX) THICKNESS		
CONCRETE		MINERAL WOOL		
CMU				

1. COMPLIANCE OPTIONS PRESENTED ARE BASED ON TESTING PERFORMED BY LAMINATORS IN COMBINATION WITH AN ENGINEERING EVALUATION (EEV) PREPARED BY A THIRD-PARTY FIRE CONSULTANT
2. OPTIONS PRESENTED ARE NOT COMPREHENSIVE AND ADDITIONAL OPTIONS OR LIMITATIONS MAY EXIST BASED ON PROJECT-SPECIFIC CONDITIONS; CONTACT LAMINATORS TECHNICAL SERVICES FOR MORE INFORMATION
3. COMPLIANT AIR AND WATER BARRIER (AWB) / WATER-RESISTIVE BARRIER (WRB) PRODUCTS ARE INDICATED IN THE EEV AVAILABLE FROM LAMINATORS
4. MAXIMUM PERMITTED AIR GAP IS MEASURED FROM FACE OF SHEATHING (OR EXTERIOR INSULATION, IF PRESENT) TO INTERIOR FACE OF ADAPTA CLAD RS PANEL (REFER TO A-108)
5. 18 GA. (MIN) CFSF; FRT (FIRE-RETARDANT-TREATED) WOOD FRAMING MAY BE PERMITTED IN SOME ASSEMBLIES
6. 1/2" (MIN)
7. FRT PLYWOOD MAY BE PERMITTED IN SOME ASSEMBLIES; MAY REQUIRE A LAYER OF EXTERIOR GRADE GYPSUM SHEATHING BEHIND THE FRT PLYWOOD
8. SPECIFIC COMPLIANT PRODUCTS ARE INCLUDED IN THE EEV AVAILABLE FROM LAMINATORS

IMPORTANT NOTICE: THE DESIGN PROFESSIONAL OF RECORD (DPR) IS RESPONSIBLE FOR ESTABLISHING NFPA 285 COMPLIANCE FOR ANY WALL ASSEMBLY INCORPORATING COMBUSTIBLE COMPONENTS AS REQUIRED BY APPLICABLE BUILDING CODE. LAMINATORS TAKES NO RESPONSIBILITY FOR NFPA 285 COMPLIANCE RELATED TO WALL ASSEMBLIES INCORPORATING LAMINATORS PRODUCTS THAT ARE NOT DOCUMENTED UNDER ONE OF THE FOLLOWING: 1) SPECIFIC WALL ASSEMBLIES TESTED BY LAMINATORS, OR 2) AN ENGINEERING EVALUATION (EEV) SUPPLIED BY LAMINATORS FROM A THIRD-PARTY FIRE CONSULTANT. IF DOCUMENTED COMPLIANCE IS NOT AVAILABLE FROM LAMINATORS FOR THE PROPOSED WALL ASSEMBLY, THE DPR IS RESPONSIBLE FOR CONTACTING A THIRD-PARTY FIRE CONSULTANT TO ESTABLISH COMPLIANCE VIA A SEPARATE EEV OR MODIFYING THE PROPOSED WALL ASSEMBLY TO A COMPLIANT CONDITION.



LAMINATORS
Composite Panel Solutions

www.LaminatorsInc.com

800.523.2347

NFPA 285 COMPLIANCE OPTIONS

ADAPTA CLAD RS

DESIGN & INSTALLATION DETAILS


Date:
9/1/2026

Drawn By:
JJM

Detail Set:
AC-RS

Dwg. No.:
A-107

Rev:
00

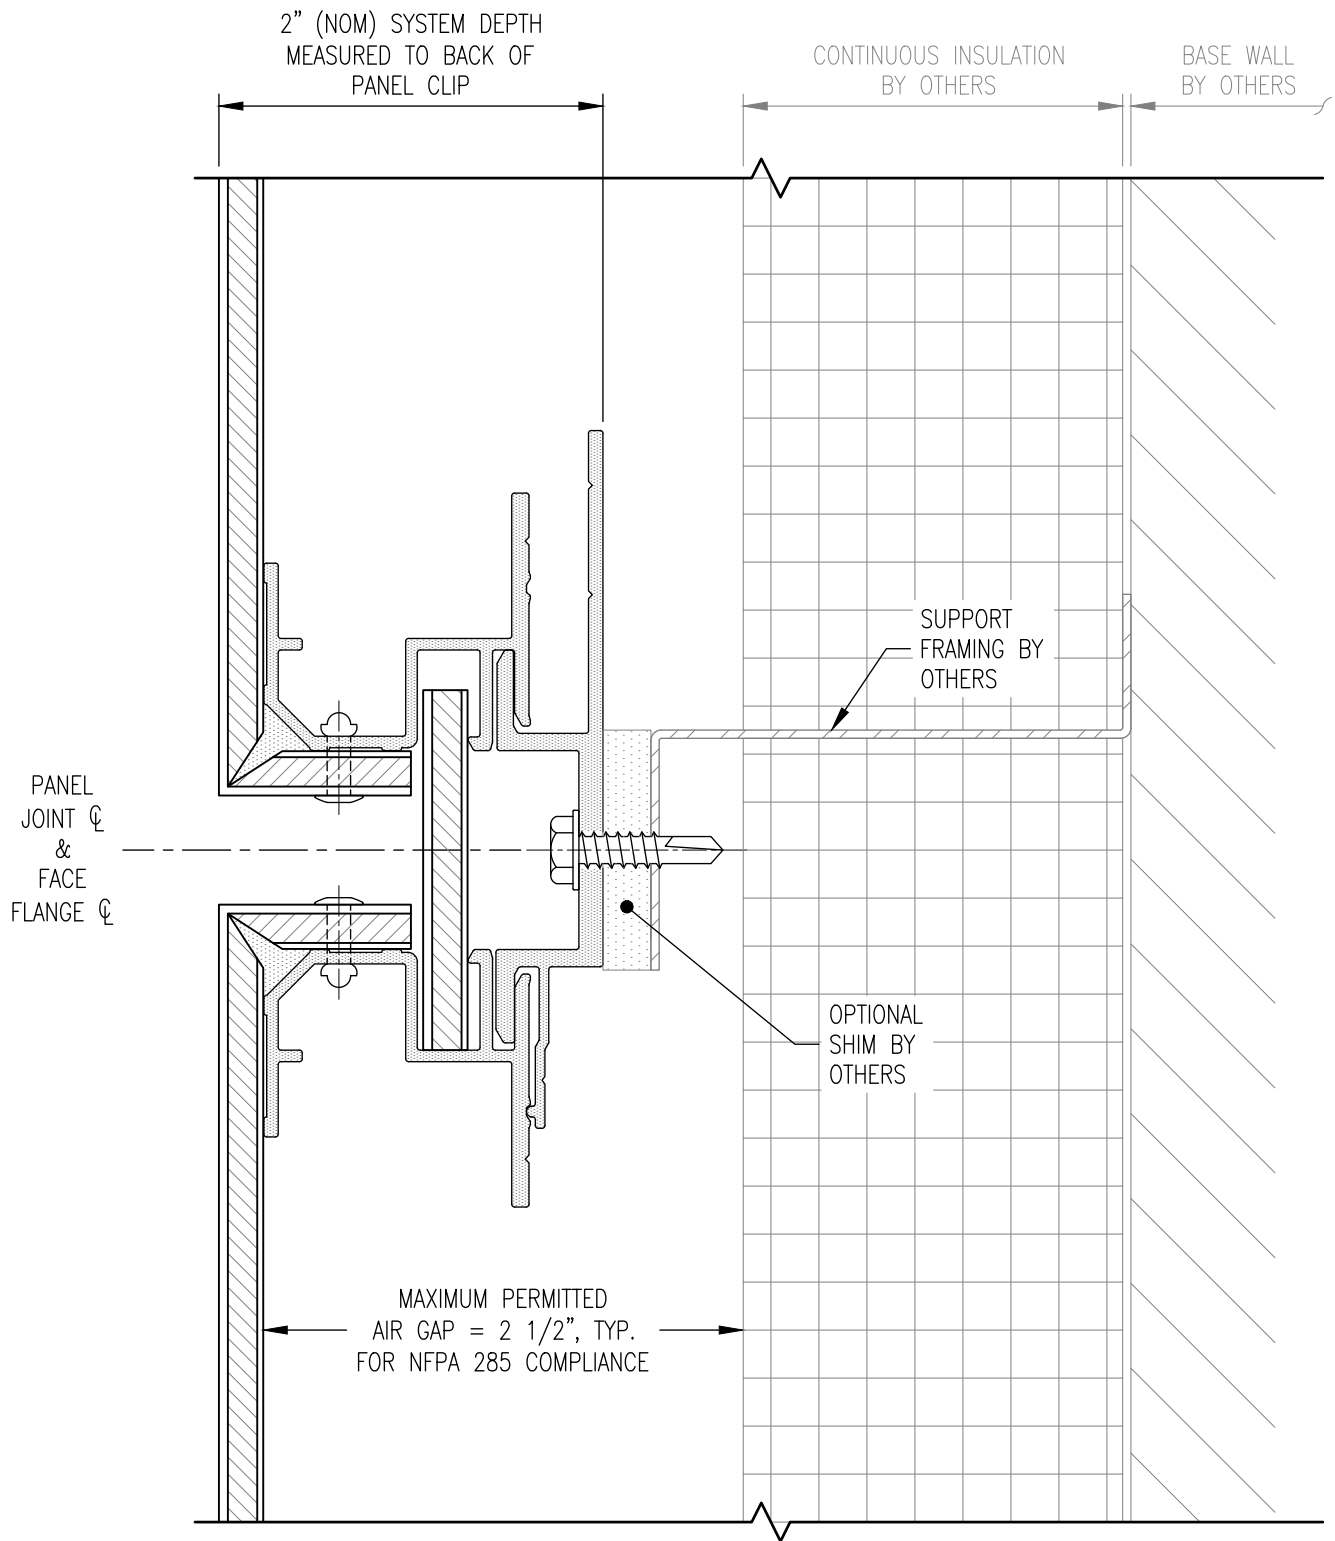

A-108 SECTION



LAMINATORS
Composite Panel Solutions

www.LaminatorsInc.com

800.523.2347

JOINT ALIGNMENT & AIR GAP

ADAPTACLAD RS

DESIGN & INSTALLATION DETAILS


Date:
9/1/2026

Drawn By:
JJM

Detail Set:
AC-RS

Dwg. No.:
A-108

Rev:
00

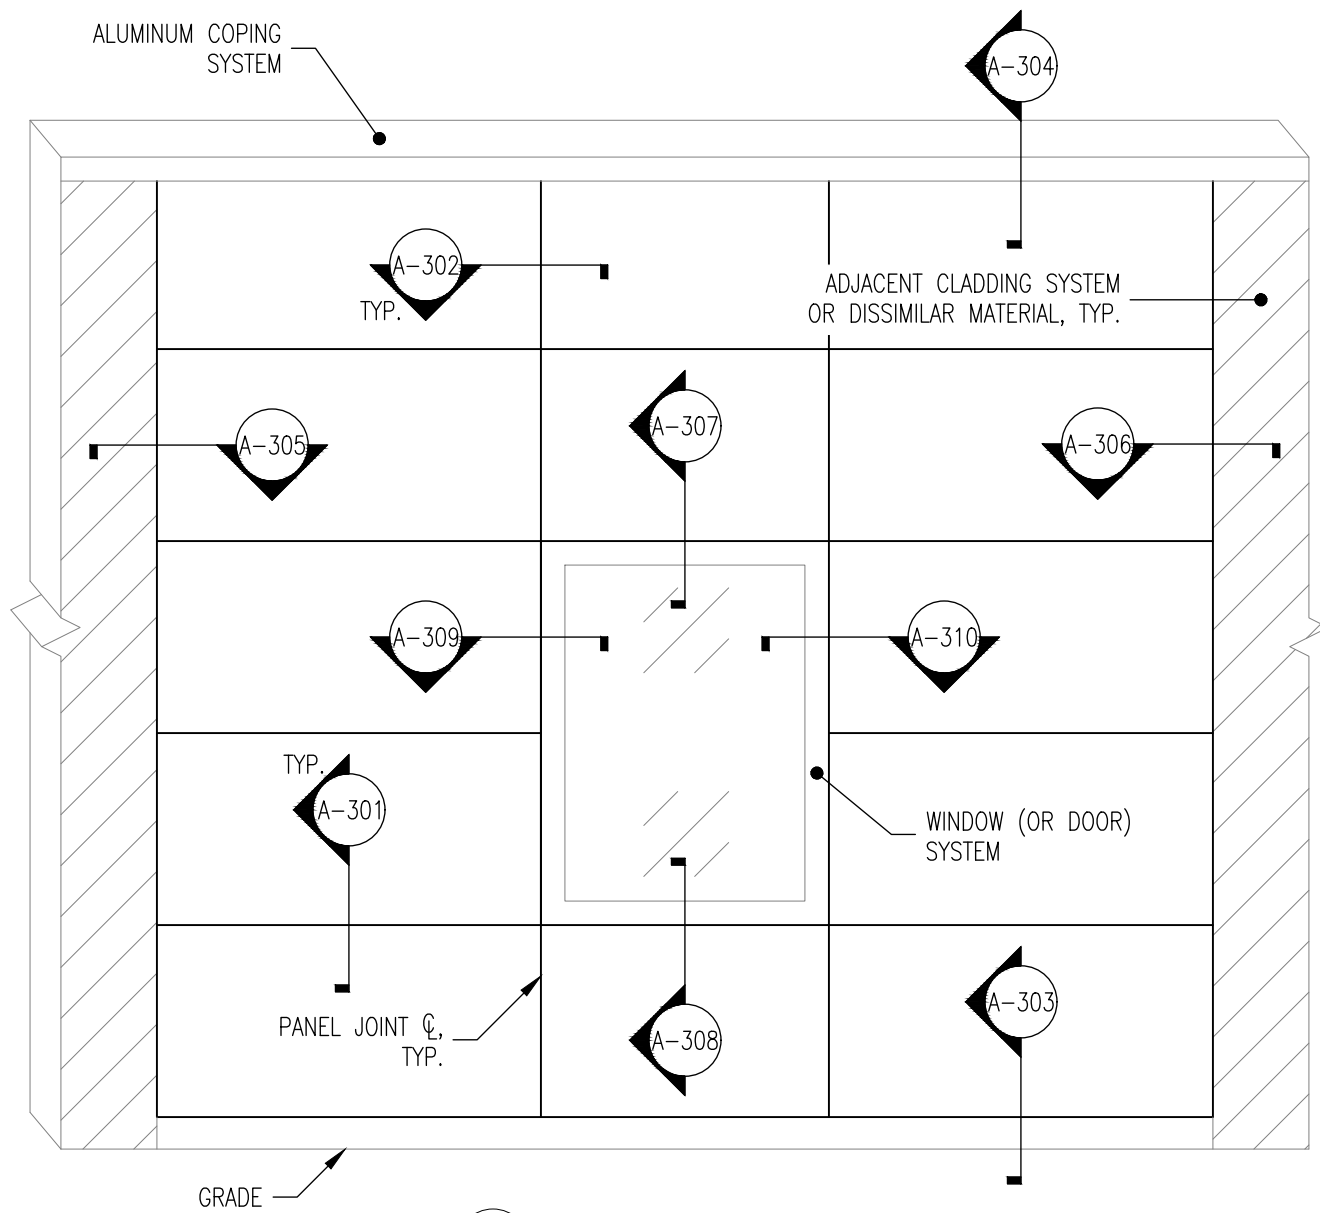

1 TYPICAL ELEVATION
JOINTS, EDGES, & OPENINGS

NOTES:

1. ELEVATION IS REPRESENTATIVE; PROJECT-SPECIFIC CONDITIONS WILL VARY
2. PROJECT-SPECIFIC SUBSTRATE CONDITIONS MAY REQUIRE SUPPLEMENTAL FRAMING



LAMINATORS
Composite Panel Solutions

www.LaminatorsInc.com

800.523.2347

TYPICAL ELEVATION - JOINTS, EDGES, & OPENINGS

ADAPTACLAD RS

DESIGN & INSTALLATION DETAILS


Date:
4/8/2024

Drawn By:
JJM

Detail Set:
AC-RS

Dwg. No.:
A-201

Rev:
00

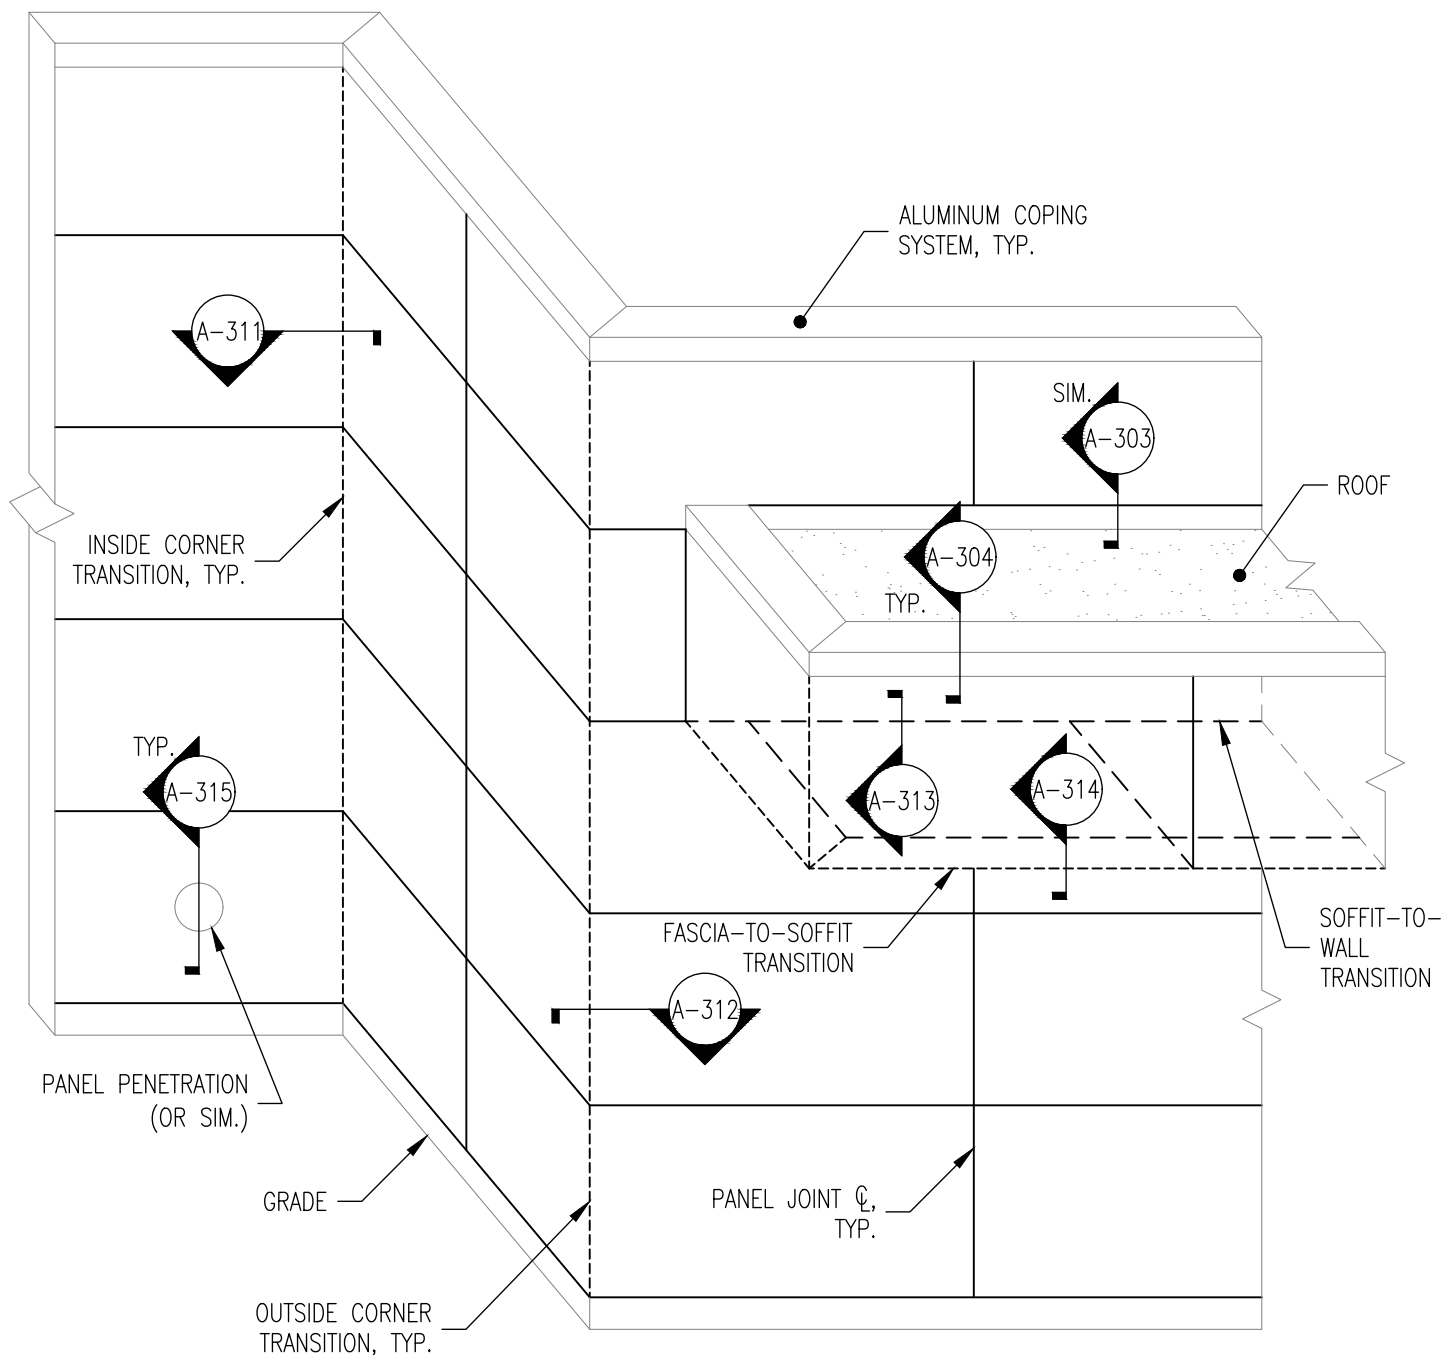

2 TYPICAL ELEVATION TRANSITIONS & PENETRATIONS

NOTES:

1. ELEVATION IS REPRESENTATIVE; PROJECT-SPECIFIC CONDITIONS WILL VARY
2. PROJECT-SPECIFIC SUBSTRATE CONDITIONS MAY REQUIRE SUPPLEMENTAL FRAMING
3. REFER TO A-203 FOR TRANSITION PANEL SIZE REQUIREMENTS



LAMINATORS
Composite Panel Solutions

www.LaminatorsInc.com

800.523.2347

TYPICAL ELEVATION - TRANSITIONS & PENETRATIONS

ADAPTACLAD RS

DESIGN & INSTALLATION DETAILS


Date:
9/1/2026

Drawn By:
JJM


Detail Set:
AC-RS

Dwg. No.:
A-202


Rev:
00

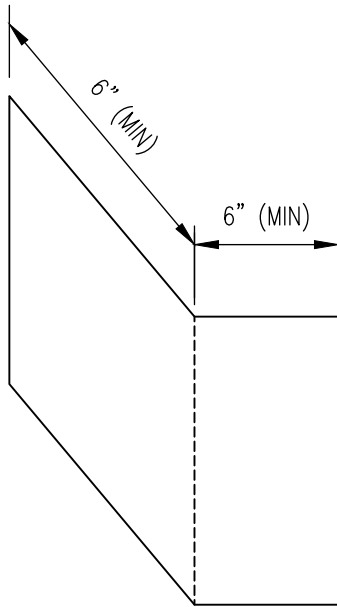

3 OUTSIDE CORNER
TRANSITION PANEL

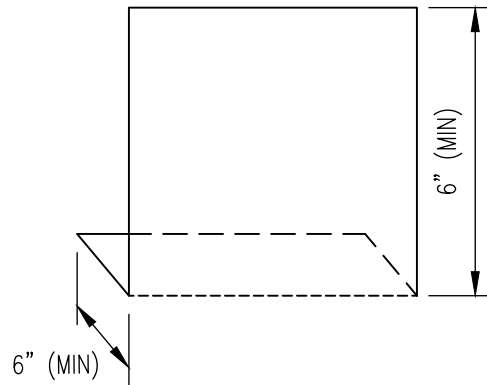

4 FASCIA-TO-SOFFIT
TRANSITION PANEL

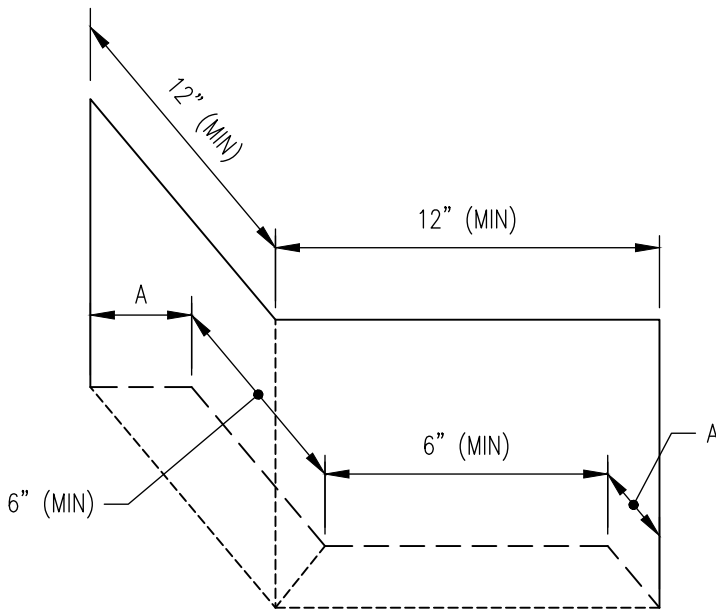

5 SOFFIT OUTSIDE CORNER
TRANSITION PANEL

TABLE 3: SOFFIT OUTSIDE CORNER RETURN LIMITS		
MAXIMUM STRUCTURAL CAPACITY (PSF) [ASD]	DIMENSION A MINIMUM (INCHES)	DIMENSION A MAXIMUM (INCHES)
40	6	20
60		12
100		8



LAMINATORS
Composite Panel Solutions

www.LaminatorsInc.com

800.523.2347

TRANSITION PANEL SIZE REQUIREMENTS

ADAPTACLAD RS

DESIGN & INSTALLATION DETAILS


Date:
9/1/2026

Drawn By:
JJM

Detail Set:
AC-RS

Dwg. No.:
A-203

Rev:
00

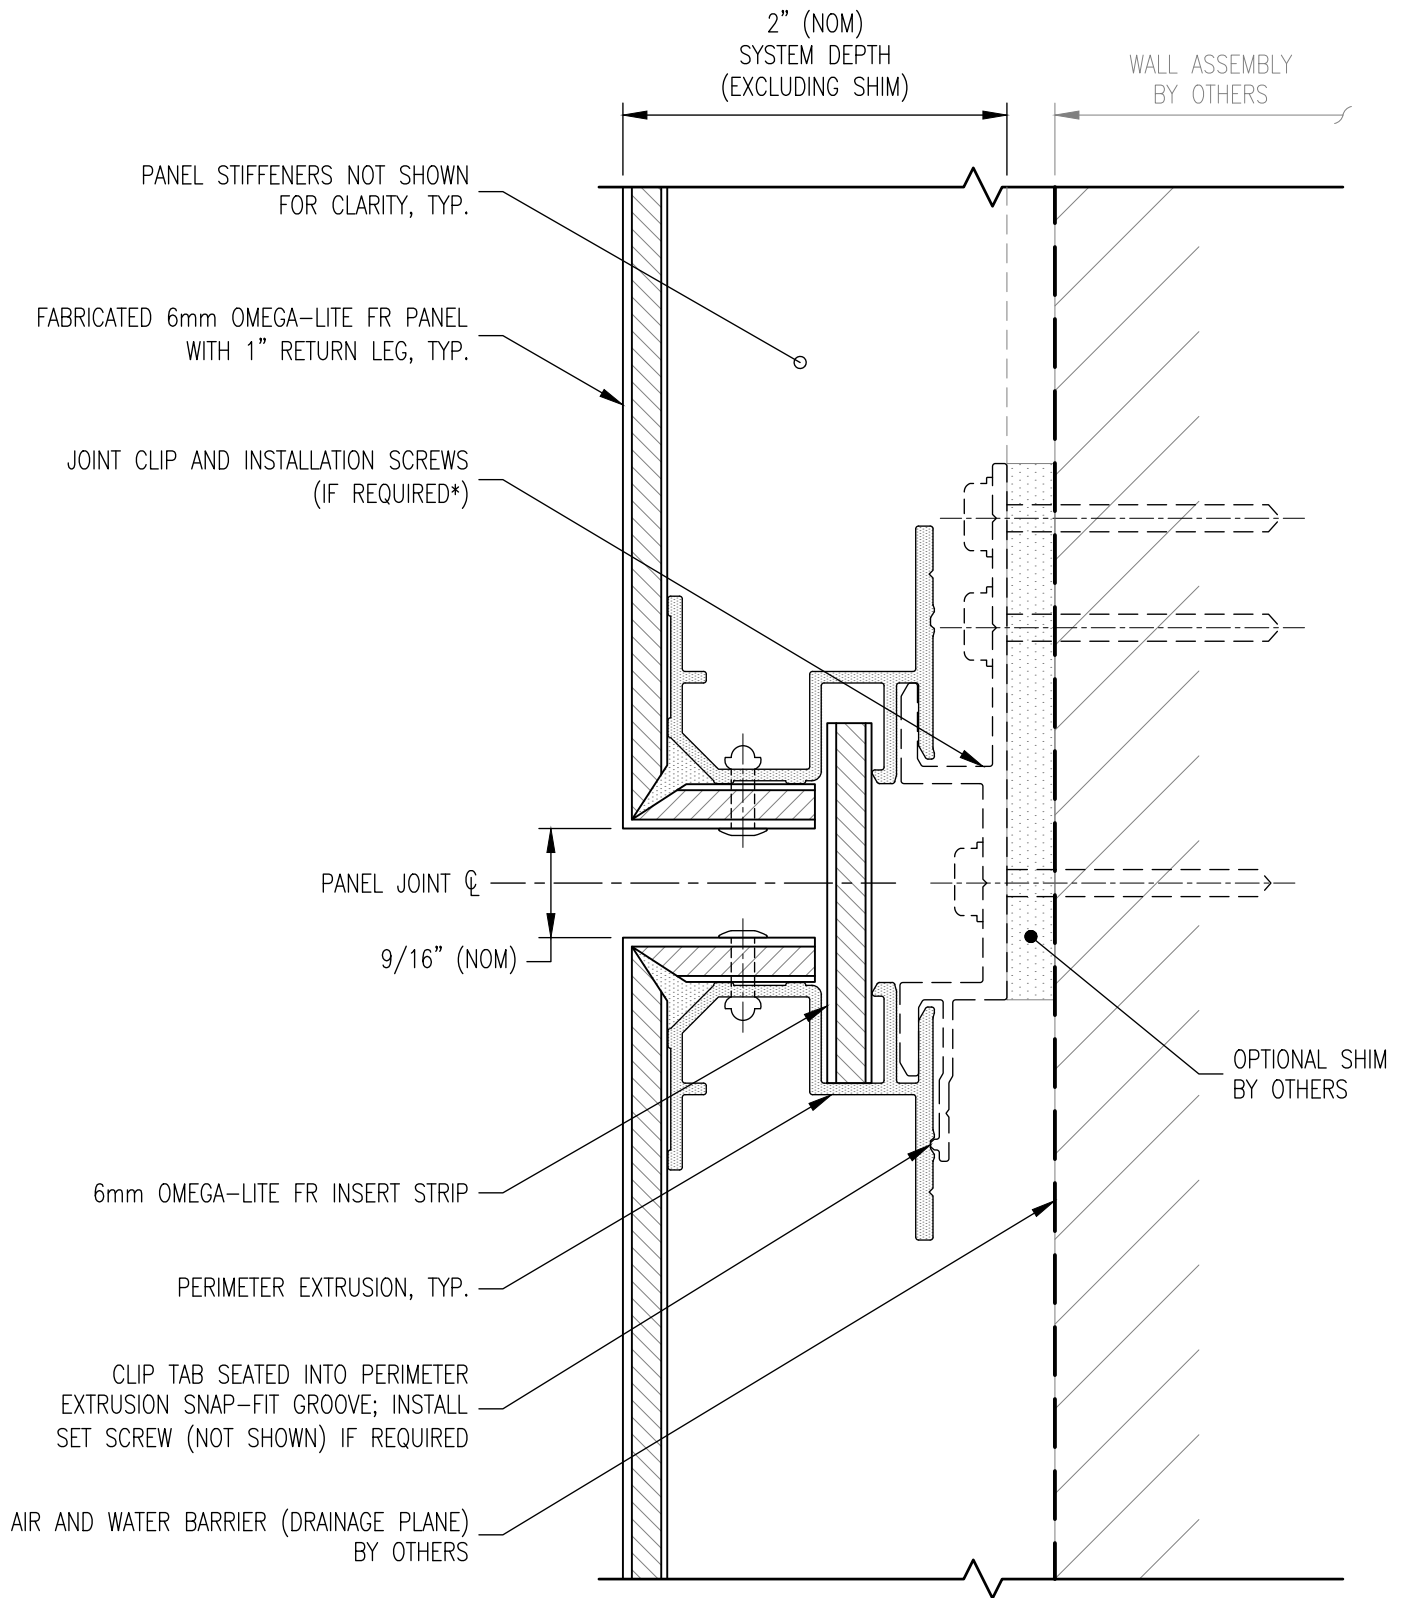

* PANEL CLIPS REQUIRED ON LONG
SIDES OF PANEL ONLY, TYP.



LAMINATORS
Composite Panel Solutions

www.LaminatorsInc.com

800.523.2347

HORIZONTAL JOINT DETAIL

ADAPTACLAD RS

DESIGN & INSTALLATION DETAILS

Date:
9/1/2026


Drawn By:
JJM

Detail Set:
AC-RS

Dwg. No.:
A-301

Rev:
00

* PANEL CLIPS REQUIRED ON LONG SIDES OF PANEL ONLY, TYP.

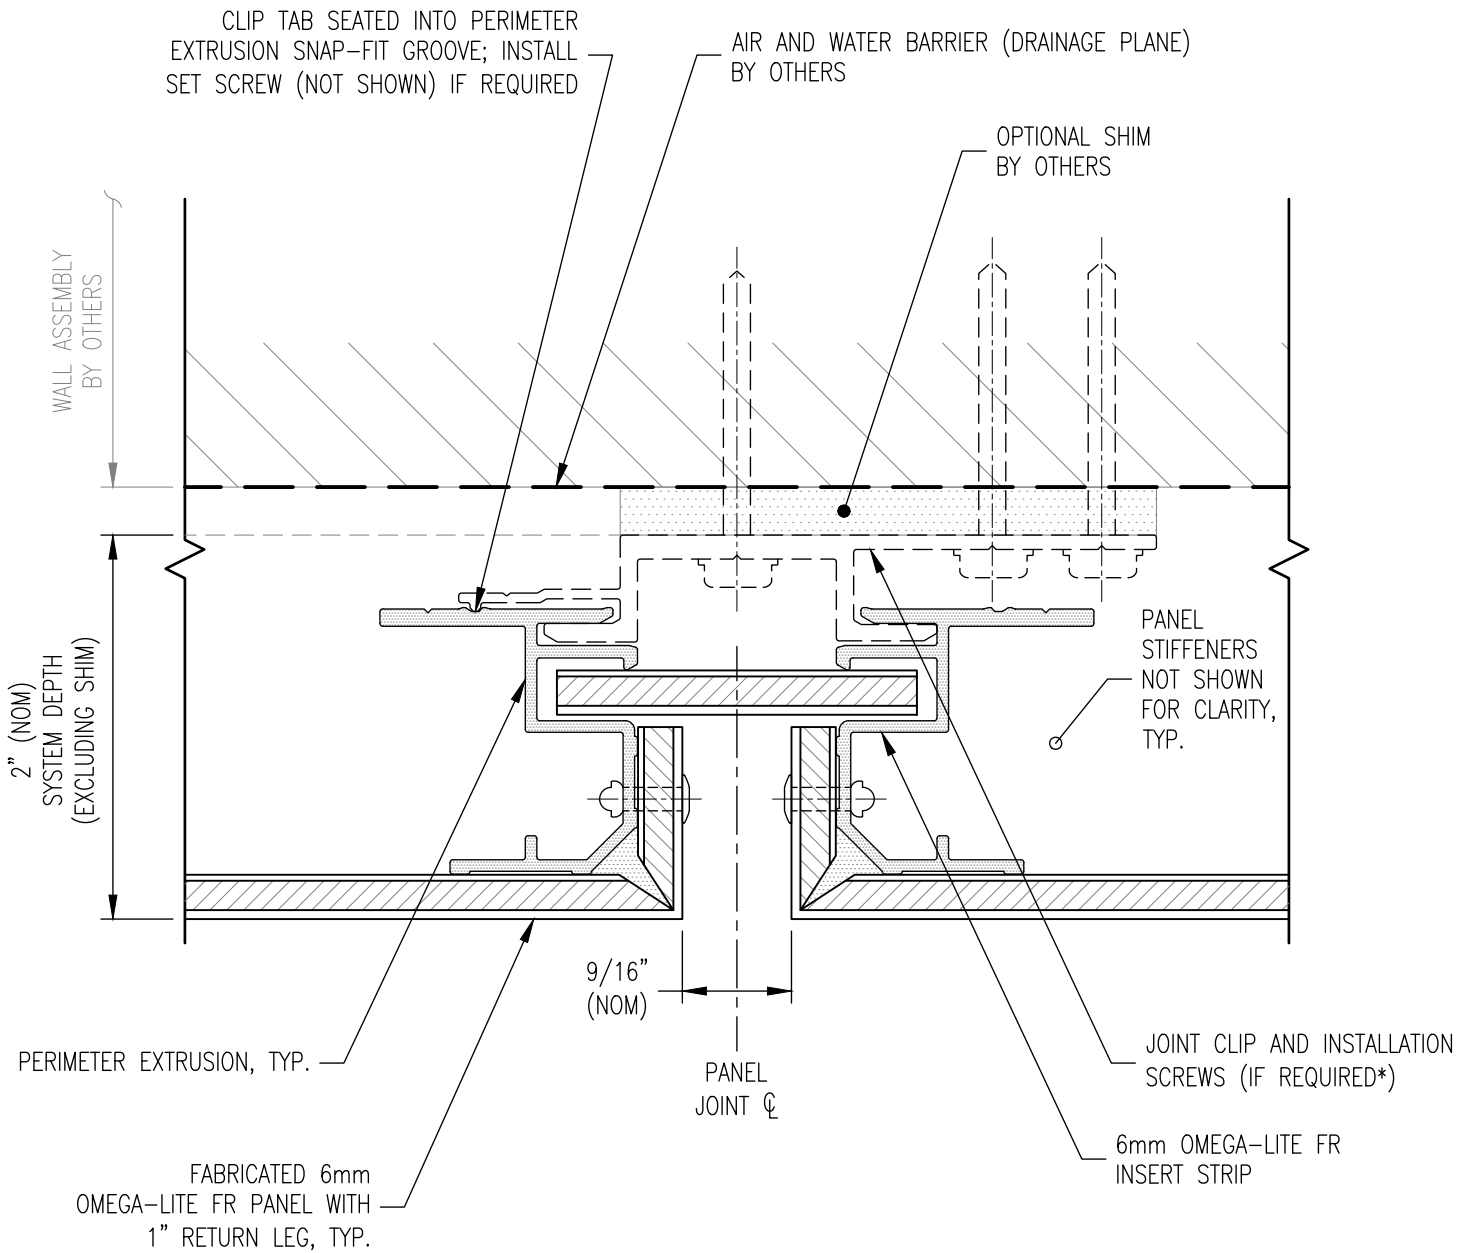

A-302 PLAN SECTION




LAMINATORS
Composite Panel Solutions

www.LaminatorsInc.com

800.523.2347

VERTICAL JOINT DETAIL				
ADAPTACLAD RS				
DESIGN & INSTALLATION DETAILS				
Date: 9/1/2026	Drawn By: JJM	Detail Set: AC-RS	Dwg. No.: A-302	Rev: 00

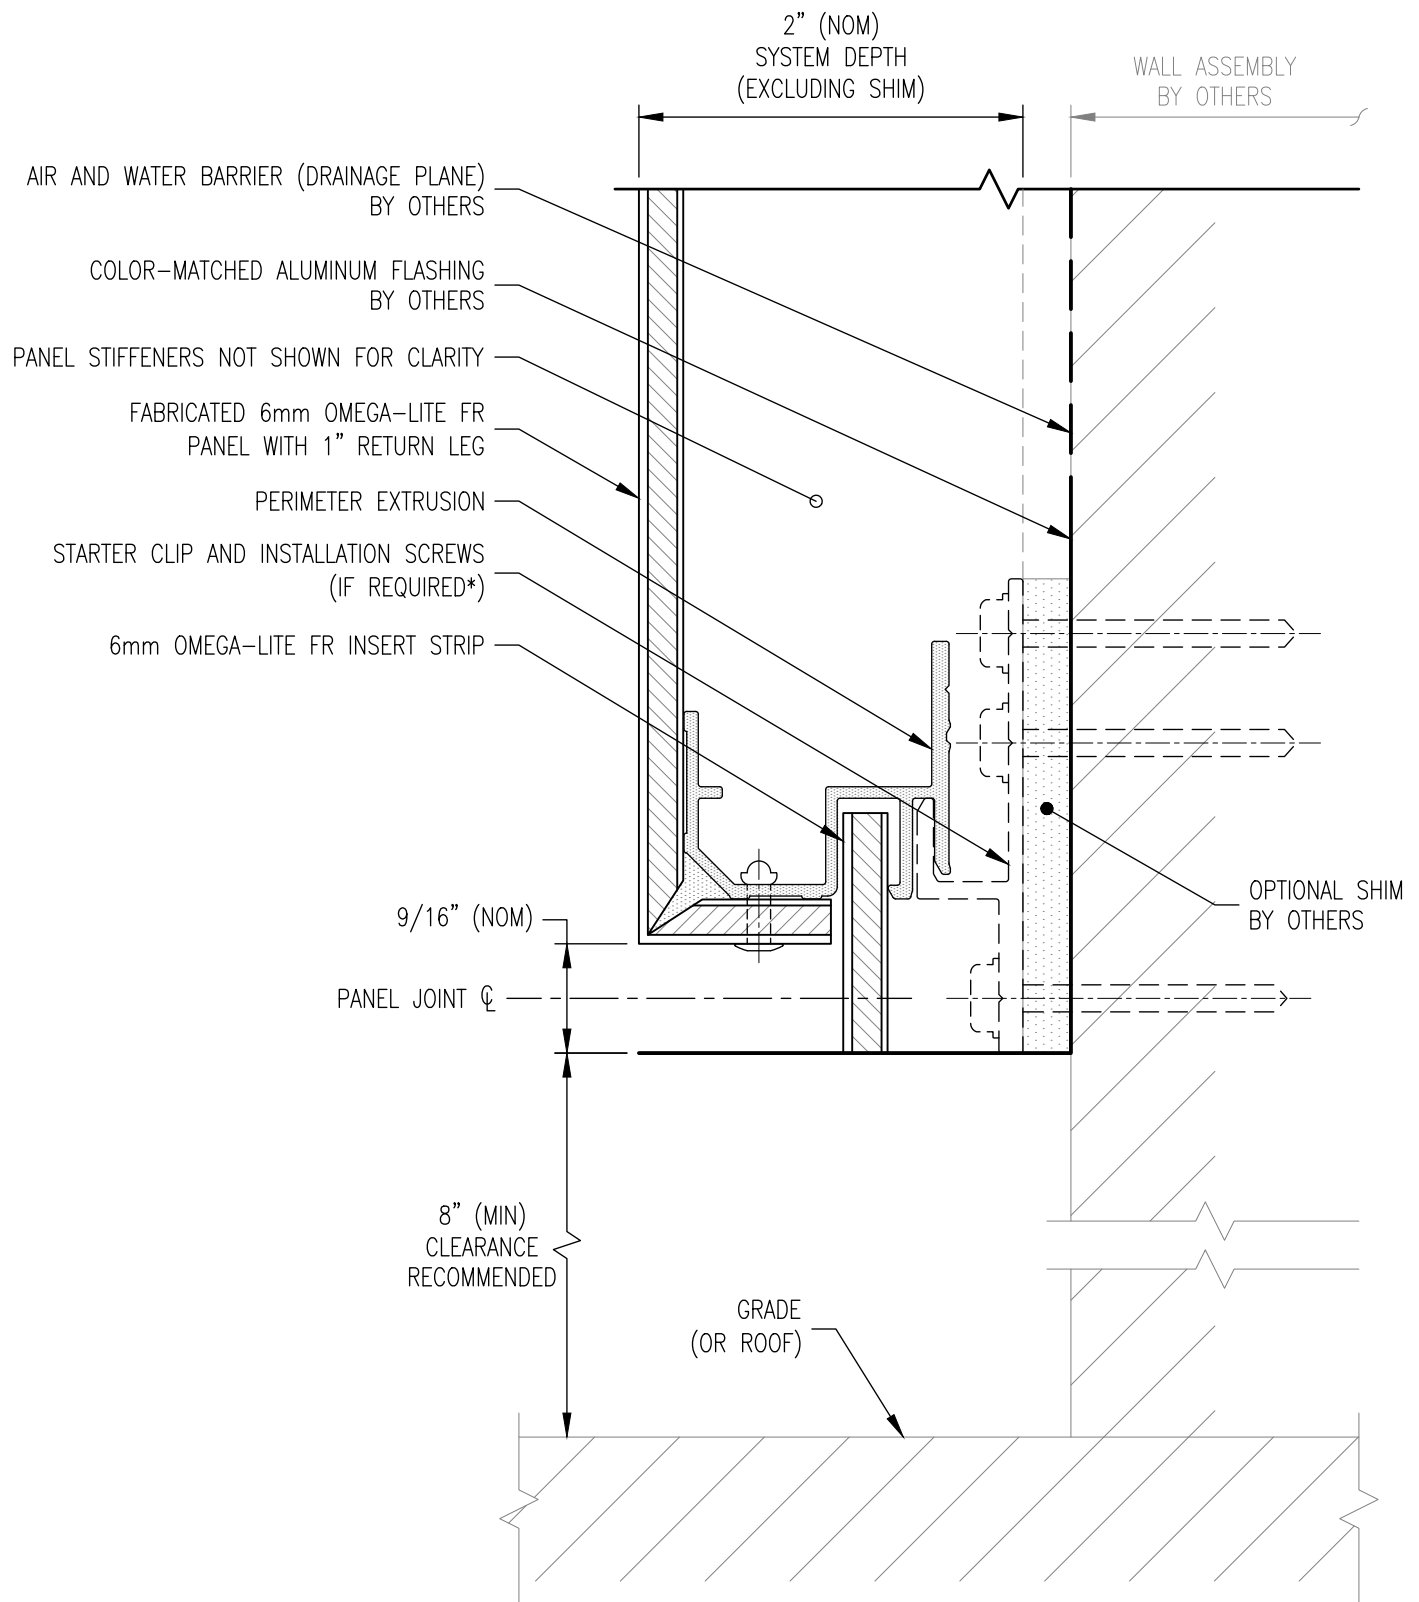

* PANEL CLIPS REQUIRED ON LONG
SIDES OF PANEL ONLY, TYP.



LAMINATORS
Composite Panel Solutions

www.LaminatorsInc.com

800.523.2347

BOTTOM HORIZONTAL EDGE DETAIL

ADAPTA CLAD RS

DESIGN & INSTALLATION DETAILS

Date:
9/1/2026


Drawn By:
JJM

Detail Set:
AC-RS

Dwg. No.:
A-303

Rev:
00

* PANEL CLIPS REQUIRED ON LONG SIDES OF PANEL ONLY, TYP.

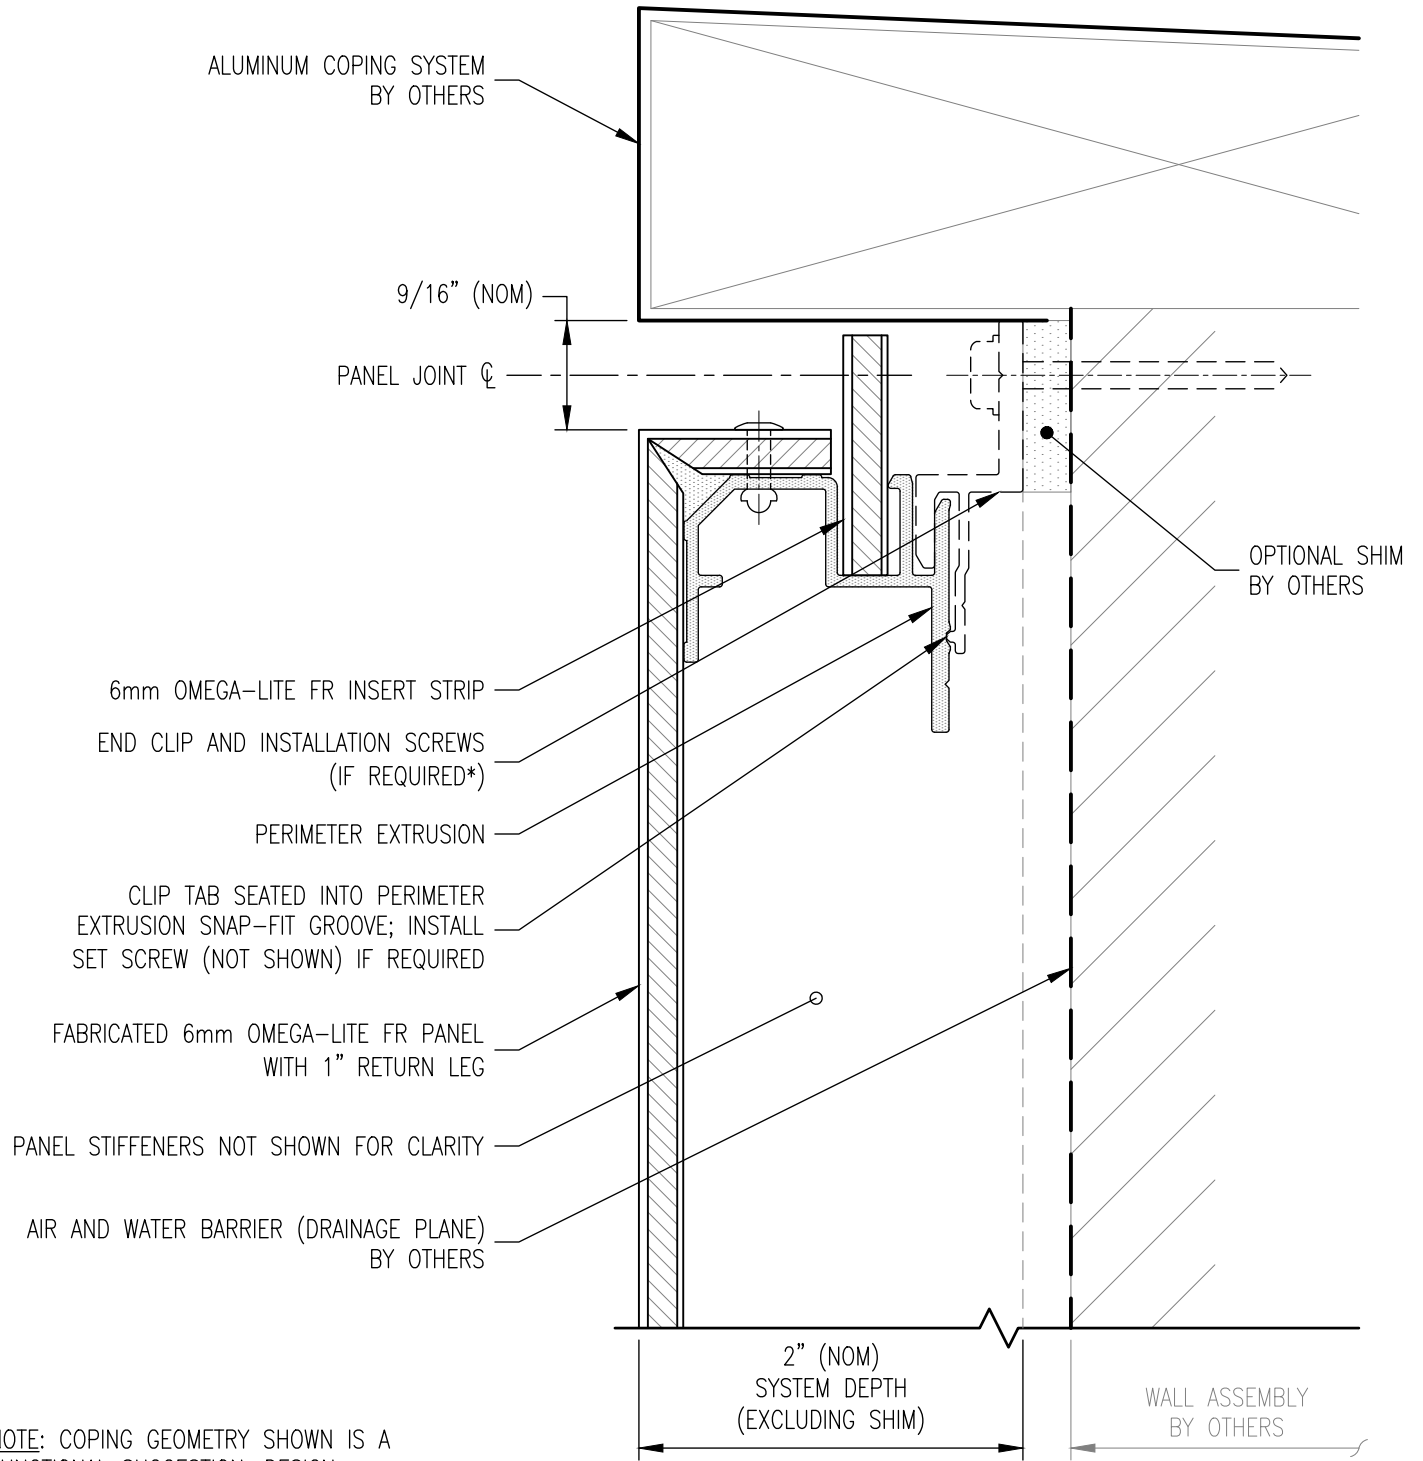

NOTE: COPING GEOMETRY SHOWN IS A
FUNCTIONAL SUGGESTION; DESIGN
PROFESSIONAL MAY MODIFY COPING TO
CREATE DESIRED AESTHETIC OR TO MEET
PROJECT-SPECIFIC CONDITIONS

A-304 SECTION



LAMINATORS
Composite Panel Solutions

www.LaminatorsInc.com

800.523.2347

TOP HORIZONTAL EDGE DETAIL

ADAPTACLAD RS

DESIGN & INSTALLATION DETAILS

Date:
9/1/2026


Drawn By:
JJM

Detail Set:
AC-RS

Dwg. No.:
A-304

Rev:
00

* PANEL CLIPS REQUIRED ON LONG SIDES OF PANEL ONLY, TYP.

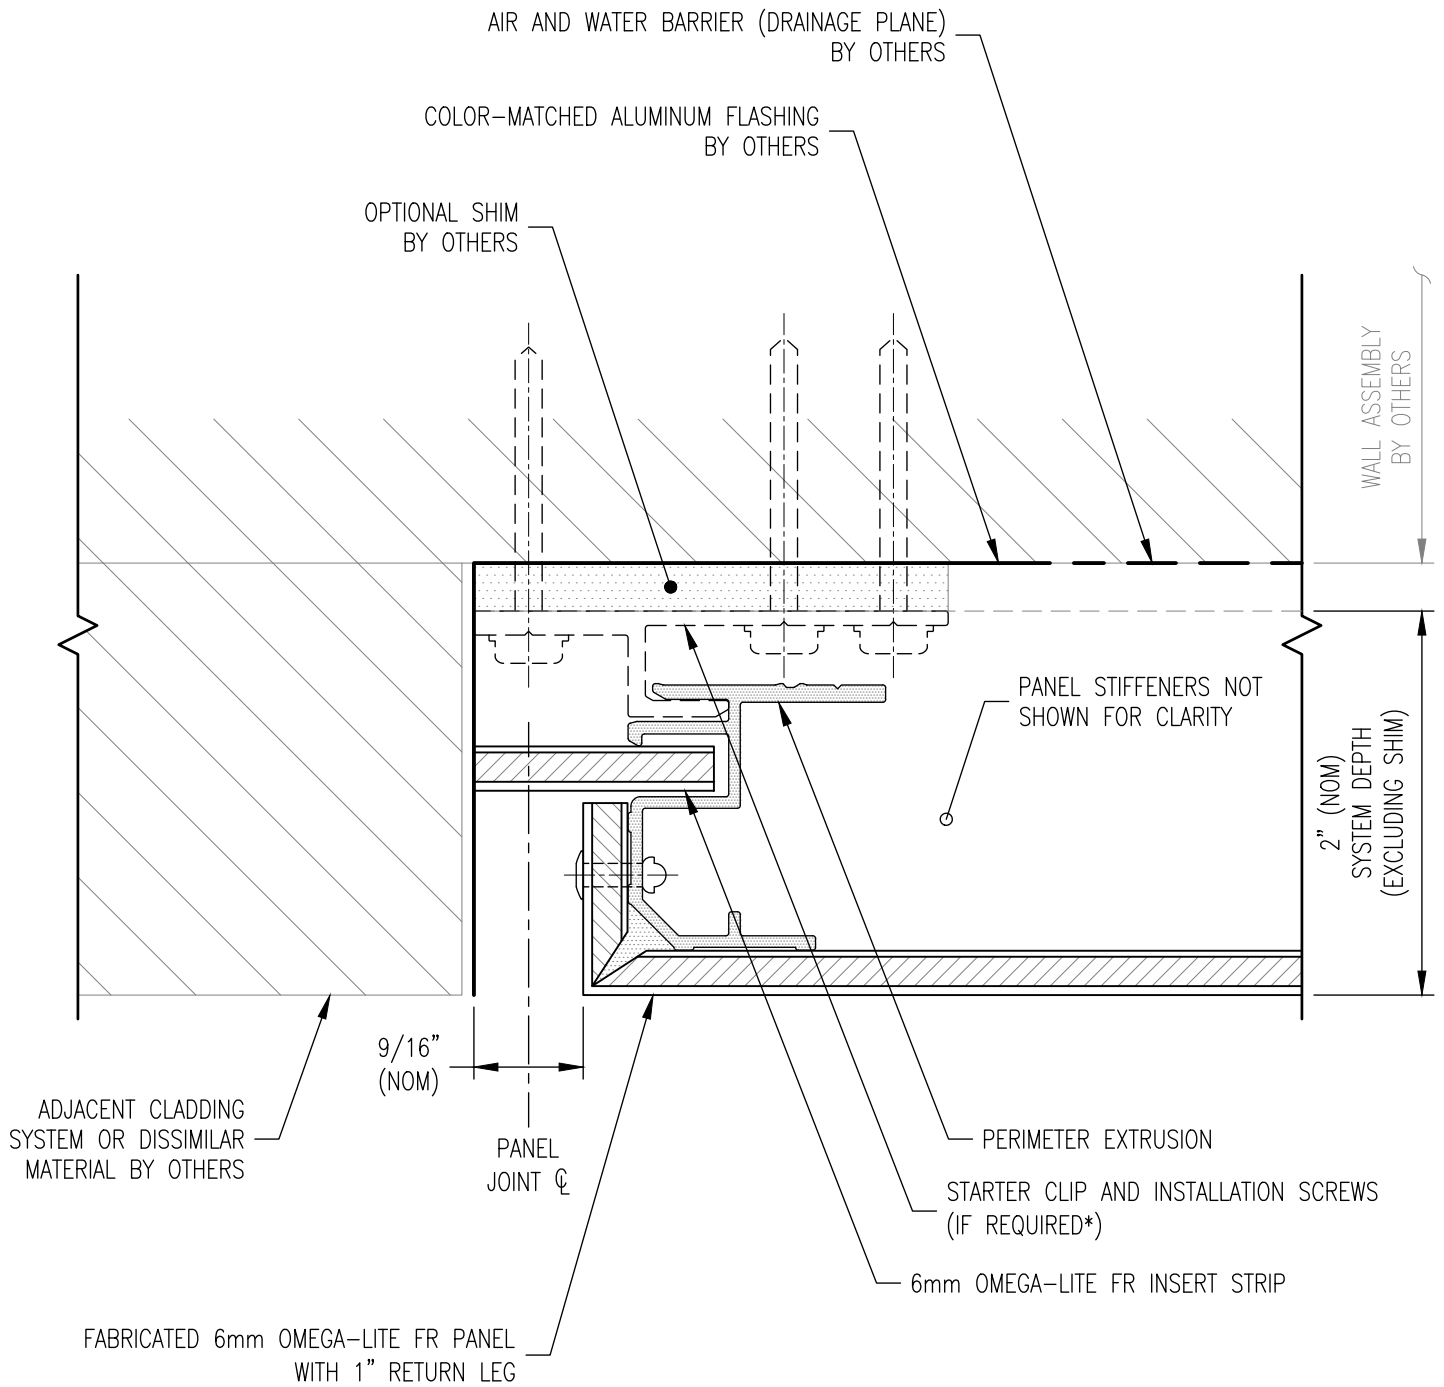

A-305 PLAN SECTION



LAMINATORS
Composite Panel Solutions

www.LaminatorsInc.com

800.523.2347

LEFT VERTICAL EDGE DETAIL

ADAPTACLAD RS

DESIGN & INSTALLATION DETAILS

Date:
9/1/2026


Drawn By:
JJM

Detail Set:
AC-RS

Dwg. No.:
A-305

Rev:
00

* PANEL CLIPS REQUIRED ON LONG SIDES OF PANEL ONLY, TYP.

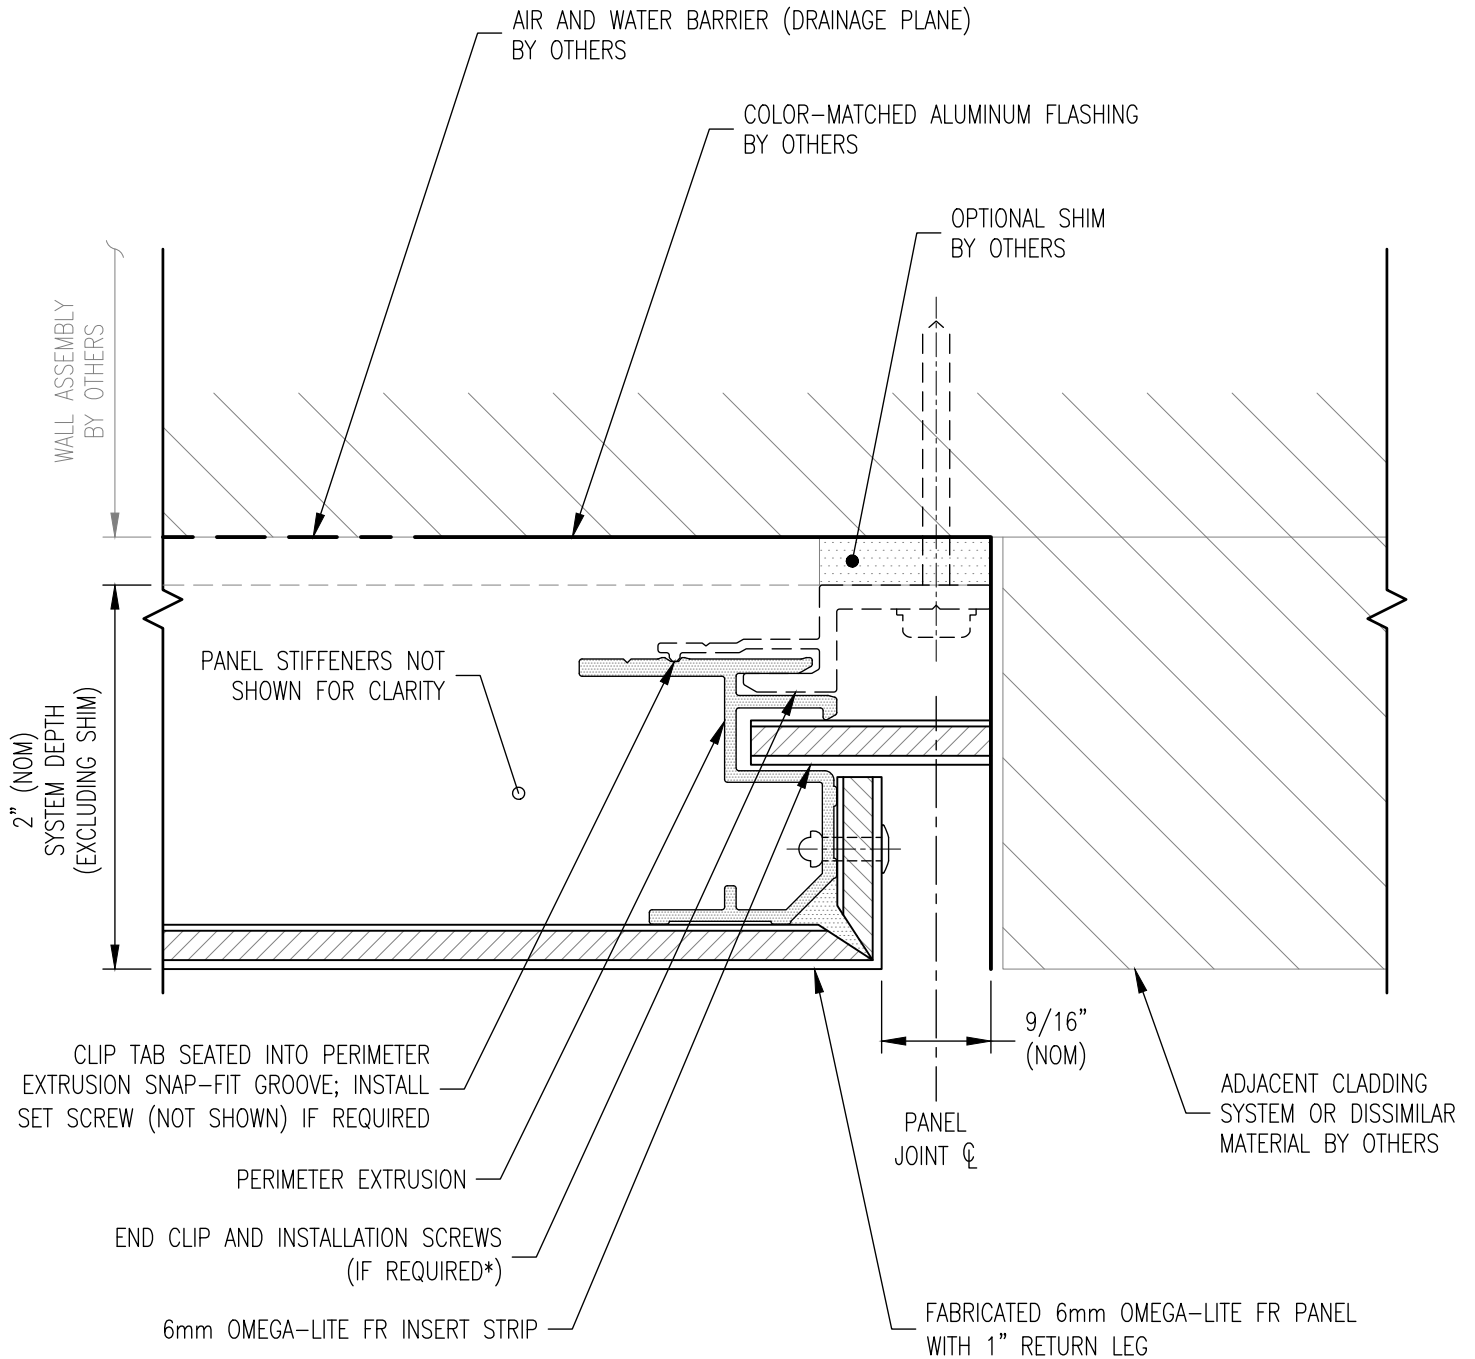

A-306 PLAN SECTION



LAMINATORS
Composite Panel Solutions

www.LaminatorsInc.com

800.523.2347

RIGHT VERTICAL EDGE DETAIL

ADAPTACLAD RS

DESIGN & INSTALLATION DETAILS


Date:
9/1/2026

Drawn By:
JJM

Detail Set:
AC-RS

Dwg. No.:
A-306

Rev:
00

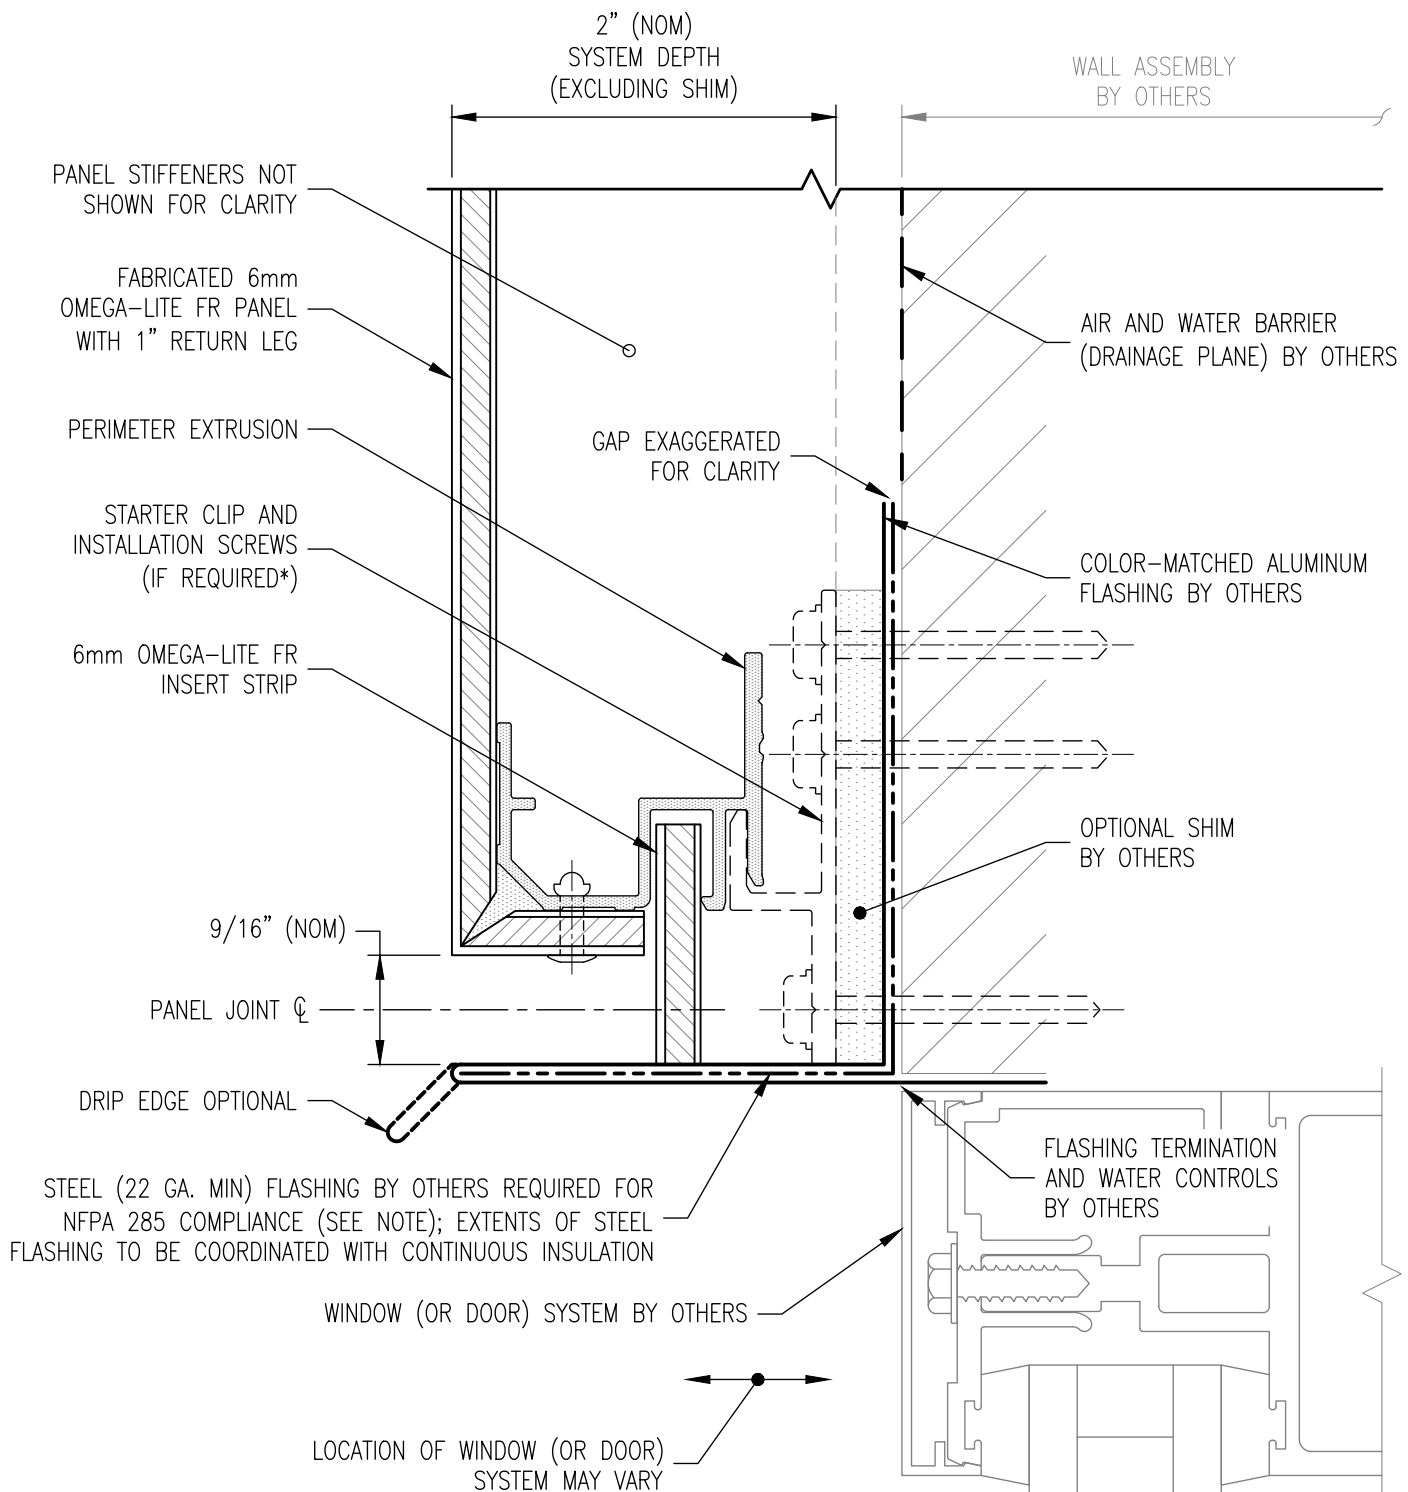

NOTE: ADDITIONAL STEEL FLASHING AT HEAD
CONDITIONS IS REQUIRED FOR SOME NFPA 285
COMPLIANT ASSEMBLIES CONTAINING CONTINUOUS
INSULATION PRODUCTS (REFER TO A-307.A &
A-307.B FOR EXAMPLES); CONTACT LAMINATORS
TECHNICAL SERVICES FOR MORE INFORMATION



LAMINATORS
Composite Panel Solutions

www.LaminatorsInc.com

800.523.2347

HEAD DETAIL AT OPENING

ADAPTACLAD RS

DESIGN & INSTALLATION DETAILS


Date:
9/1/2026

Drawn By:
JJM

Detail Set:
AC-RS

Dwg. No.:
A-307

Rev:
00

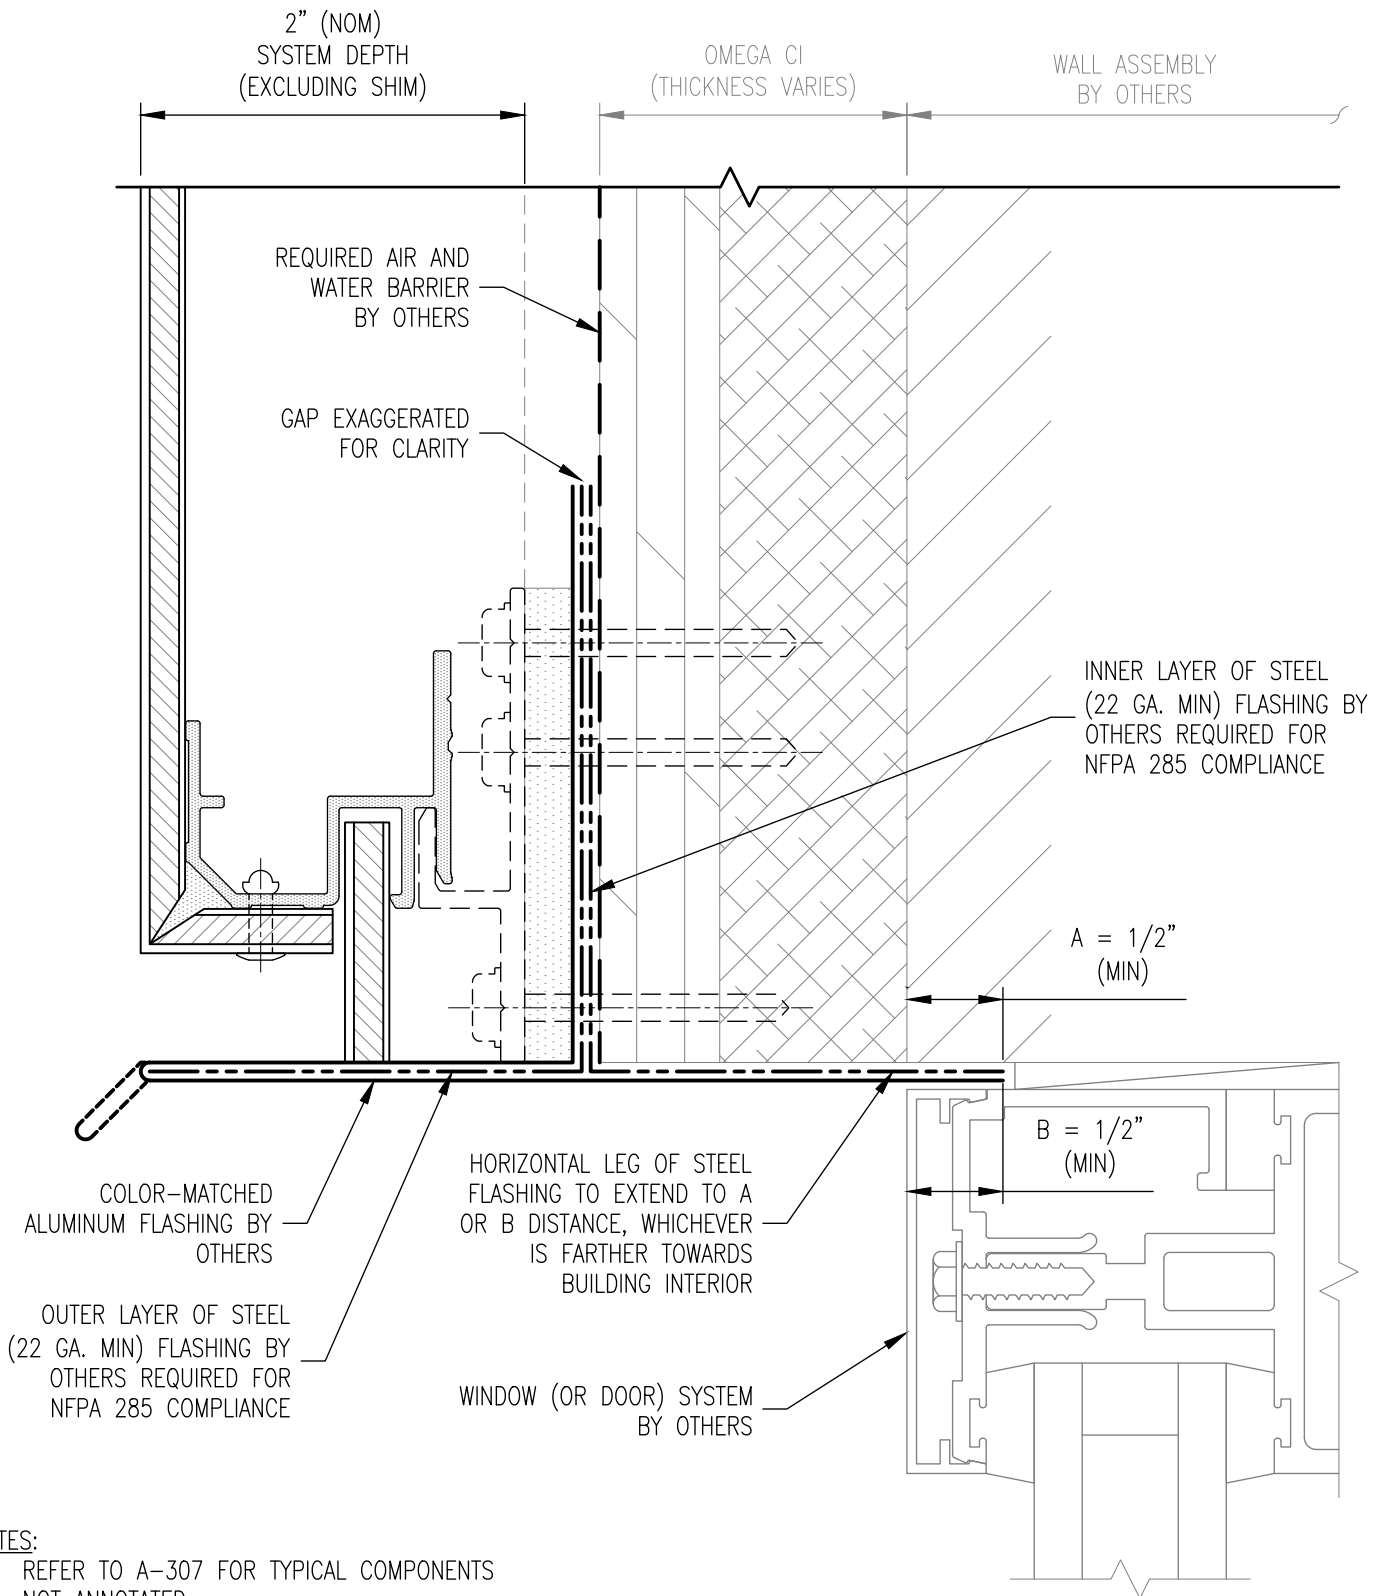

NOTES:

1. REFER TO A-307 FOR TYPICAL COMPONENTS NOT ANNOTATED
2. REFER TO EEV AVAILABLE FROM LAMINATORS FOR ALTERNATE COMPLIANT FRT PLYWOOD-FACED RIGID INSULATION PRODUCTS

SECTION
A-307.A



LAMINATORS
Composite Panel Solutions

www.LaminatorsInc.com

800.523.2347

HEAD DETAIL AT OPENING (OMEGA CI)

ADAPTACLAD RS

DESIGN & INSTALLATION DETAILS


Date:
9/1/2026

Drawn By:
JJM

Detail Set:
AC-RS

Dwg. No.:
A-307.A

Rev:
00

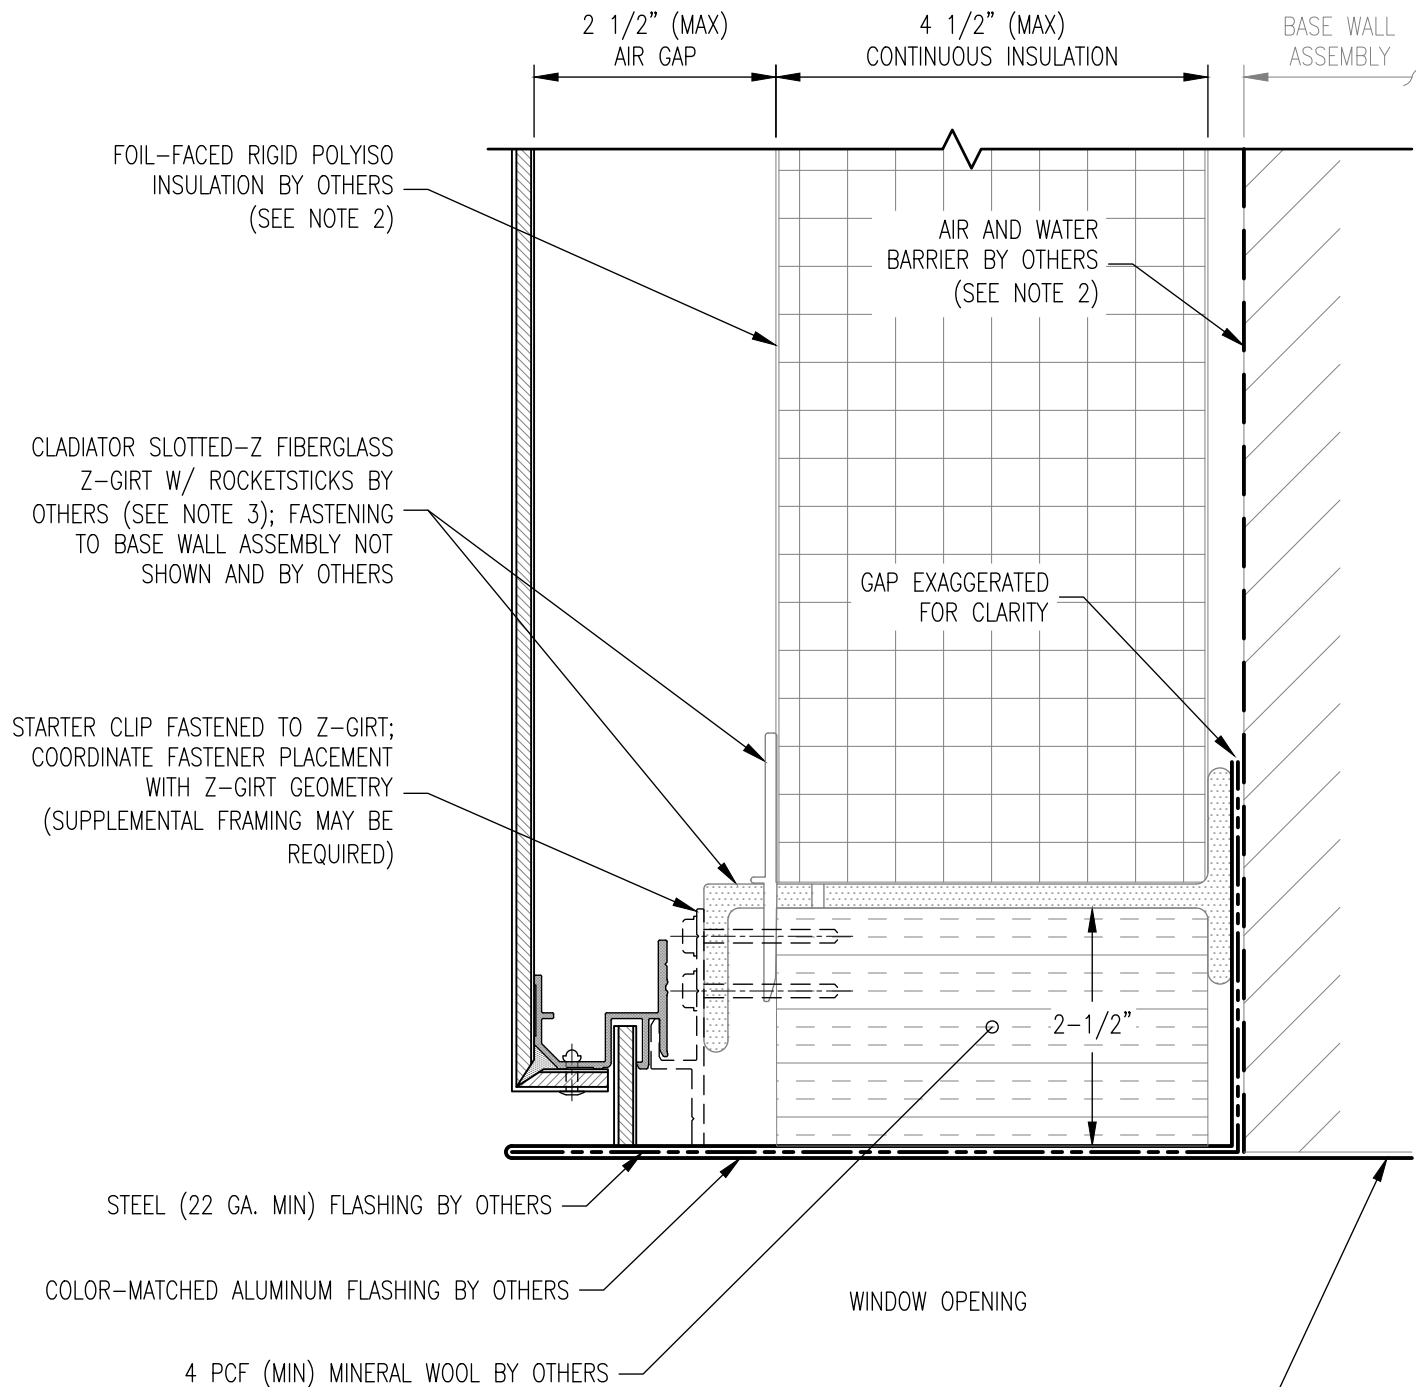

NOTES:

1. REFER TO A-307 FOR TYPICAL COMPONENTS NOT ANNOTATED
2. REFER TO EEV AVAILABLE FROM LAMINATORS FOR COMPLIANT INSULATION AND AWB/WRB PRODUCTS
3. LAMINATORS NFPA 285 TESTING PERFORMED WITH CLADIATOR SLOTTED-Z FIBERGLASS Z-GIRTS; EEV AVAILABLE FROM LAMINATORS PERMITS USE OF 18 GA. (MIN) CFSF IN LIEU OF CLADIATOR PRODUCTS

A-307.B SECTION



LAMINATORS
Composite Panel Solutions

www.LaminatorsInc.com

800.523.2347

HEAD DETAIL AT OPENING (RIGID INSULATION WITH Z-GIRTS)

ADAPTACLAD RS

DESIGN & INSTALLATION DETAILS

Date:
9/1/2026


Drawn By:
JJM

Detail Set:
AC-RS

Dwg. No.:
A-307.B

Rev:
00

* PANEL CLIPS REQUIRED ON LONG SIDES OF PANEL ONLY, TYP.

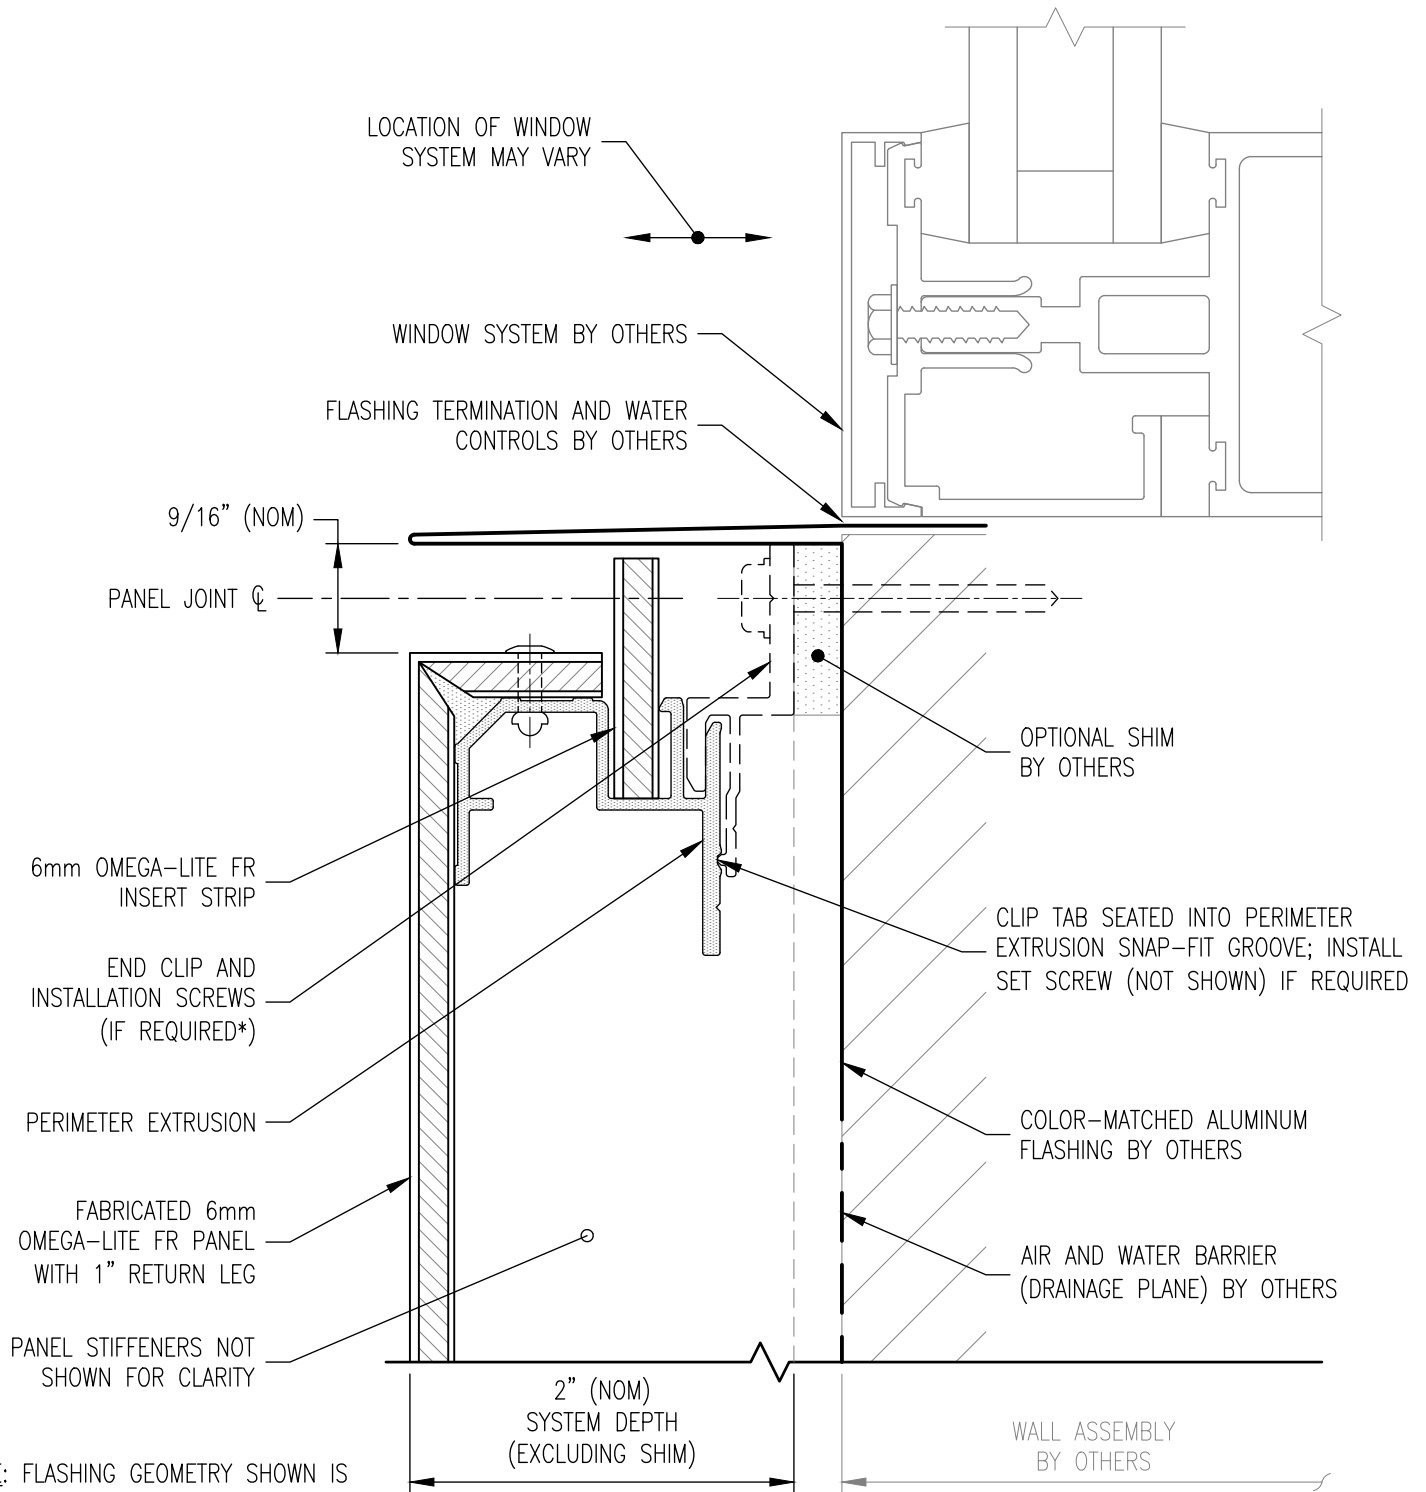

NOTE: FLASHING GEOMETRY SHOWN IS A FUNCTIONAL SUGGESTION; DESIGN PROFESSIONAL MAY MODIFY FLASHING TO CREATE DESIRED AESTHETIC OR TO MEET PROJECT-SPECIFIC CONDITIONS

A-308 SECTION



LAMINATORS
Composite Panel Solutions

www.LaminatorsInc.com

800.523.2347

SILL DETAIL AT OPENING

ADAPTACLAD RS

DESIGN & INSTALLATION DETAILS

Date:
9/1/2026


Drawn By:
JJM

Detail Set:
AC-RS

Dwg. No.:
A-308

Rev:
00

* PANEL CLIPS REQUIRED ON LONG SIDES OF PANEL ONLY, TYP.

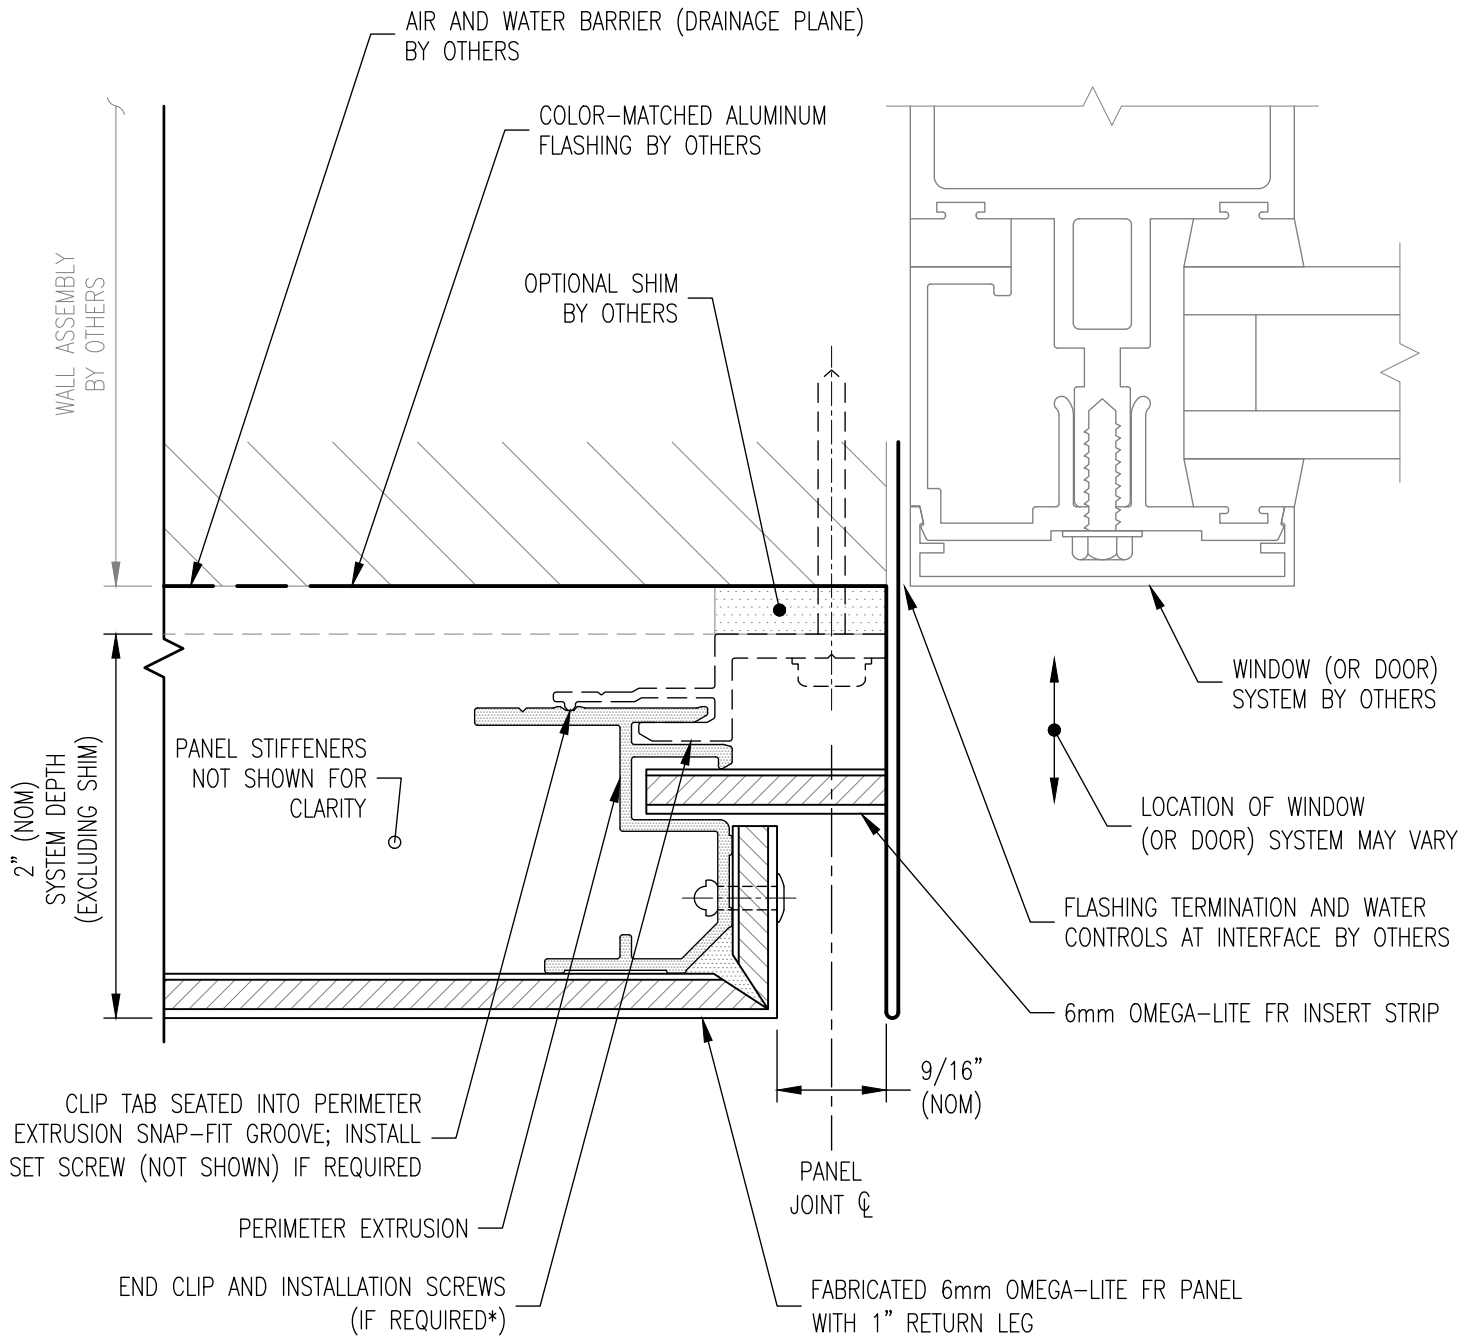

NOTE: STEEL FLASHING AT JAMB CONDITIONS IS REQUIRED FOR SOME NFPA 285 COMPLIANT ASSEMBLIES CONTAINING CONTINUOUS INSULATION PRODUCTS (REFER TO A-309.A & A-309.B FOR EXAMPLES); CONTACT LAMINATORS TECHNICAL SERVICES FOR MORE INFORMATION

A-309 PLAN SECTION

NOTE: FLASHING GEOMETRY SHOWN IS A FUNCTIONAL SUGGESTION; DESIGN PROFESSIONAL MAY MODIFY FLASHING TO CREATE DESIRED AESTHETIC OR TO MEET PROJECT-SPECIFIC CONDITIONS



LAMINATORS
Composite Panel Solutions

www.LaminatorsInc.com

800.523.2347


LEFT JAMB DETAIL AT OPENING

ADAPTACLAD RS

DESIGN & INSTALLATION DETAILS

Date: 9/1/2026	Drawn By: JJM	Detail Set: AC-RS	Dwg. No.: A-309	Rev: 00
-------------------	------------------	----------------------	--------------------	------------

LEFT JAMB CONDITION SHOWN;
RIGHT JAMB CONDITION SIMILAR

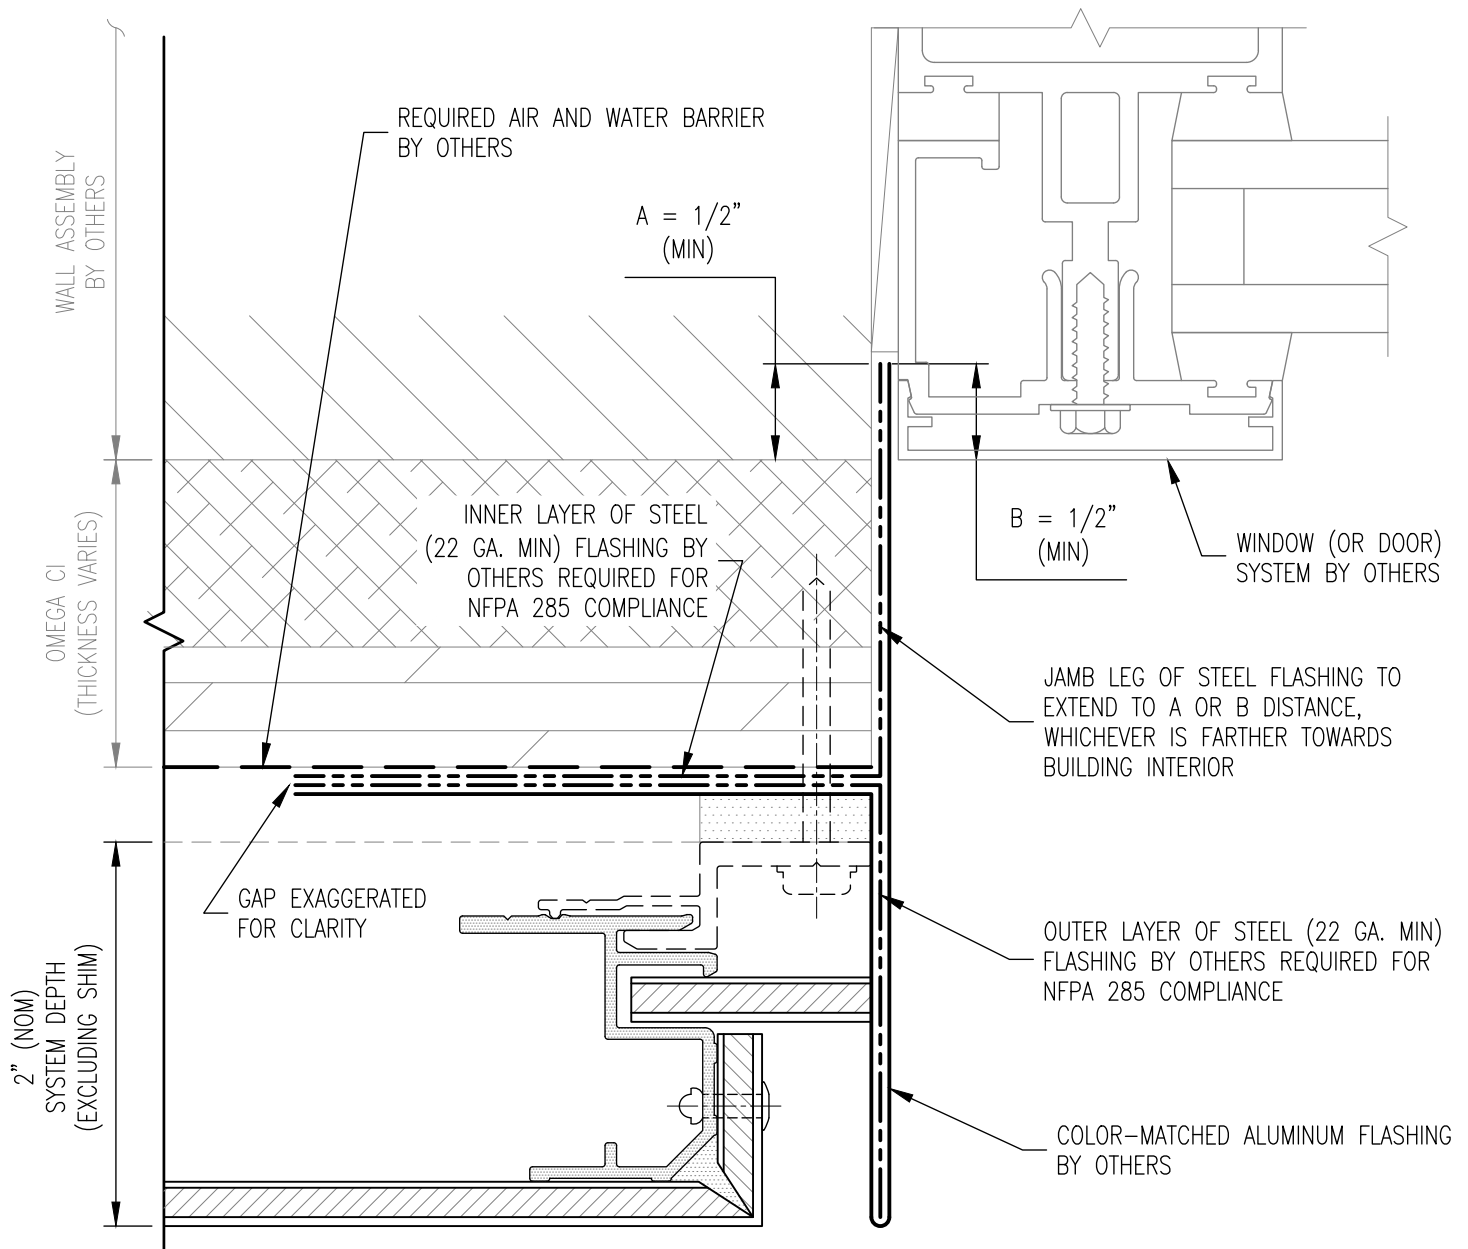

NOTES:

1. REFER TO A-309 FOR TYPICAL COMPONENTS NOT ANNOTATED
2. REFER TO EEV AVAILABLE FROM LAMINATORS FOR ALTERNATE COMPLIANT FRT PLYWOOD-FACED RIGID INSULATION PRODUCTS

A-309.A

PLAN SECTION



LAMINATORS
Composite Panel Solutions

www.LaminatorsInc.com

800.523.2347

LEFT JAMB DETAIL AT OPENING (OMEGA CI)

ADAPTACLAD RS

DESIGN & INSTALLATION DETAILS

Date:
9/1/2026


Drawn By:
JJM

Detail Set:
AC-RS

Dwg. No.:
A-309.A

Rev:
00

LEFT JAMB CONDITION SHOWN;
RIGHT JAMB CONDITION SIMILAR

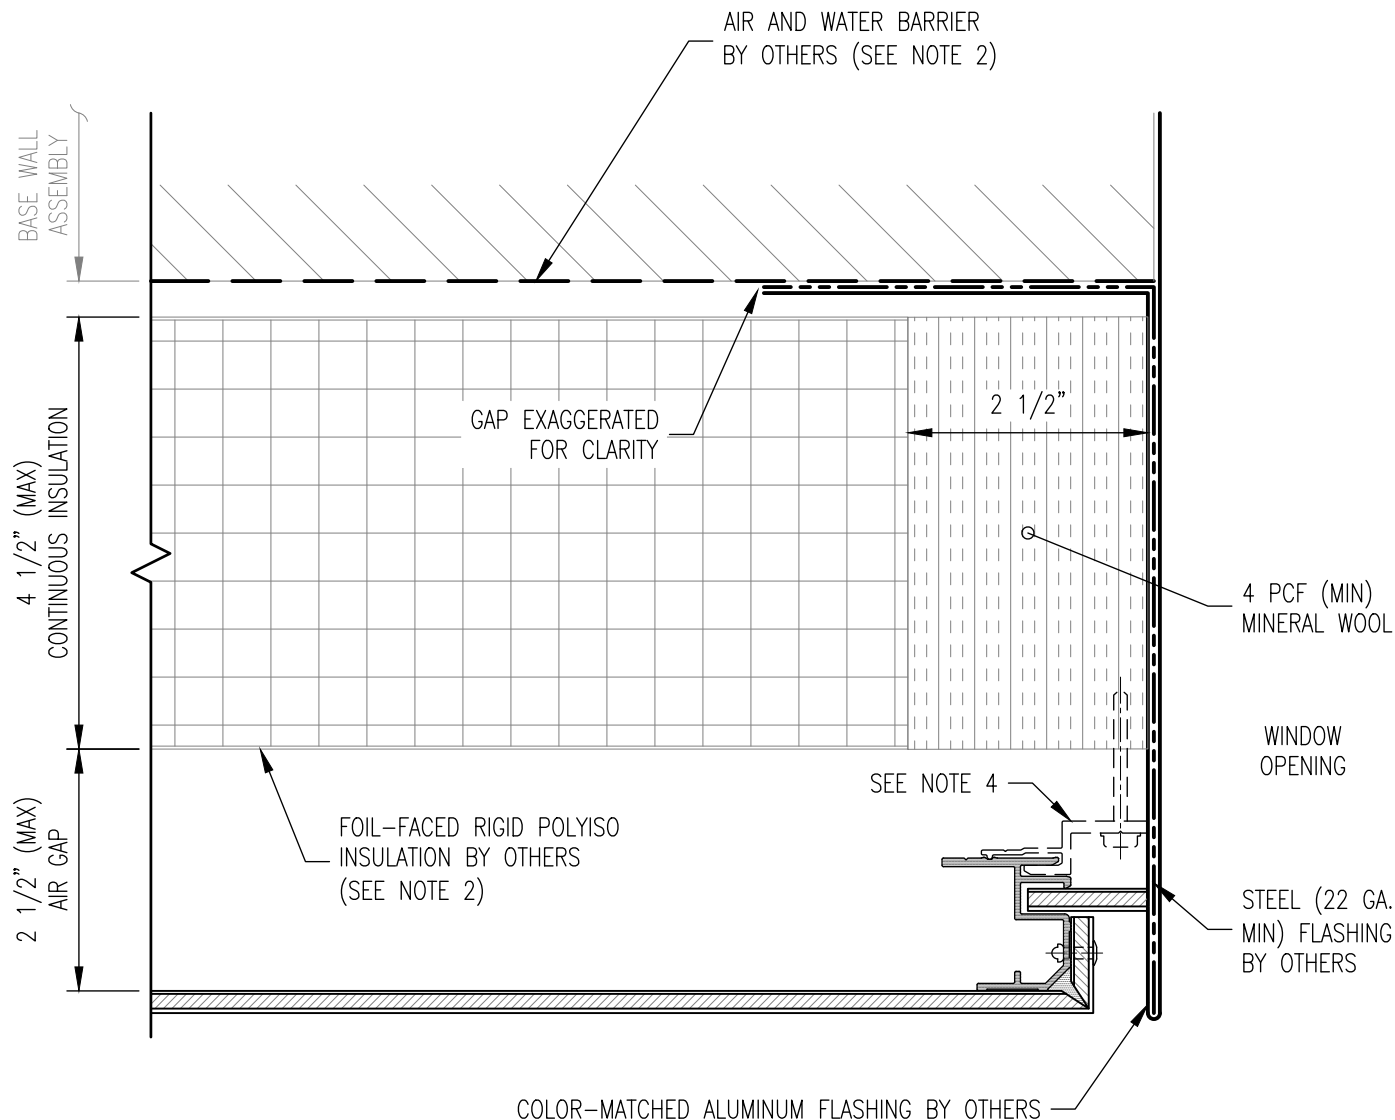

A-309.B PLAN SECTION

NOTES:

1. REFER TO A-309 FOR TYPICAL COMPONENTS NOT ANNOTATED
2. REFER TO EEV AVAILABLE FROM LAMINATORS FOR COMPLIANT INSULATION AND AWB/WRB PRODUCTS
3. LAMINATORS NFPA 285 TESTING PERFORMED WITH CLADIATOR SLOTTED-Z FIBERGLASS Z-GIRTS; EEV AVAILABLE FROM LAMINATORS PERMITS USE OF 18 GA. (MIN) CFSF IN LIEU OF CLADIATOR PRODUCTS
4. DETAIL ASSUMES HORIZONTAL Z-GIRT ORIENTATION WITH PANEL CLIPS LOCATED ON LONG SIDES OF PANEL ONLY; PROVIDE SUPPLEMENTAL FRAMING AS REQUIRED TO SUPPORT CLIP LOCATIONS



LAMINATORS
Composite Panel Solutions

www.LaminatorsInc.com

800.523.2347

LEFT JAMB DETAIL AT OPENING (RIGID INSULATION WITH Z-GIRTS)

ADAPTACLAD RS

DESIGN & INSTALLATION DETAILS

Date:
9/1/2026


Drawn By:
JJM

Detail Set:
AC-RS

Dwg. No.:
A-309.B

Rev:
00

* PANEL CLIPS REQUIRED ON LONG SIDES OF PANEL ONLY, TYP.

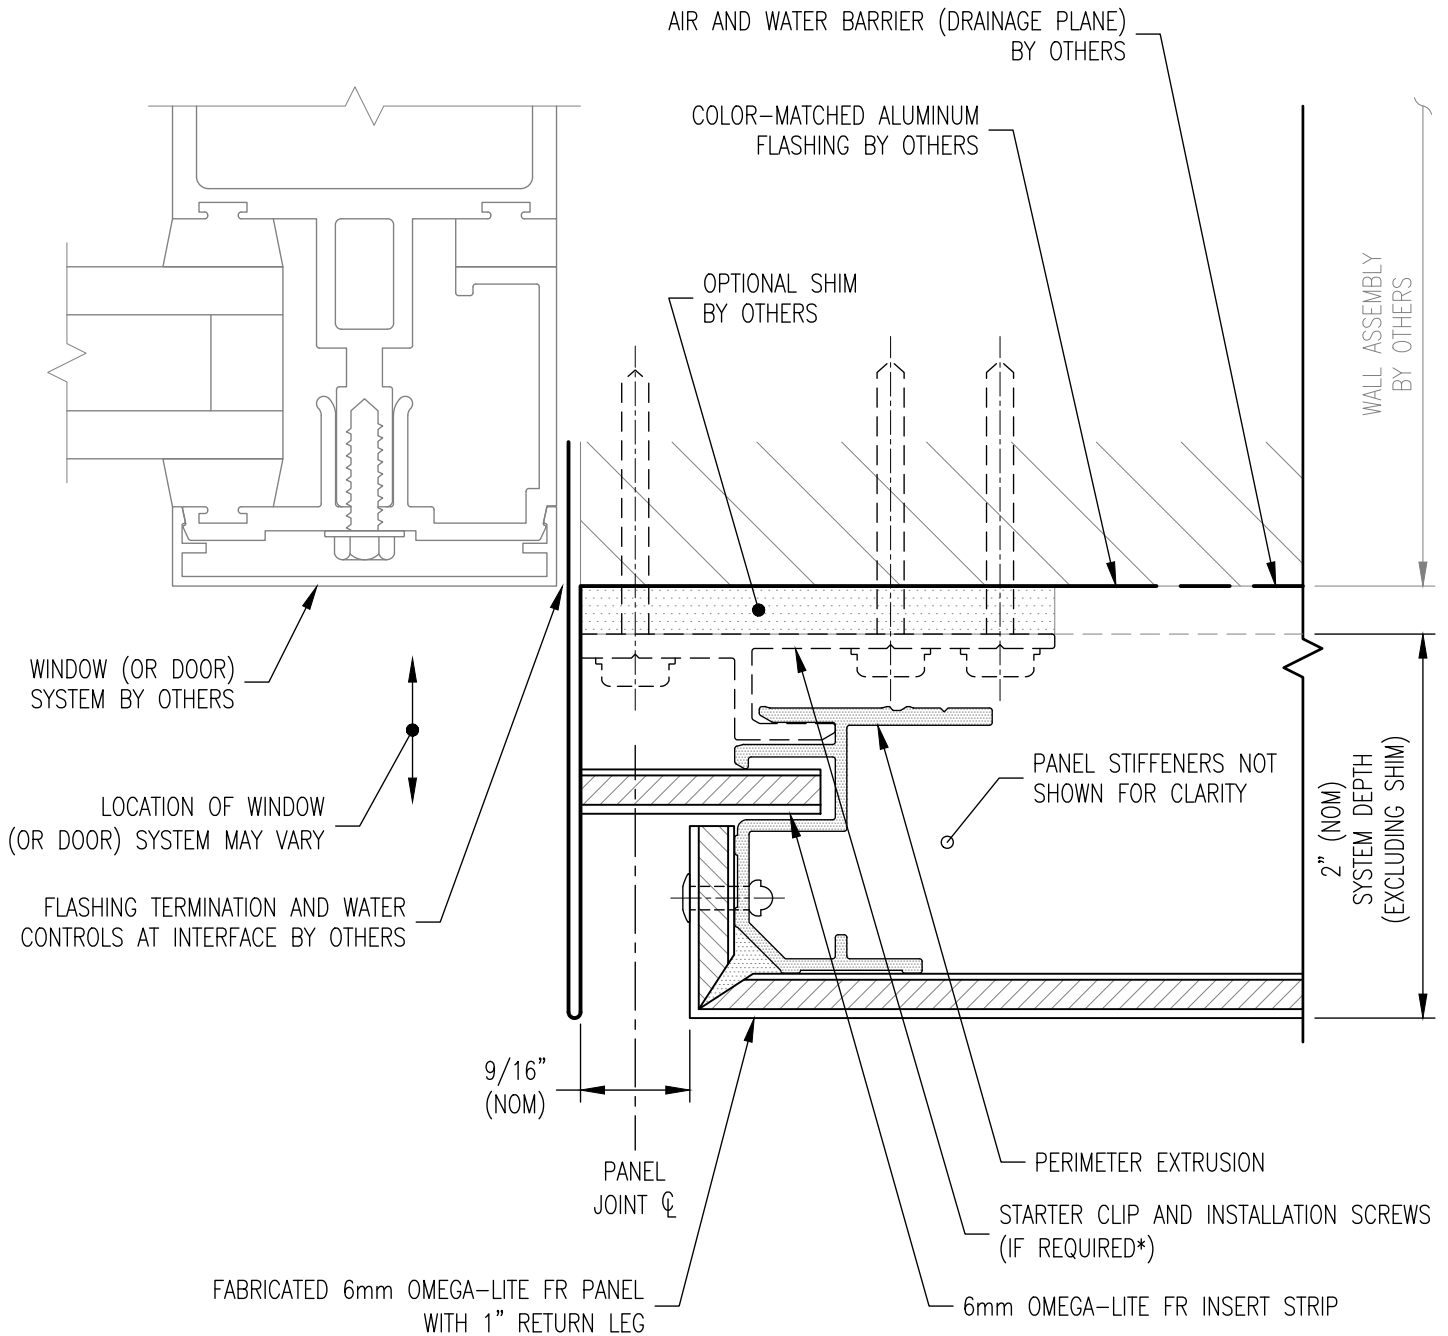

NOTE: STEEL FLASHING AT JAMB CONDITIONS IS REQUIRED FOR SOME NFPA 285 COMPLIANT ASSEMBLIES CONTAINING CONTINUOUS INSULATION PRODUCTS (REFER TO A-309.A & A-309.B FOR EXAMPLES); CONTACT LAMINATORS TECHNICAL SERVICES FOR MORE INFORMATION

A-310 PLAN SECTION

NOTE: FLASHING GEOMETRY SHOWN IS A FUNCTIONAL SUGGESTION; DESIGN PROFESSIONAL MAY MODIFY FLASHING TO CREATE DESIRED AESTHETIC OR TO MEET PROJECT-SPECIFIC CONDITIONS



LAMINATORS
Composite Panel Solutions

www.LaminatorsInc.com

800.523.2347

RIGHT JAMB DETAIL AT OPENING

ADAPTACLAD RS

DESIGN & INSTALLATION DETAILS

Date:
9/1/2026


Drawn By:
JJM

Detail Set:
AC-RS

Dwg. No.:
A-310

Rev:
00

* PANEL CLIPS REQUIRED ON LONG SIDES OF PANEL ONLY, TYP.

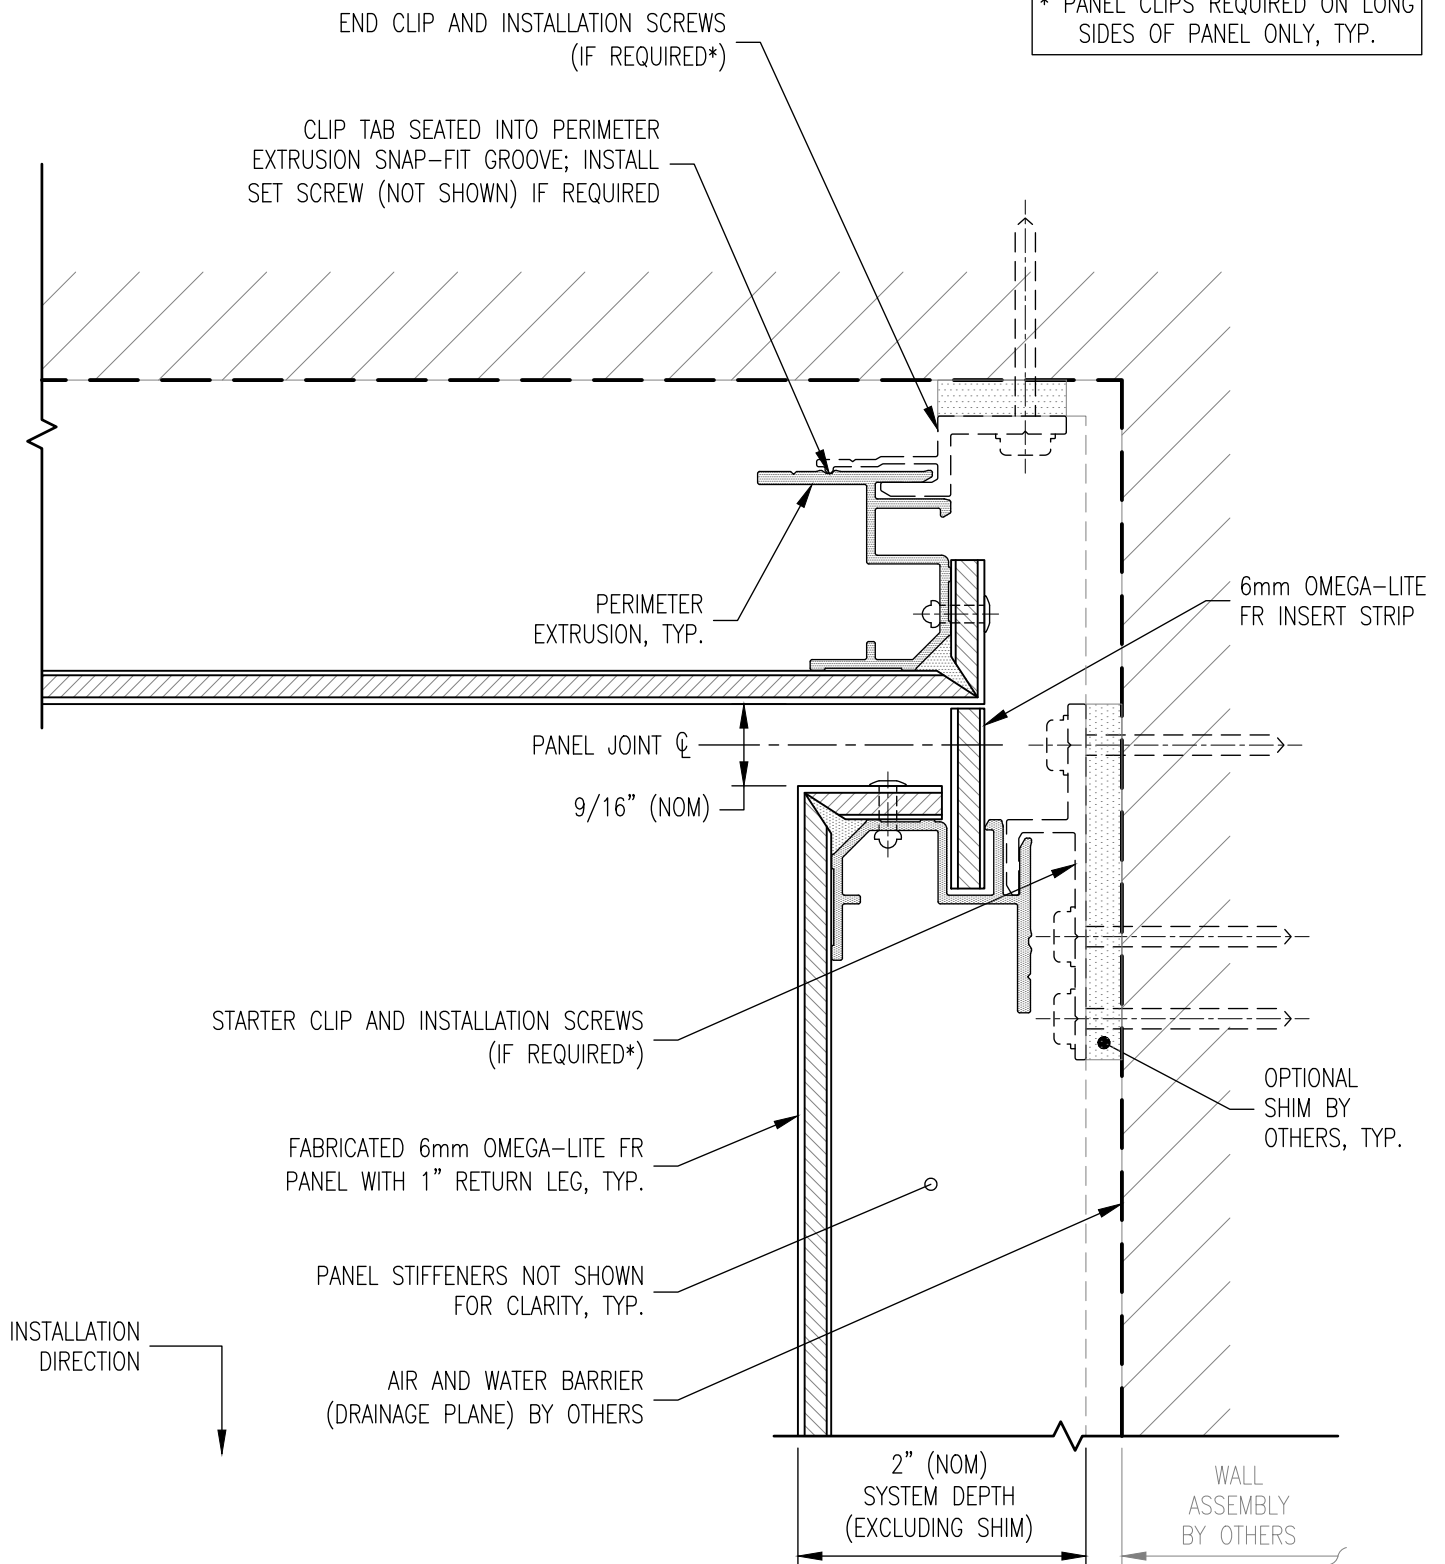

A-311 PLAN SECTION



LAMINATORS
Composite Panel Solutions

www.LaminatorsInc.com

800.523.2347

INSIDE CORNER DETAIL

ADAPTACLAD RS

DESIGN & INSTALLATION DETAILS


Date:
9/1/2026

Drawn By:
JJM

Detail Set:
AC-RS

Dwg. No.:
A-311

Rev:
00

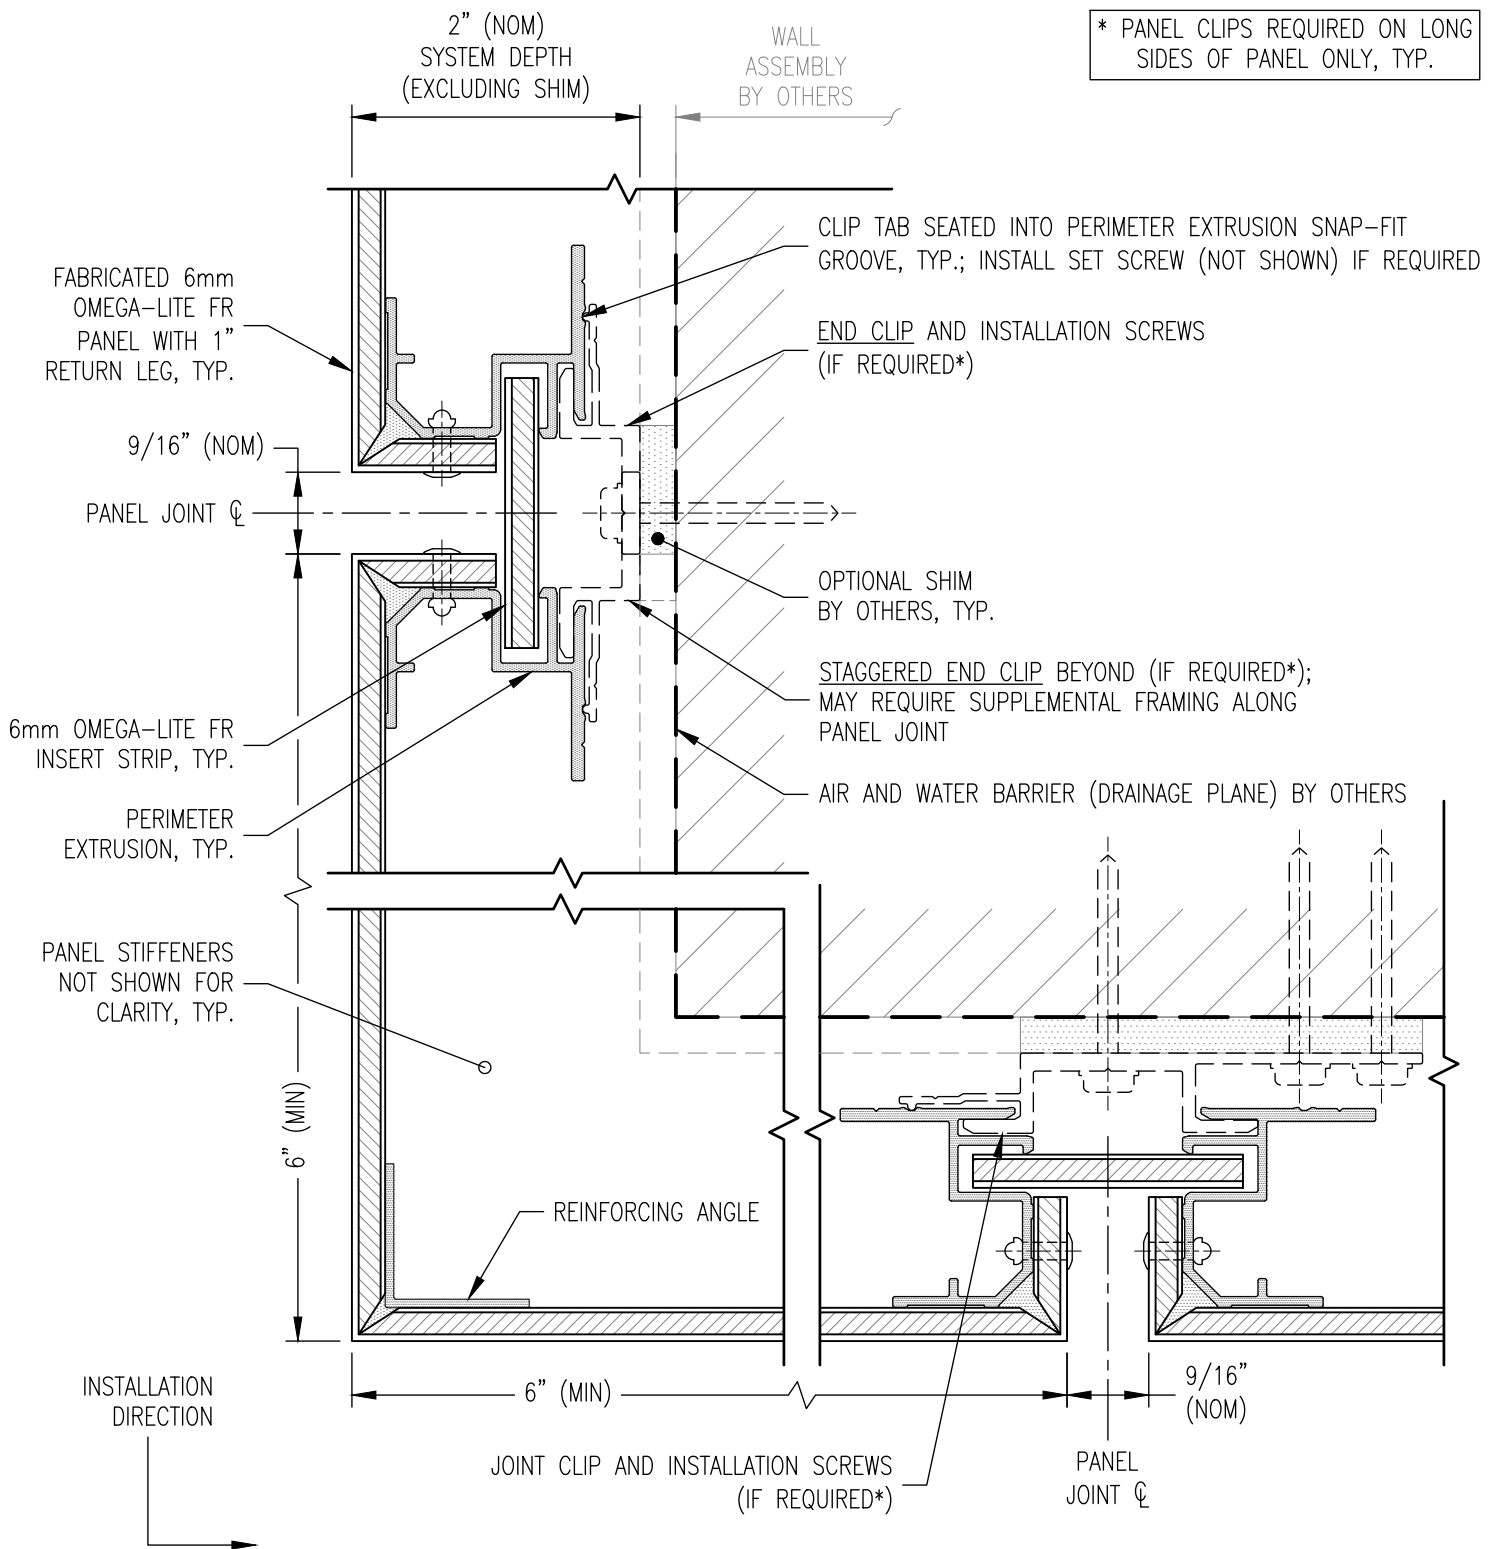

LAMINATORS
Composite Panel Solutions

www.LaminatorsInc.com

800.523.2347

OUTSIDE CORNER DETAIL

ADAPTACLAD RS

DESIGN & INSTALLATION DETAILS


Date:
9/1/2026

Drawn By:
JJM

Detail Set:
AC-RS

Dwg. No.:
A-312

Rev:
00

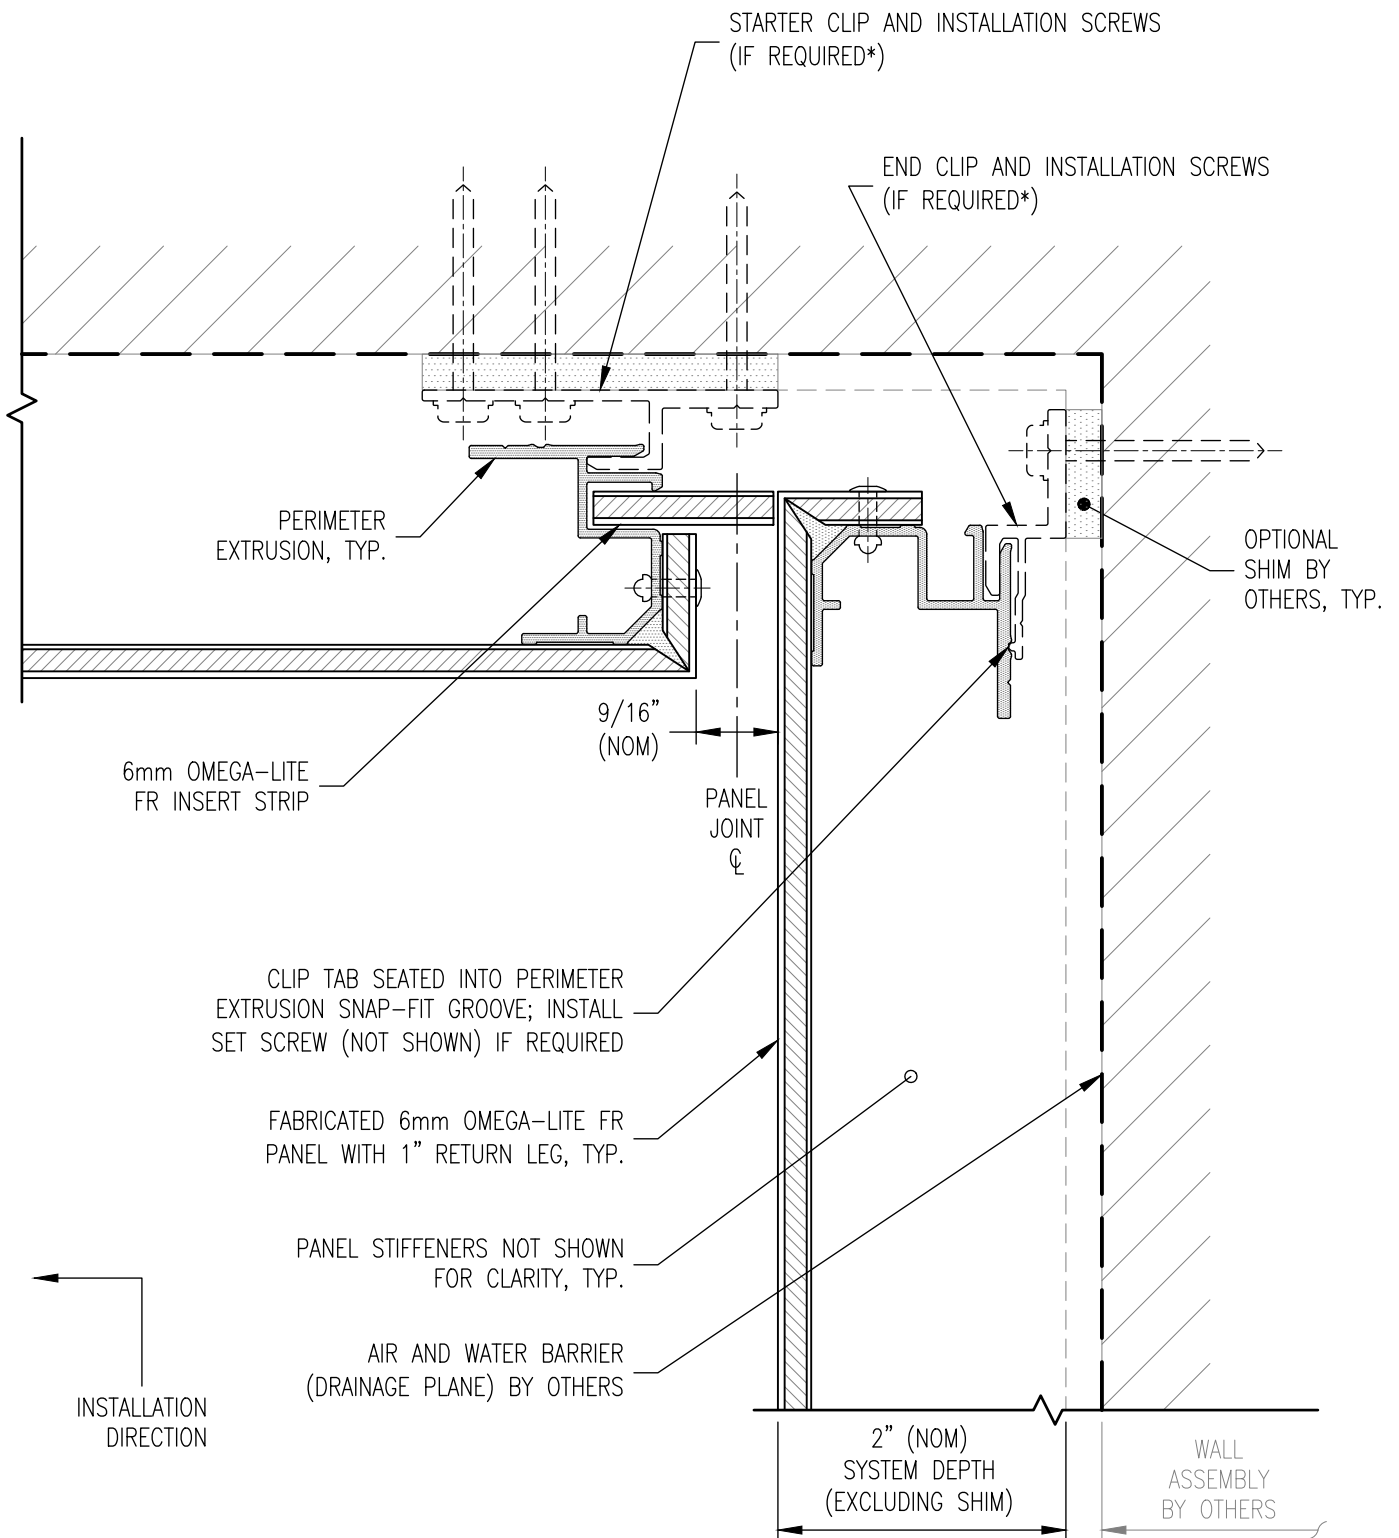

* PANEL CLIPS REQUIRED ON LONG SIDES OF PANEL ONLY, TYP.

A-313

PLAN SECTION



LAMINATORS
Composite Panel Solutions

www.LaminatorsInc.com

800.523.2347

SOFFIT-TO-WALL TRANSITION DETAIL

ADAPTACLAD RS

DESIGN & INSTALLATION DETAILS


Date:
9/1/2026

Drawn By:
JJM

Detail Set:
AC-RS

Dwg. No.:
A-313

Rev:
00

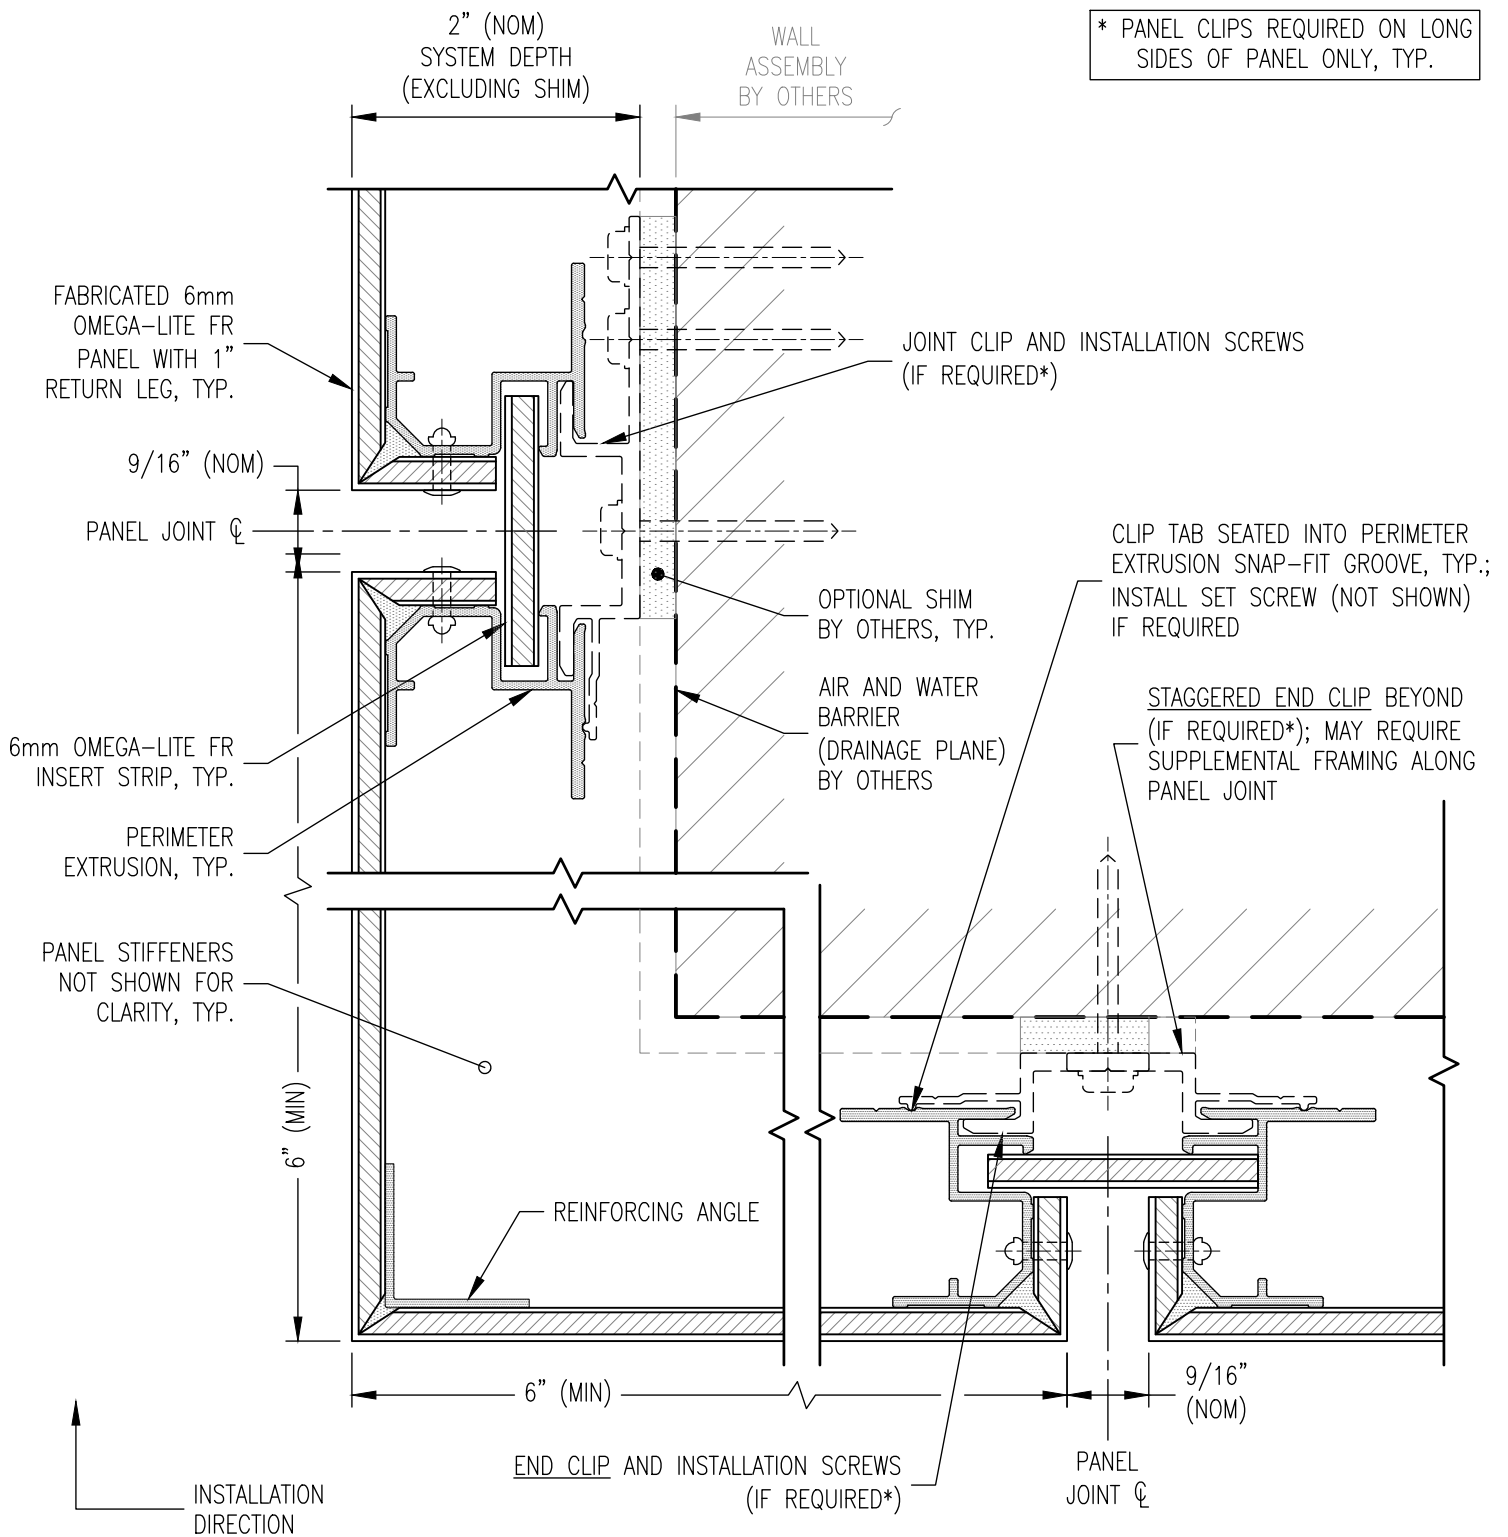

NOTE: FASCIA-TO-SOFFIT TRANSITIONS REQUIRE STAGGERED END CLIPS AND SPECIFIC ORIENTATION OF JOINT CLIPS TO SECURE PANEL; REFER TO A-405 FOR MORE INFORMATION

A-314 SECTION



LAMINATORS
Composite Panel Solutions

www.LaminatorsInc.com

800.523.2347

FASCIA-TO-SOFFIT TRANSITION DETAIL

ADAPTACLAD RS

DESIGN & INSTALLATION DETAILS


Date:
9/1/2026

Drawn By:
JJM

Detail Set:
AC-RS

Dwg. No.:
A-314

Rev:
00

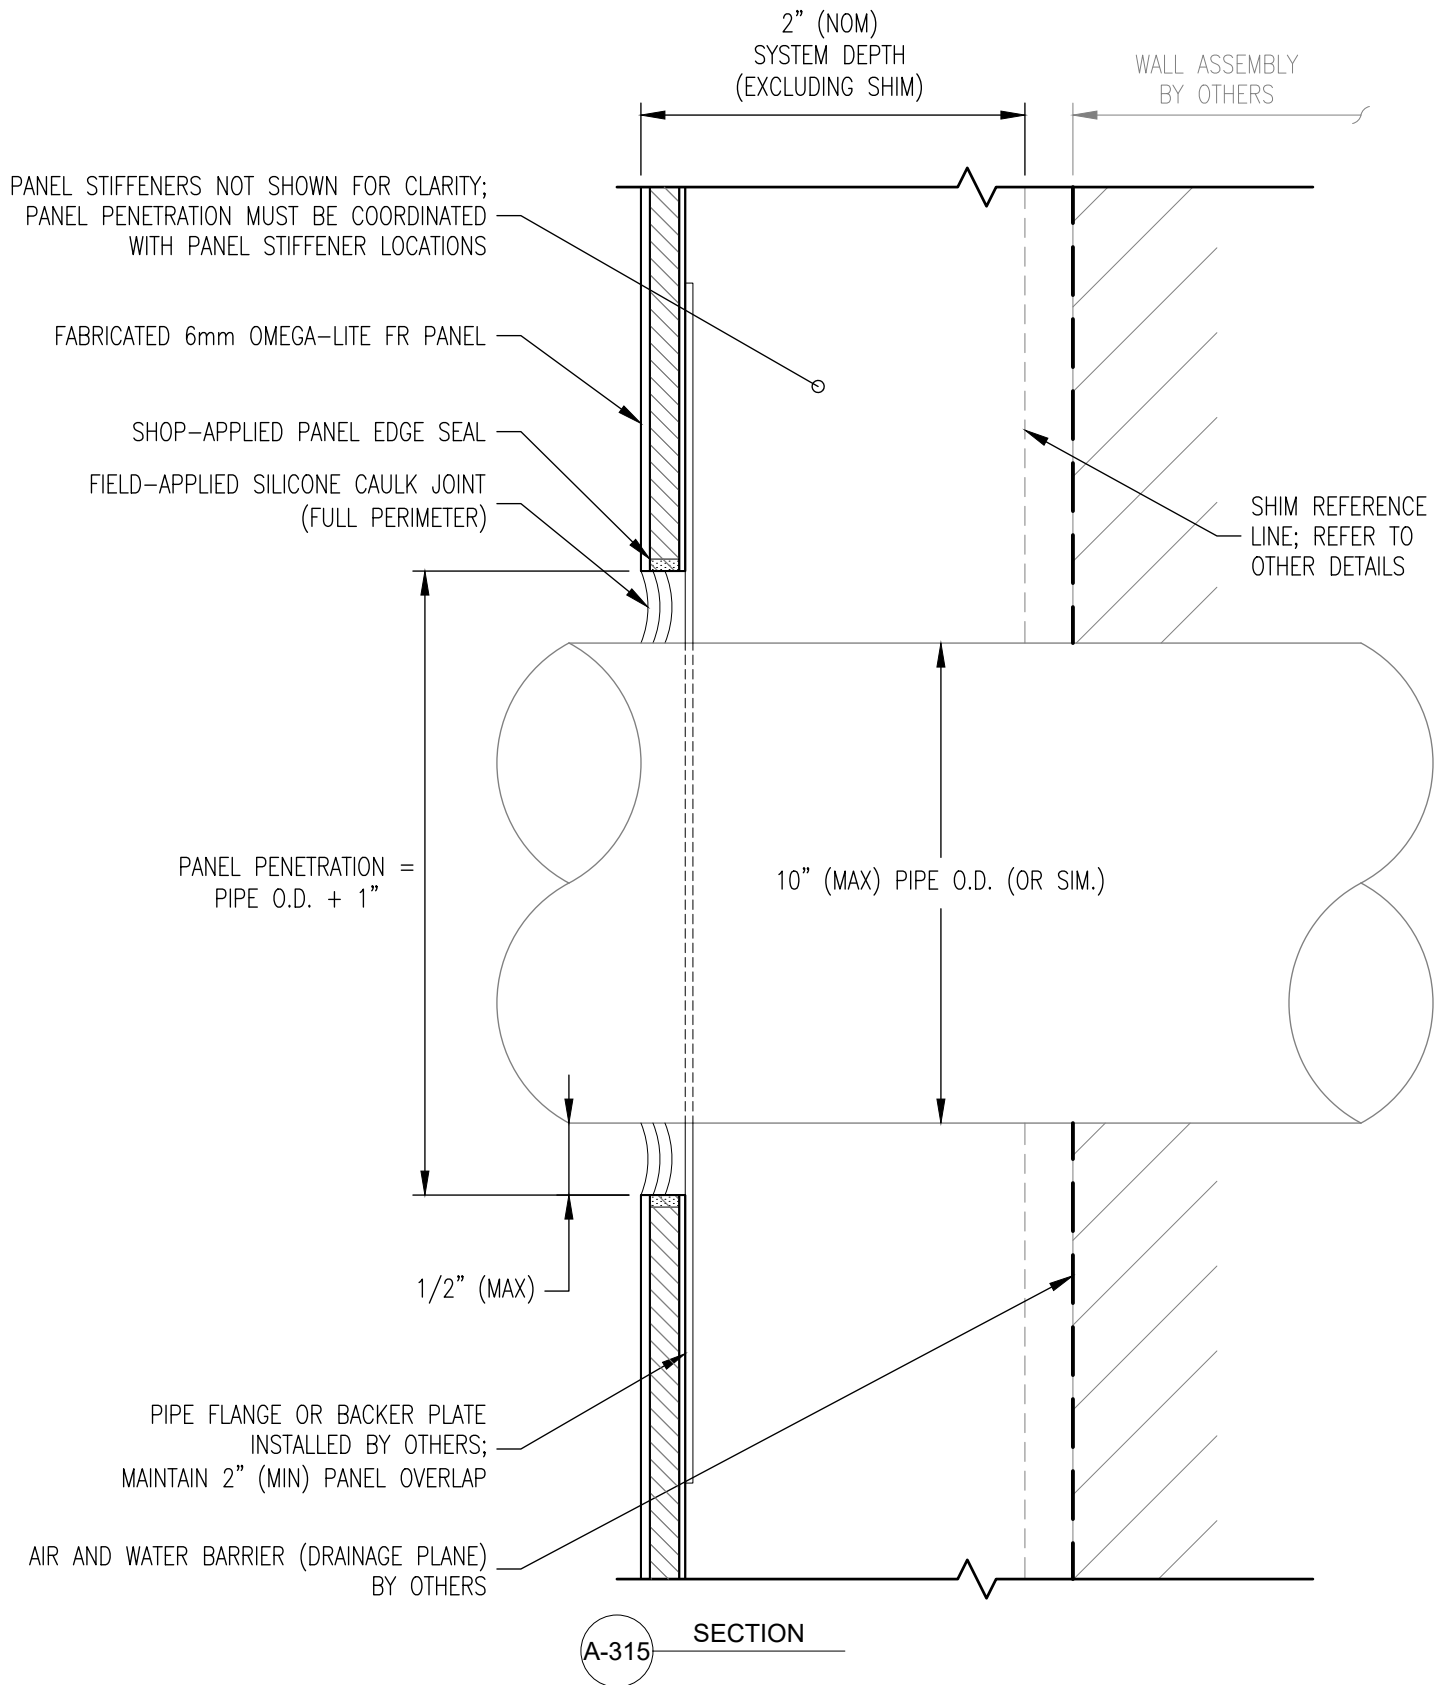

LAMINATORS
Composite Panel Solutions

www.LaminatorsInc.com

800.523.2347

PANEL PENETRATION DETAIL

ADAPTACLAD RS

DESIGN & INSTALLATION DETAILS


Date:
9/1/2026

Drawn By:
JJM

Detail Set:
AC-RS

Dwg. No.:
A-315

Rev:
00

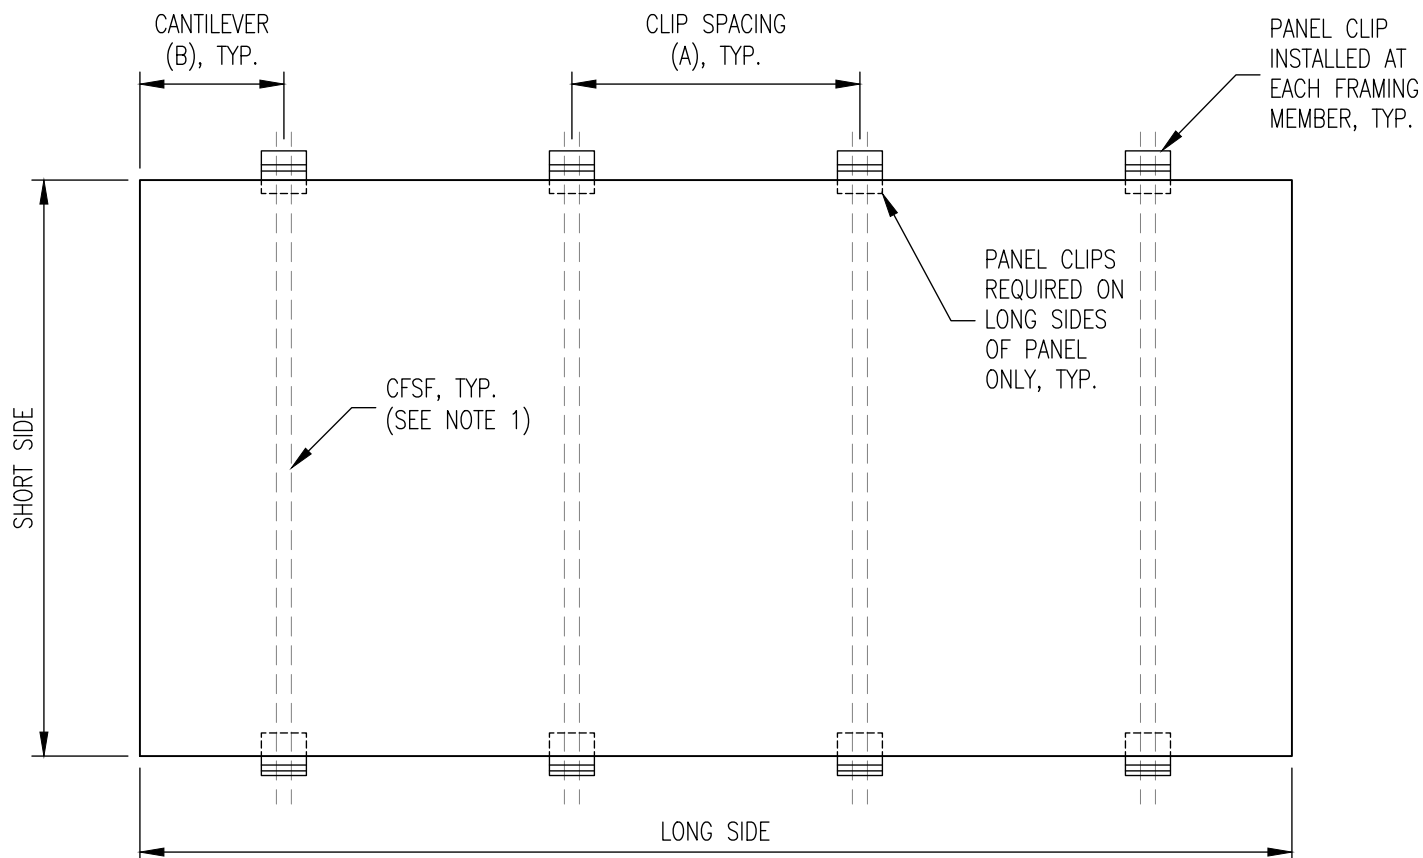

A-401 TYPICAL LANDSCAPE PANEL
PERPENDICULAR FRAMING

THIS DETAIL ALSO APPLIES TO PORTRAIT PANELS OVER HORIZONTAL (PERP.) FRAMING

NOTES:

1. PANEL CLIP REFERS TO JOINT, STARTER, OR END CLIPS AS REQUIRED FOR INSTALLATION
2. PANEL CLIP REQUIREMENTS:
 - 4 PANEL CLIPS (MIN) PER PANEL; PROVIDE SUPPLEMENTAL FRAMING AS REQUIRED
 - REFER TO A-106 FOR CONDITIONS WITH ROTATED PANEL STIFFENERS
 - REFER TO A-406 FOR SET SCREW REQUIREMENTS
3. REFER TO A-501 FOR REQUIRED NUMBER OF INSTALLATION SCREWS PER CLIP

**TABLE 401: CLIP SPACING BY WIND LOAD
(PERPENDICULAR FRAMING)**

STRUCTURAL CAPACITY (PSF) [ASD]	MAXIMUM CLIP SPACING (A) (INCHES)	MAXIMUM CANTILEVER (B) (INCHES)
40	24	23
60	16	16

NOTE: REFER TO A-404 & A-405 FOR CONDITIONS WITH SPECIAL CLIP REQUIREMENTS



LAMINATORS
Composite Panel Solutions

www.LaminatorsInc.com

800.523.2347

PANEL CLIP REQUIREMENTS - PERPENDICULAR FRAMING

ADAPTACLAD RS

DESIGN & INSTALLATION DETAILS


Date:
9/1/2026

Drawn By:
JJM

Detail Set:
AC-RS

Dwg. No.:
A-401

Rev:
00

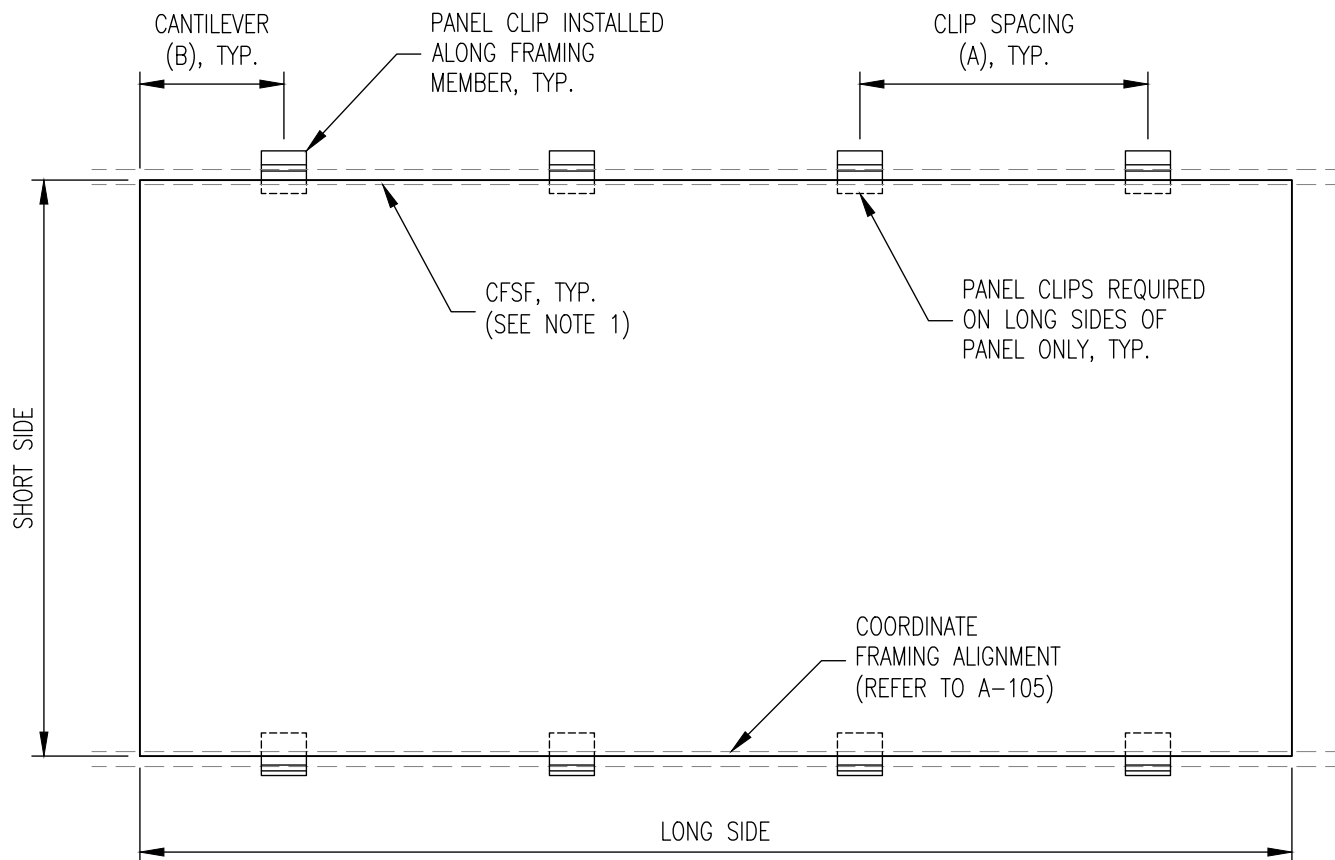

A-402 TYPICAL LANDSCAPE PANEL
ALIGNED FRAMING

THIS DETAIL ALSO APPLIES TO PORTRAIT PANELS OVER VERTICAL (ALIGNED / PARALLEL) FRAMING

NOTES:

1. PANEL CLIP REFERS TO JOINT, STARTER, OR END CLIPS AS REQUIRED FOR INSTALLATION
2. PANEL CLIP REQUIREMENTS:
 - 4 PANEL CLIPS (MIN) PER PANEL; PROVIDE SUPPLEMENTAL FRAMING AS REQUIRED
 - REFER TO A-106 FOR CONDITIONS WITH ROTATED PANEL STIFFENERS
 - REFER TO A-406 FOR SET SCREW REQUIREMENTS
4. REFER TO A-502 FOR REQUIRED NUMBER OF INSTALLATION SCREWS PER CLIP

**TABLE 402: CLIP SPACING BY WIND LOAD
(ALIGNED / PARALLEL FRAMING)**

STRUCTURAL CAPACITY (PSF) [ASD]	MAXIMUM CLIP SPACING (A) (INCHES)	MAXIMUM CANTILEVER (B) (INCHES)
40	24	8
60	16	8
80 *	12	6
100 *		

NOTE: REFER TO A-404 & A-405 FOR CONDITIONS WITH SPECIAL CLIP REQUIREMENTS

* REQUIRES SET SCREW INSTALLATION AT EVERY PANEL CLIP (REFER TO A-406)



LAMINATORS
Composite Panel Solutions

www.LaminatorsInc.com

800.523.2347

PANEL CLIP REQUIREMENTS - ALIGNED / PARALLEL FRAMING

ADAPTACLAD RS

DESIGN & INSTALLATION DETAILS


Date:
9/1/2026

Drawn By:
JJM

Detail Set:
AC-RS

Dwg. No.:
A-402

Rev:
00

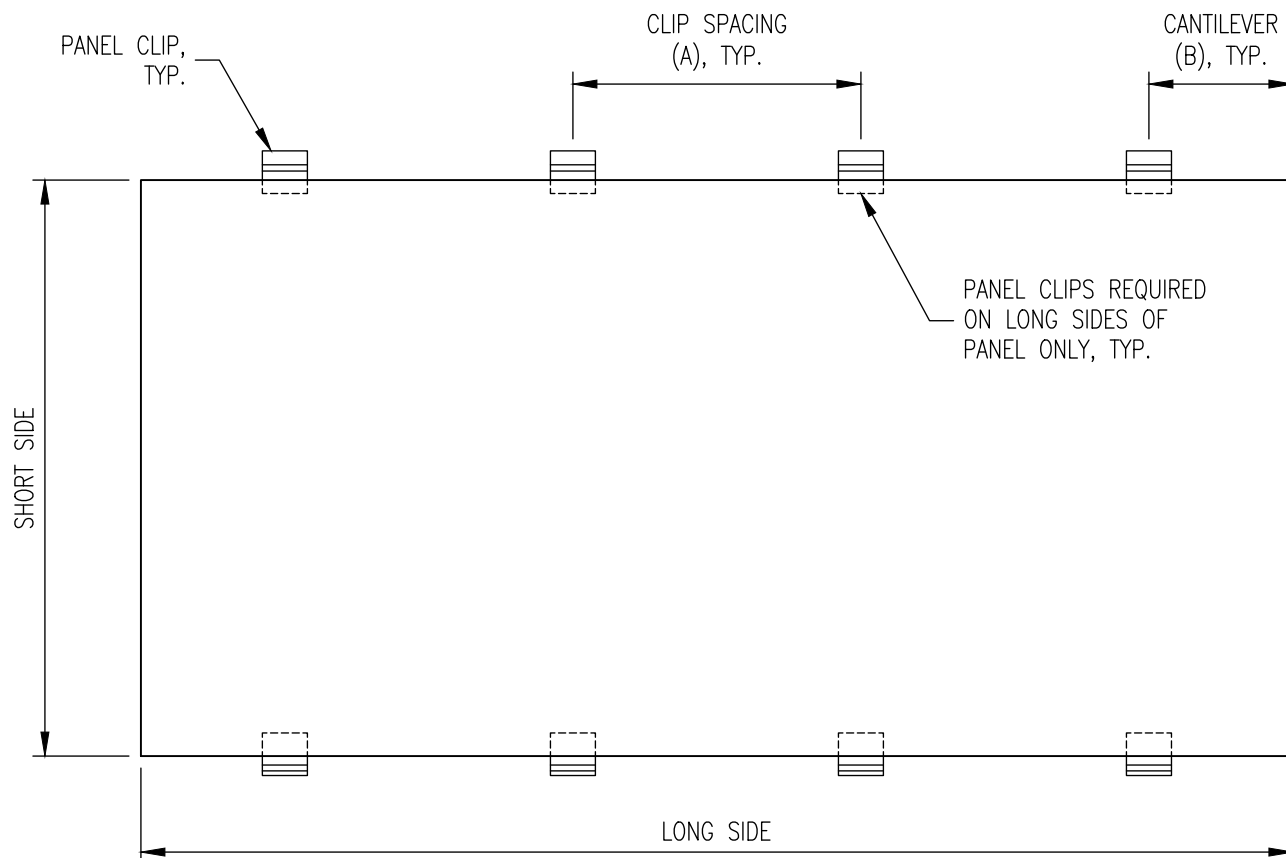

A-403 TYPICAL LANDSCAPE PANEL
CONTINUOUS SUBSTRATES

THIS DETAIL ALSO APPLIES TO PORTRAIT PANELS OVER CONTINUOUS SUBSTRATES

NOTES:

1. CONTINUOUS SUBSTRATES ARE DEFINED AS OMEGA CI, PLYWOOD, OSB, CONCRETE, AND CMU
2. PANEL CLIP REFERS TO JOINT, STARTER, OR END CLIPS AS REQUIRED FOR INSTALLATION
3. PANEL CLIP REQUIREMENTS:
 - 4 PANEL CLIPS (MIN) PER PANEL; PROVIDE SUPPLEMENTAL FRAMING AS REQUIRED
 - REFER TO A-106 FOR CONDITIONS WITH ROTATED PANEL STIFFENERS
 - REFER TO A-406 FOR SET SCREW REQUIREMENTS
4. REFER TO THE FOLLOWING FOR REQUIRED NUMBER OF INSTALLATION SCREWS PER CLIP:
 - A-503 15/32" (1/2" NOM) PLYWOOD
 - A-504 19/32" (5/8" NOM) PLYWOOD
 - A-505 19/32" (5/8" NOM) OSB
 - A-506 CONCRETE
 - A-507 CMU

**TABLE 403: CLIP SPACING BY WIND LOAD
(CONTINUOUS SUBSTRATES*)**

STRUCTURAL CAPACITY (PSF) [ASD]	MAXIMUM CLIP SPACING (A) (INCHES)	MAXIMUM CANTILEVER (B) (INCHES)
40	24	8
60	16	8
80 **	12	6
100 **		

NOTE: REFER TO A-404 & A-405 FOR CONDITIONS WITH SPECIAL CLIP REQUIREMENTS

* INSTALLATIONS OVER 15/32" PLYWOOD AND 19/32" OSB LIMITED TO 60 PSF (ASD) STRUCTURAL CAPACITY

** REQUIRES SET SCREW INSTALLATION AT EVERY PANEL CLIP (REFER TO A-406)



LAMINATORS
Composite Panel Solutions

www.LaminatorsInc.com

800.523.2347

PANEL CLIP REQUIREMENTS - CONTINUOUS SUBSTRATES

ADAPTA CLAD RS

DESIGN & INSTALLATION DETAILS


Date:
9/1/2026

Drawn By:
JJM

Detail Set:
AC-RS

Dwg. No.:
A-403

Rev:
00

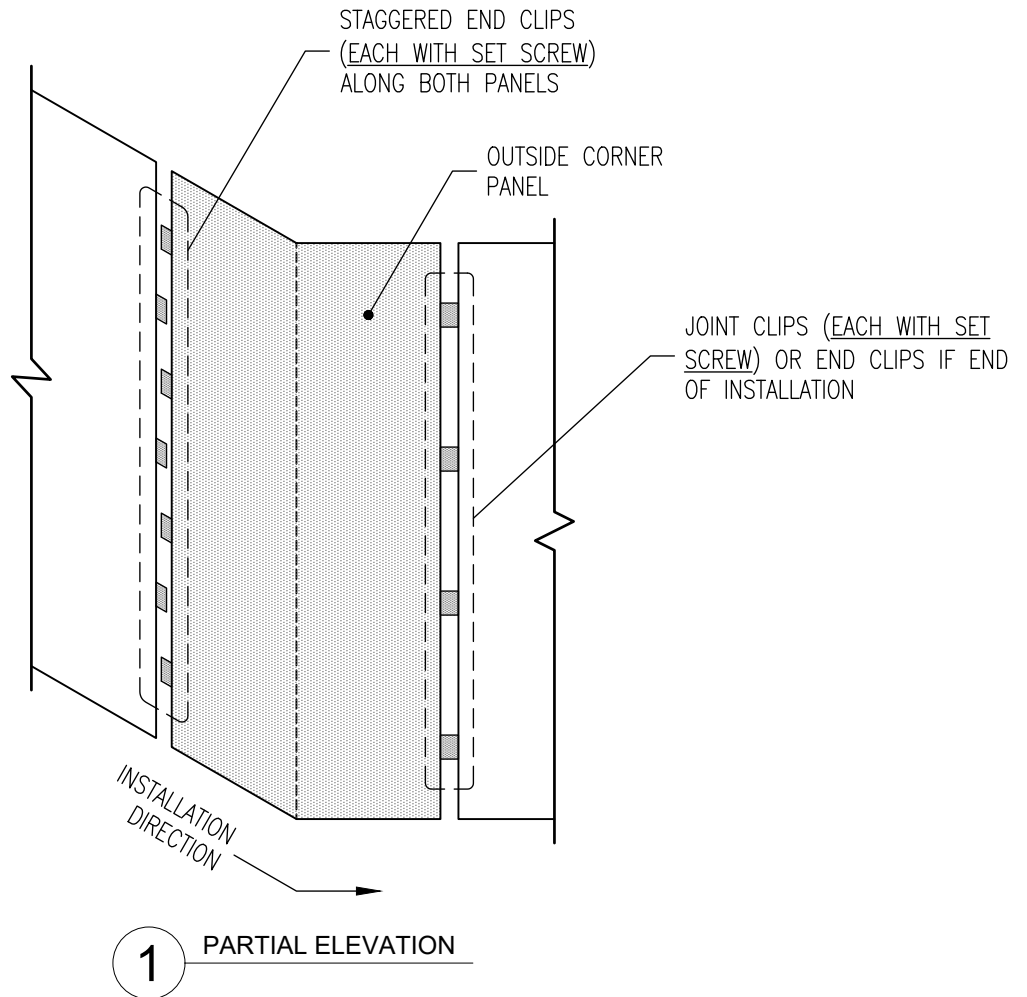

PROVIDE SUPPLEMENTAL FRAMING AS REQUIRED TO SUPPORT ALL PANEL CLIP LOCATIONS



LAMINATORS
Composite Panel Solutions

www.LaminatorsInc.com

800.523.2347

SPECIAL REQUIREMENTS - PORTRAIT PANEL AT OUSIDE CORNER

ADAPTACLAD RS

DESIGN & INSTALLATION DETAILS


Date:
9/1/2026

Drawn By:
JJM

Detail Set:
AC-RS


Dwg. No.:
A-404

Rev:
00

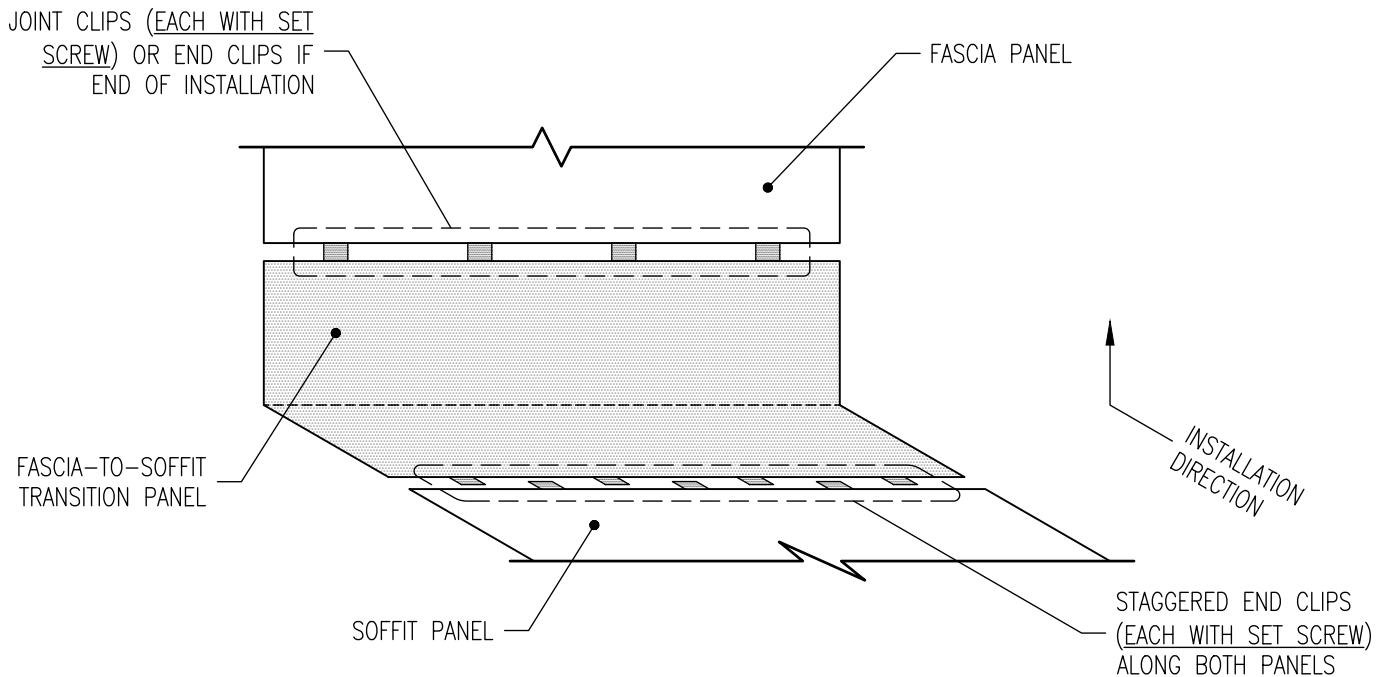


2 PARTIAL ELEVATION

PROVIDE SUPPLEMENTAL FRAMING AS REQUIRED TO SUPPORT ALL PANEL CLIP LOCATIONS


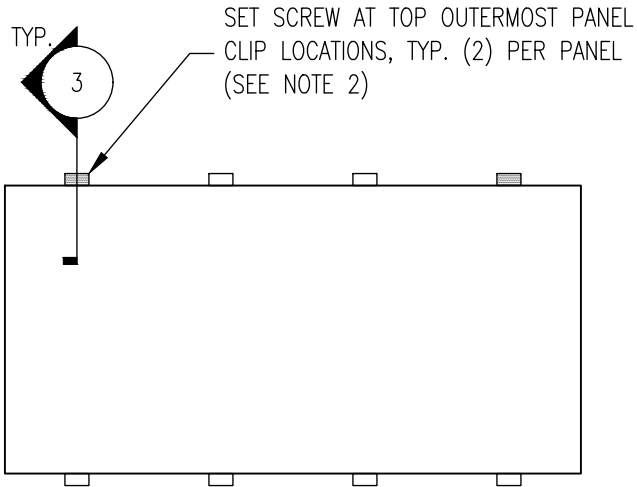


1 TYPICAL LANDSCAPE PANEL

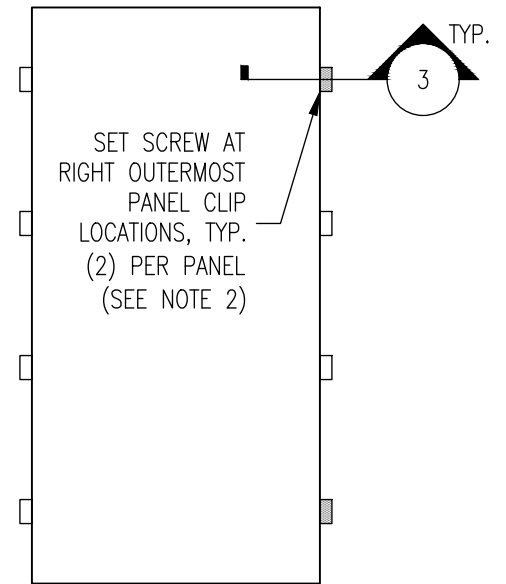

2 TYPICAL PORTRAIT PANEL

NOTE: CLIP DOES NOT SEAT AGAINST PERIMETER EXTRUSION

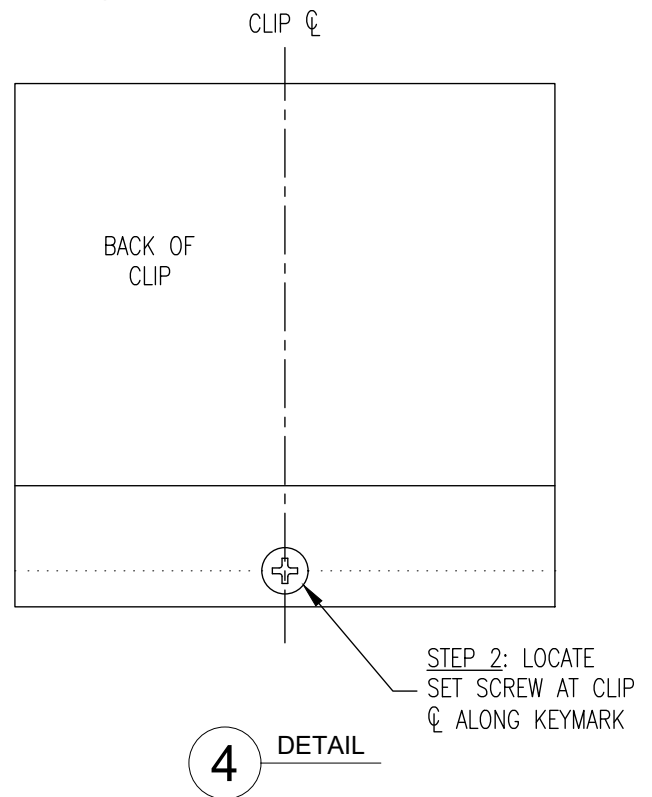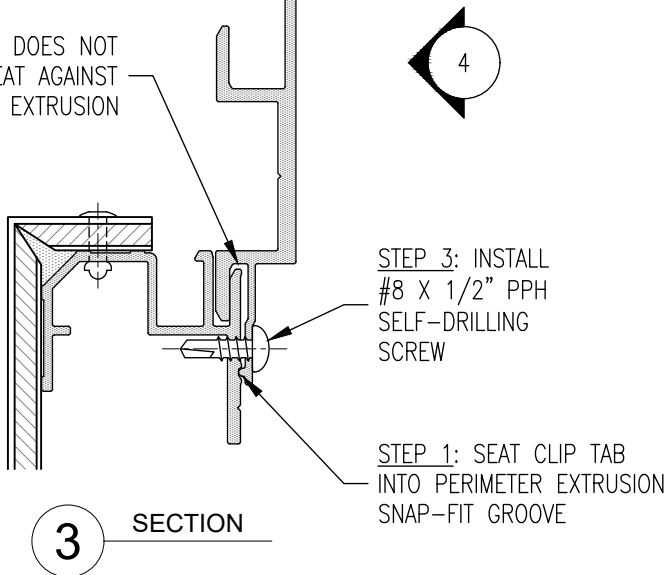

NOTES:

1. JOINT CLIP SHOWN; SET SCREW INSTALLATION ALSO REQUIRED FOR END CLIPS
2. SET SCREW REQUIRED AT ALL JOINT AND END CLIP LOCATIONS FOR 80 PSF (ASD) AND HIGHER STRUCTURAL CAPACITY



LAMINATORS
Composite Panel Solutions

www.LaminatorsInc.com

800.523.2347

SET SCREW REQUIREMENTS

ADAPTA CLAD RS

DESIGN & INSTALLATION DETAILS

Date:
9/1/2026

Drawn By:
JJM

Detail Set:
AC-RS

Dwg. No.:
A-406

Rev:
00

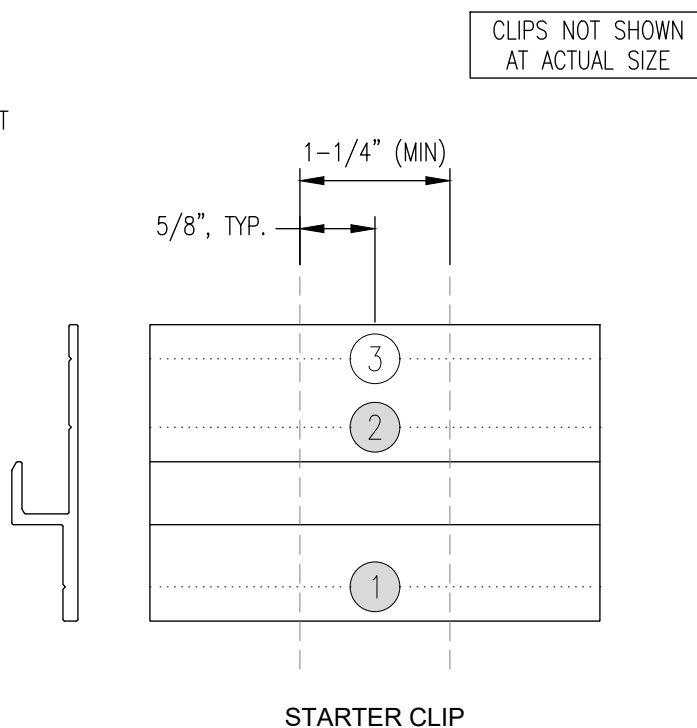
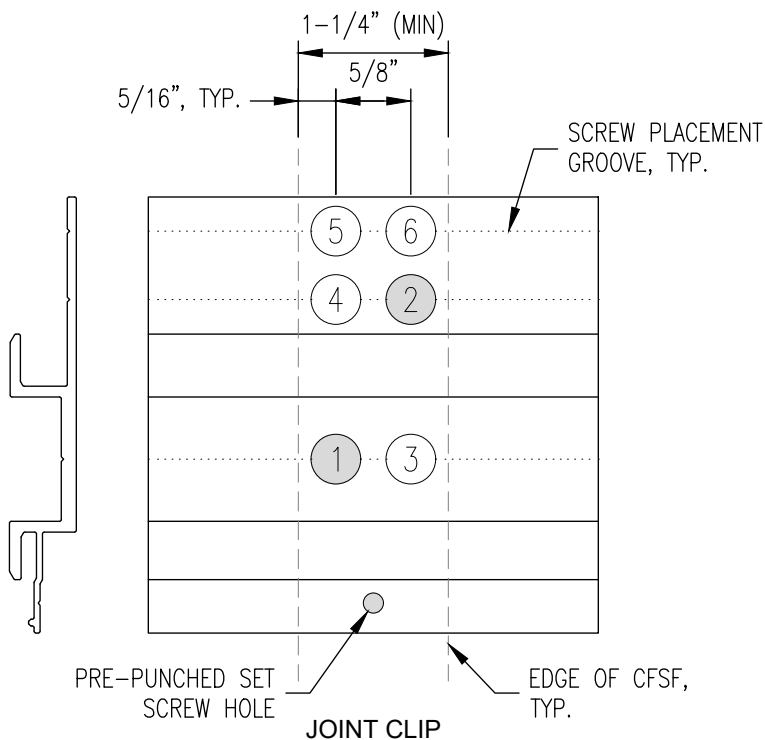


TABLE 501: CFSF ¹ (PERPENDICULAR)
NO. OF REQUIRED SCREWS ² PER CLIP

STRUCTURAL CAPACITY (PSF) [ASD]	CLIP SPACING (INCHES)	PANEL SPAN ^{3 4} (INCHES)		
		58	48	24
JOINT CLIP				
40	16	4	4	2
	24	6	5	3
60	16	6	5	3
STARTER / END CLIP				
40	16	2	2	2
	24	3	3	2
60	16	3	3	2


1. SUBSTRATE CRITERIA MINIMUMS:

- 18 GA. (43 MILS)
- $F_u = 45$ KSI (GRADE 33)
- 1-1/4" FACE FLANGE WIDTH

2. SCREWS SHALL BE DAGGERZ #10-16 X 2" HEX WASHER HEAD (HWH) SELF-DRILLING SCREWS OR OTHER AS APPROVED BY LAMINATORS

3. TO USE TABLE, SELECT PANEL SPAN GREATER THAN OR EQUAL TO SIZE OF ACTUAL PANEL TO BE INSTALLED

4. PANEL SPAN IS THE DISTANCE BETWEEN CLIP ATTACHMENT SIDES AND IS PARALLEL TO DIRECTION OF PANEL STIFFENER (TYPICALLY THE SHORT SIDE OF THE PANEL UNLESS STIFFENERS ARE ROTATED, REFER TO A-106)

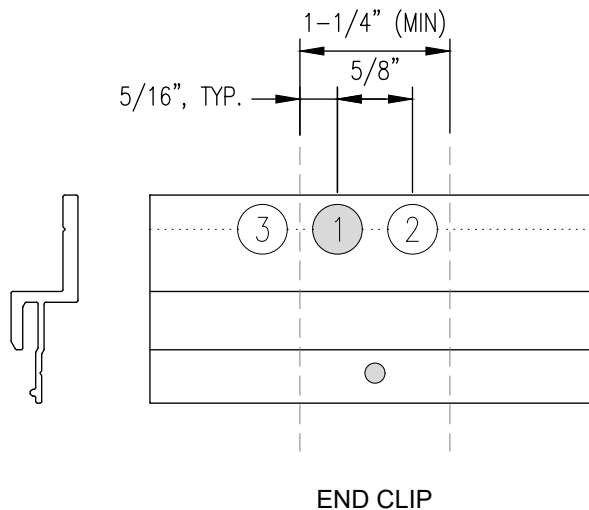

INSTALLATION TIPS:

- INSTALL SCREWS IN NUMBERED SEQUENCE INDICATED
- SHADED HOLES ARE PRE-PUNCHED BY LAMINATORS; PRE-DRILLING ADDITIONAL REQUIRED HOLE LOCATIONS IS RECOMMENDED FOR EASE OF INSTALLATION
- ENSURE CLIPS DO NOT ROTATE DURING INSTALLATION



LAMINATORS
Composite Panel Solutions

www.LaminatorsInc.com

800.523.2347

PANEL CLIP SCREW SCHEDULE - 18 GA. CFSF (PERPENDICULAR)

ADAPTA CLAD RS

DESIGN & INSTALLATION DETAILS

Date:
9/1/2026

Drawn By:
JJM

Detail Set:
AC-RS

Dwg. No.:
A-501

Rev:
00

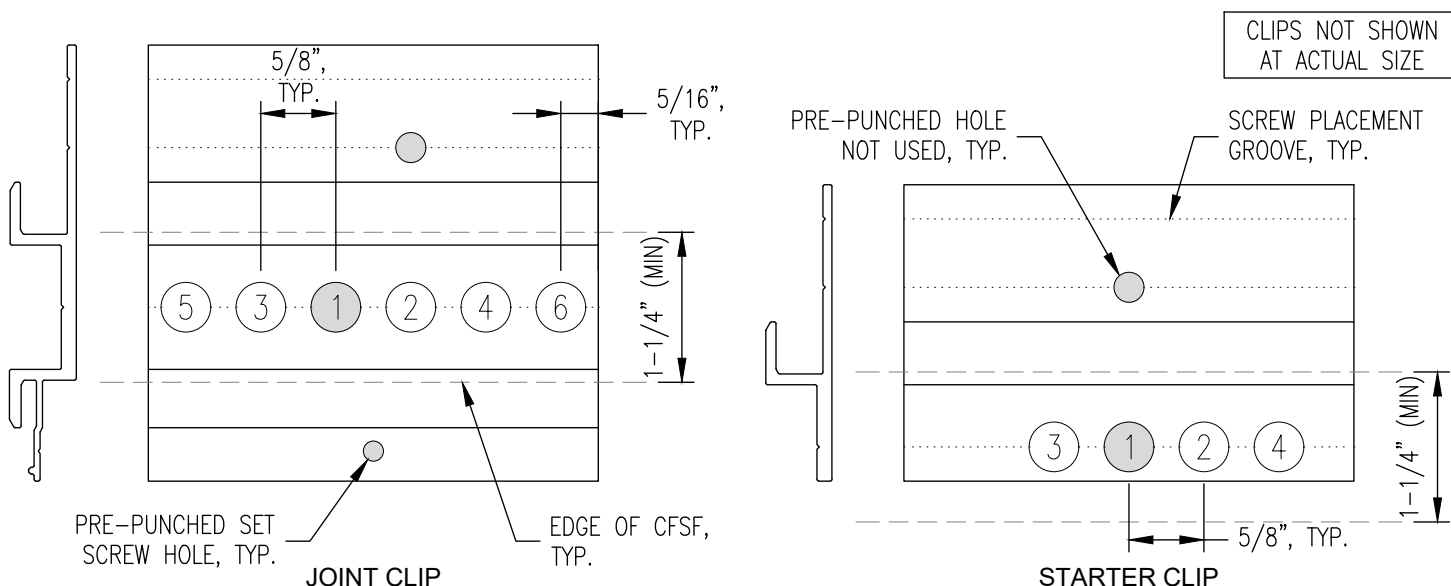


TABLE 502: CFSF¹ (ALIGNED / PARALLEL)
NO. OF REQUIRED SCREWS² PER CLIP

STRUCTURAL CAPACITY (PSF) [ASD]	CLIP SPACING (INCHES)	PANEL SPAN ^{3 4} (INCHES)		
		58	48	24
JOINT CLIP				
40	16	4	4	2
	24	6	5	3
60	16	6	5	3
80	12	5	4	3
100	12	6	5	3
STARTER / END CLIP				
40	16	2	2	2
	24	3	3	2
60	16	3	3	2
80	12	3	3	2
100	12	4	3	2


1. SUBSTRATE CRITERIA MINIMUMS:

- 18 GA. (43 MILS)
- $F_u = 45$ KSI (GRADE 33)
- 1-1/4" FACE FLANGE WIDTH

2. SCREWS SHALL BE DAGGERZ #10-16 X 2" HEX WASHER HEAD (HWH) SELF-DRILLING SCREWS OR OTHER AS APPROVED BY LAMINATORS; 1" LENGTH SCREWS PERMITTED FOR DIRECT ATTACHMENT TO CFSF

3. TO USE TABLE, SELECT PANEL SPAN GREATER THAN OR EQUAL TO SIZE OF ACTUAL PANEL TO BE INSTALLED

4. PANEL SPAN IS THE DISTANCE BETWEEN CLIP ATTACHMENT SIDES AND IS PARALLEL TO DIRECTION OF PANEL STIFFENER (TYPICALLY THE SHORT SIDE OF THE PANEL UNLESS STIFFENERS ARE ROTATED, REFER TO A-106)

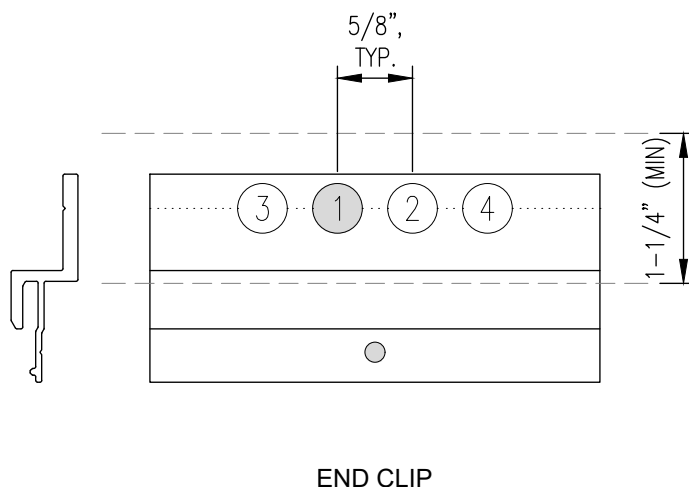

INSTALLATION TIPS:

- INSTALL SCREWS IN NUMBERED SEQUENCE INDICATED
- SHADED HOLES ARE PRE-PUNCHED BY LAMINATORS; PRE-DRILLING ADDITIONAL REQUIRED HOLE LOCATIONS IS RECOMMENDED FOR EASE OF INSTALLATION
- ENSURE CLIPS DO NOT ROTATE DURING INSTALLATION



LAMINATORS
Composite Panel Solutions

www.LaminatorsInc.com

800.523.2347

PANEL CLIP SCREW SCHEDULE - 18 GA. CFSF (ALIGNED / PARALLEL)

ADAPTA CLAD RS

DESIGN & INSTALLATION DETAILS

Date:
9/1/2026

Drawn By:
JJM

Detail Set:
AC-RS

Dwg. No.:
A-502

Rev:
00



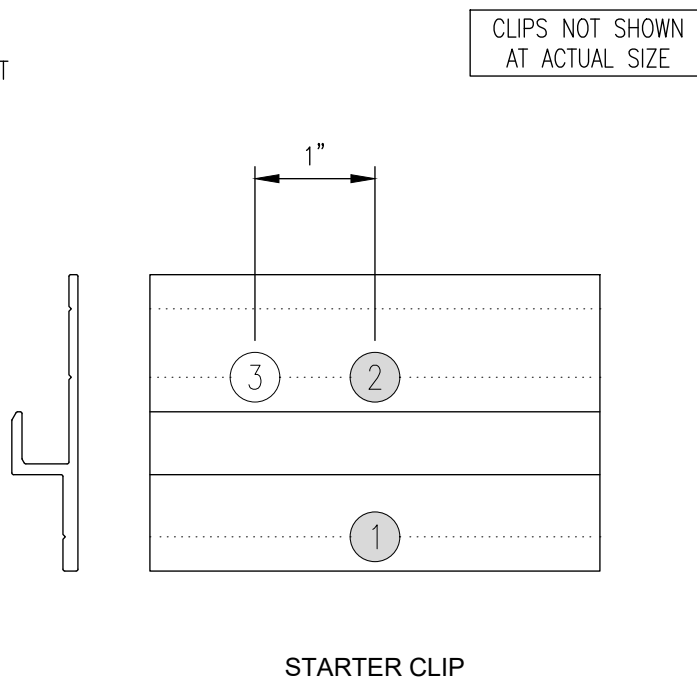


TABLE 503: 15/32" (1/2" NOM) PLYWOOD ¹
NO. OF REQUIRED SCREWS ² PER CLIP

STRUCTURAL CAPACITY (PSF) [ASD]	CLIP SPACING (INCHES)	PANEL SPAN ^{3 4} (INCHES)		
		58	48	24
JOINT CLIP				
40	24	6	5	3
60	16	6	5	3
STARTER / END CLIP				
40	24	3	3	2
60	16	3	3	2

- SUBSTRATE CRITERIA MINIMUMS:
 - 15/32" THICKNESS (EXTERIOR GRADE)
 - SPECIFIC GRAVITY (G) = 0.55 (SOUTHERN PINE)
- SCREWS SHALL BE DAGGERZ #10-16 X 2" HEX WASHER HEAD (HWH) SELF-DRILLING SCREWS, #10 X 2" HWH HiLo THREAD WOOD SCREWS, OR OTHER AS APPROVED BY LAMINATORS
- TO USE TABLE, SELECT PANEL SPAN GREATER THAN OR EQUAL TO SIZE OF ACTUAL PANEL TO BE INSTALLED
- PANEL SPAN IS THE DISTANCE BETWEEN CLIP ATTACHMENT SIDES AND IS PARALLEL TO DIRECTION OF PANEL STIFFENER (TYPICALLY THE SHORT SIDE OF THE PANEL UNLESS STIFFENERS ARE ROTATED, REFER TO A-106)

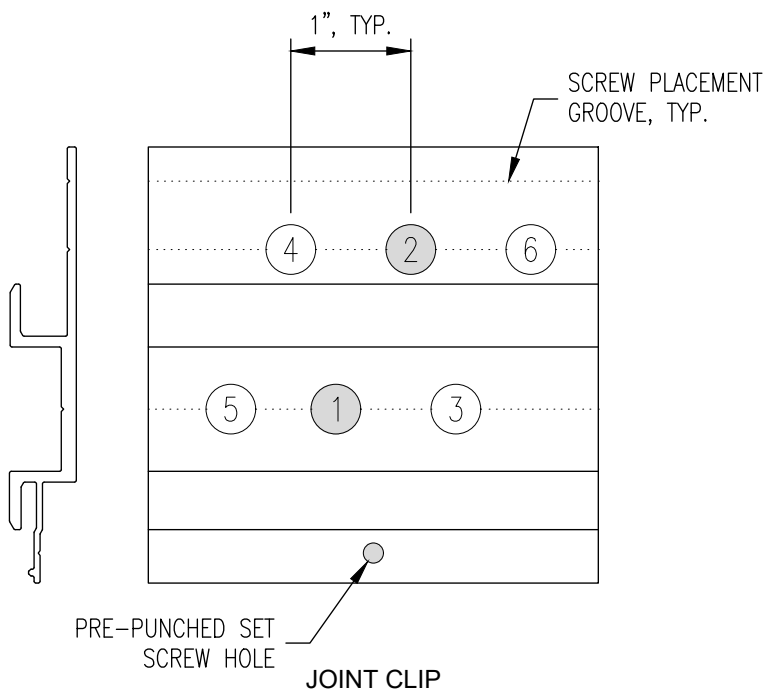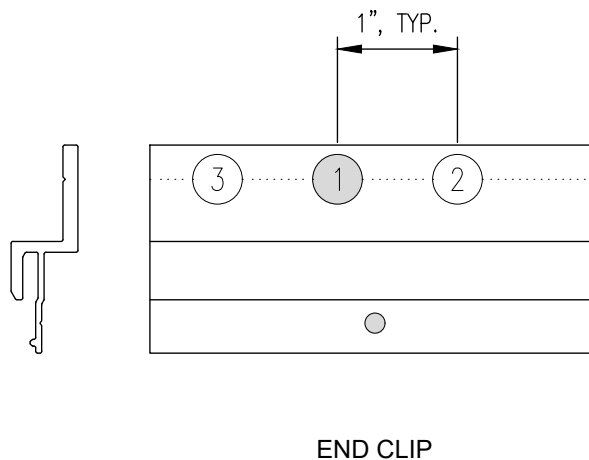

INSTALLATION TIPS:

- INSTALL SCREWS IN NUMBERED SEQUENCE INDICATED
- SHADED HOLES ARE PRE-PUNCHED BY LAMINATORS; PRE-DRILLING ADDITIONAL REQUIRED HOLE LOCATIONS IS RECOMMENDED FOR EASE OF INSTALLATION
- ENSURE CLIPS DO NOT ROTATE DURING INSTALLATION



LAMINATORS
Composite Panel Solutions

www.LaminatorsInc.com

800.523.2347

PANEL CLIP SCREW SCHEDULE - 15/32" (1/2" NOM) PLYWOOD

ADAPTA CLAD RS

DESIGN & INSTALLATION DETAILS

Date:
9/1/2026

Drawn By:
JJM

Detail Set:
AC-RS

Dwg. No.:
A-503

Rev:
00



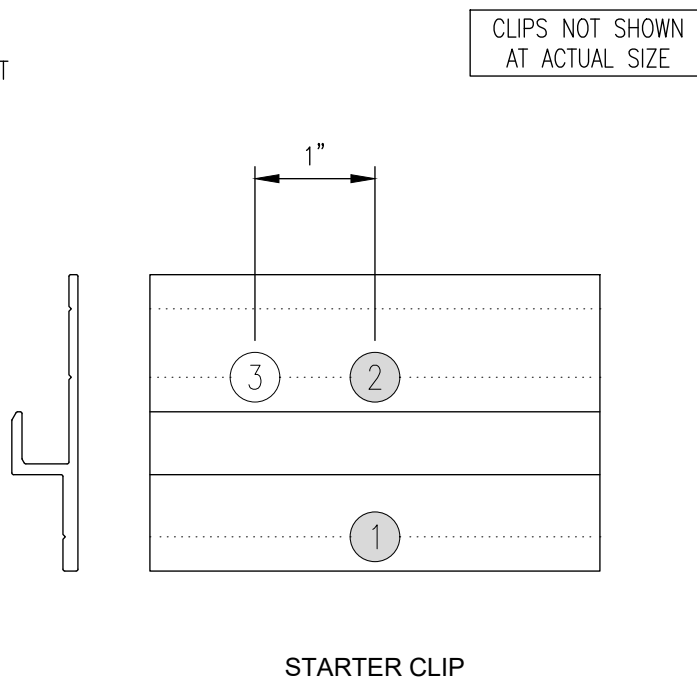


TABLE 504: 19/32" (5/8" NOM) PLYWOOD ¹
NO. OF REQUIRED SCREWS ² PER CLIP

STRUCTURAL CAPACITY (PSF) [ASD]	CLIP SPACING (INCHES)	PANEL SPAN ^{3 4} (INCHES)		
		58	48	24
JOINT CLIP				
40	24	5	4	3
60	16	5	4	3
80	12	5	4	3
100	12	6	5	3
STARTER / END CLIP				
40	24	3	2	2
60	16	3	2	2
80	12	3	2	2
100	12	3	3	2

- SUBSTRATE CRITERIA MINIMUMS:
 - 19/32" THICKNESS (EXTERIOR GRADE)
 - SPECIFIC GRAVITY (G) = 0.55 (SOUTHERN PINE)
- SCREWS SHALL BE DAGGERZ #10-16 X 2" HEX WASHER HEAD (HWH) SELF-DRILLING SCREWS, #10 X 2" HWH HiLo THREAD WOOD SCREWS, OR OTHER AS APPROVED BY LAMINATORS
- TO USE TABLE, SELECT PANEL SPAN GREATER THAN OR EQUAL TO SIZE OF ACTUAL PANEL TO BE INSTALLED
- PANEL SPAN IS THE DISTANCE BETWEEN CLIP ATTACHMENT SIDES AND IS PARALLEL TO DIRECTION OF PANEL STIFFENER (TYPICALLY THE SHORT SIDE OF THE PANEL UNLESS STIFFENERS ARE ROTATED, REFER TO A-106)

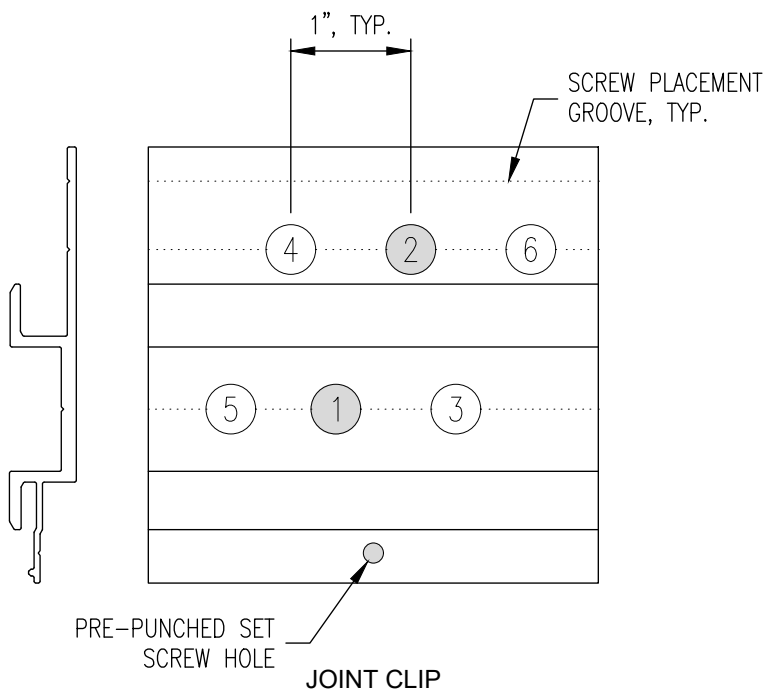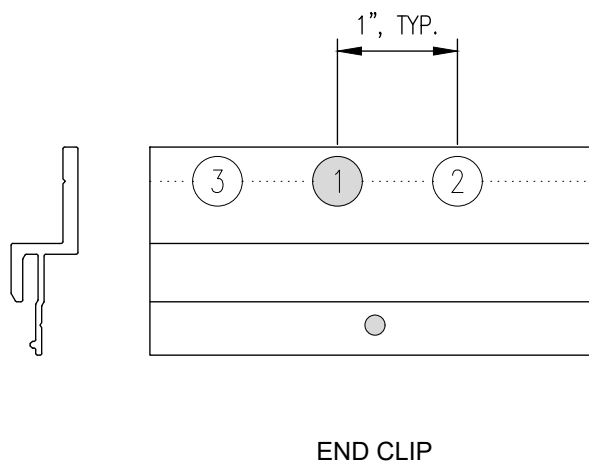

INSTALLATION TIPS:

- INSTALL SCREWS IN NUMBERED SEQUENCE INDICATED
- SHADED HOLES ARE PRE-PUNCHED BY LAMINATORS; PRE-DRILLING ADDITIONAL REQUIRED HOLE LOCATIONS IS RECOMMENDED FOR EASE OF INSTALLATION
- ENSURE CLIPS DO NOT ROTATE DURING INSTALLATION



LAMINATORS
Composite Panel Solutions

www.LaminatorsInc.com

800.523.2347

PANEL CLIP SCREW SCHEDULE - 19/32" (5/8" NOM) PLYWOOD

ADAPTA CLAD RS

DESIGN & INSTALLATION DETAILS

Date:
9/1/2026

Drawn By:
JJM

Detail Set:
AC-RS

Dwg. No.:
A-504

Rev:
00



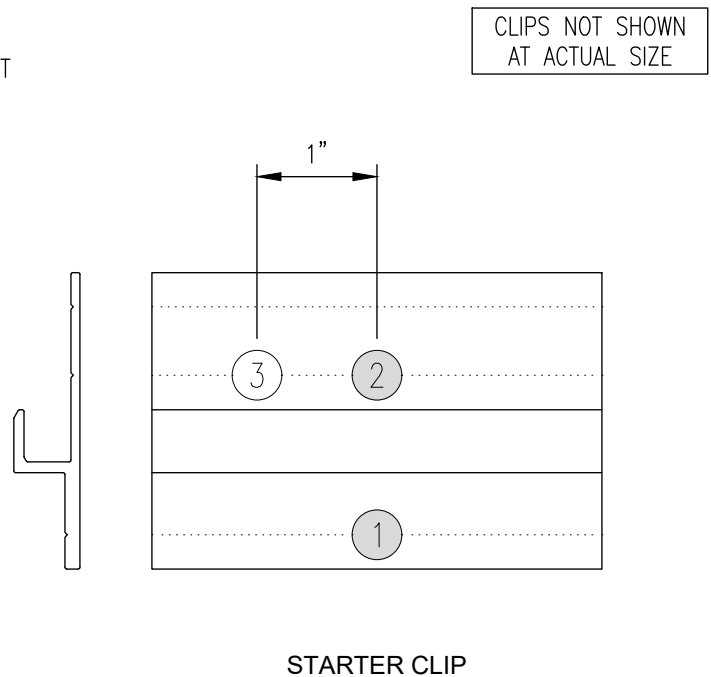


TABLE 505: 19/32" (5/8" NOM) OSB ¹
NO. OF REQUIRED SCREWS ² PER CLIP

STRUCTURAL CAPACITY (PSF) [ASD]	CLIP SPACING (INCHES)	PANEL SPAN ^{3 4} (INCHES)		
		58	48	24
JOINT CLIP				
40	24	6	5	3
60	16	6	5	3
STARTER / END CLIP				
40	24	3	3	2
60	16	3	3	2

- SUBSTRATE CRITERIA MINIMUMS:
 - 19/32" THICKNESS (EXTERIOR GRADE)
 - SPECIFIC GRAVITY (G) = 0.49 (SOUTHERN PINE)
- SCREWS SHALL BE DAGGERZ #10-16 X 2" HEX WASHER HEAD (HWH) SELF-DRILLING SCREWS, #10 X 2" HWH HiLo THREAD WOOD SCREWS, OR OTHER AS APPROVED BY LAMINATORS
- TO USE TABLE, SELECT PANEL SPAN GREATER THAN OR EQUAL TO SIZE OF ACTUAL PANEL TO BE INSTALLED
- PANEL SPAN IS THE DISTANCE BETWEEN CLIP ATTACHMENT SIDES AND IS PARALLEL TO DIRECTION OF PANEL STIFFENER (TYPICALLY THE SHORT SIDE OF THE PANEL UNLESS STIFFENERS ARE ROTATED, REFER TO A-106)

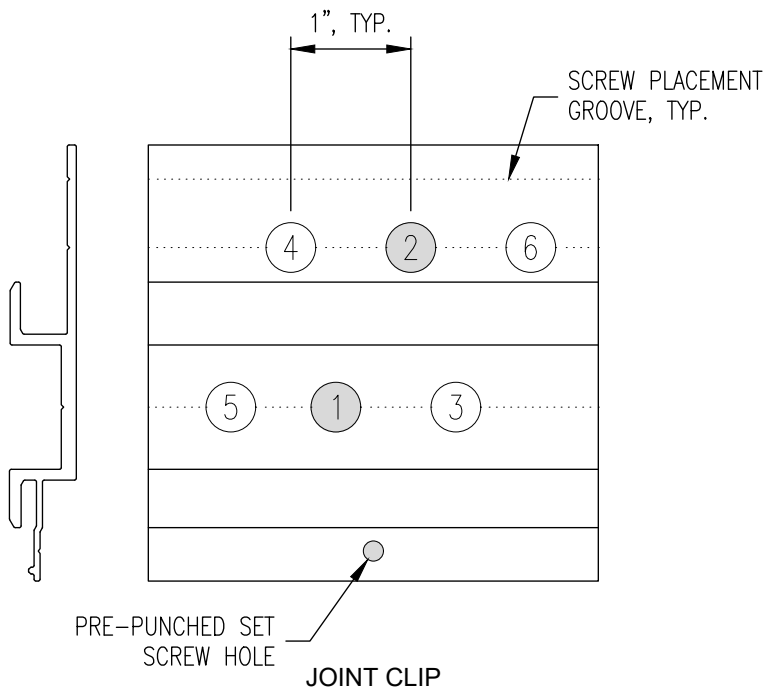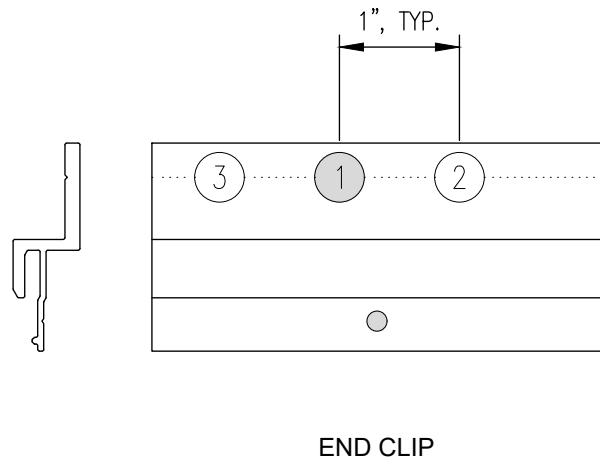

INSTALLATION TIPS:

- INSTALL SCREWS IN NUMBERED SEQUENCE INDICATED
- SHADED HOLES ARE PRE-PUNCHED BY LAMINATORS; PRE-DRILLING ADDITIONAL REQUIRED HOLE LOCATIONS IS RECOMMENDED FOR EASE OF INSTALLATION
- ENSURE CLIPS DO NOT ROTATE DURING INSTALLATION



LAMINATORS
Composite Panel Solutions

www.LaminatorsInc.com

800.523.2347

PANEL CLIP SCREW SCHEDULE - 19/32" (5/8" NOM) OSB

ADAPTA CLAD RS

DESIGN & INSTALLATION DETAILS

Date:
9/1/2026

Drawn By:
JJM

Detail Set:
AC-RS

Dwg. No.:
A-505

Rev:
00

CLIPS NOT SHOWN
AT ACTUAL SIZE



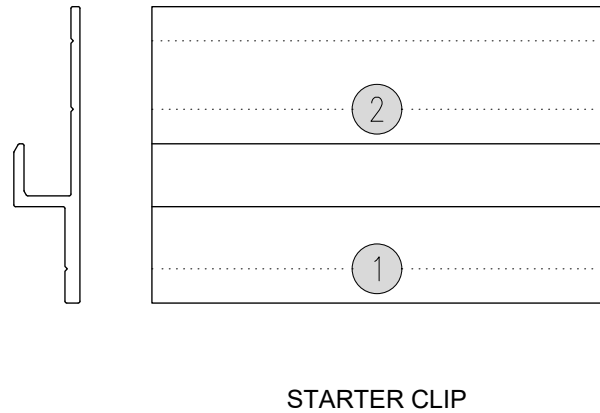


TABLE 506: CONCRETE¹
NO. OF REQUIRED SCREWS² PER CLIP

STRUCTURAL CAPACITY (PSF) [ASD]	CLIP SPACING (INCHES)	PANEL SPAN ^{3 4} (INCHES)		
		58	48	24
JOINT CLIP				
40	24	2	2	2
60	16	2	2	2
80	12	2	2	2
100	12	2	2	2
STARTER / END CLIP				
40	24	2	2	2
60	16	2	2	2
80	12	2	2	2
100	12	2	2	2

- SUBSTRATE CRITERIA MINIMUMS:
 - NORMAL WEIGHT
 - COMPRESSIVE STRENGTH (f_c) = 2,500 PSI
- SCREWS SHALL BE DEWALT ULTRA CON+ 3/16" X 2-1/4" HEX WASHER HEAD (HWH) CONCRETE ANCHORS OR OTHER AS APPROVED BY LAMINATORS
- TO USE TABLE, SELECT PANEL SPAN GREATER THAN OR EQUAL TO SIZE OF ACTUAL PANEL TO BE INSTALLED
- PANEL SPAN IS THE DISTANCE BETWEEN CLIP ATTACHMENT SIDES AND IS PARALLEL TO DIRECTION OF PANEL STIFFENER (TYPICALLY THE SHORT SIDE OF THE PANEL UNLESS STIFFENERS ARE ROTATED, REFER TO A-106)

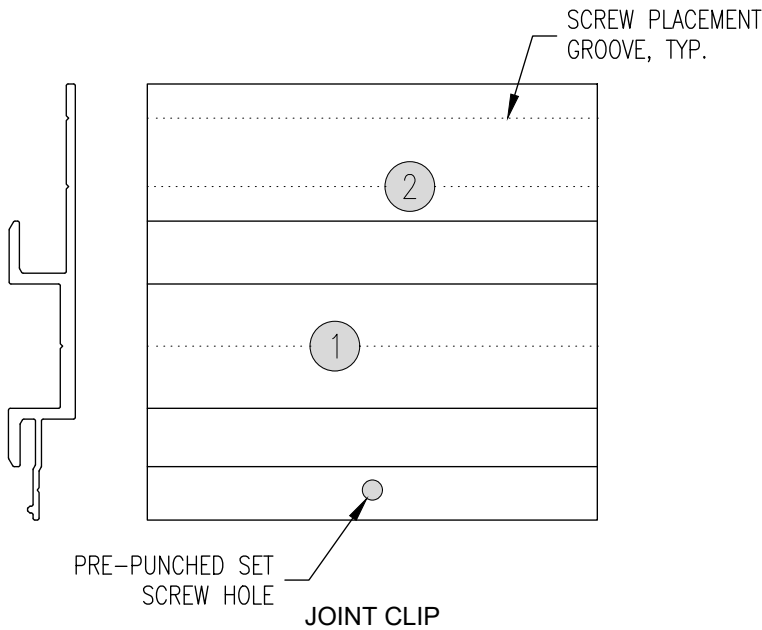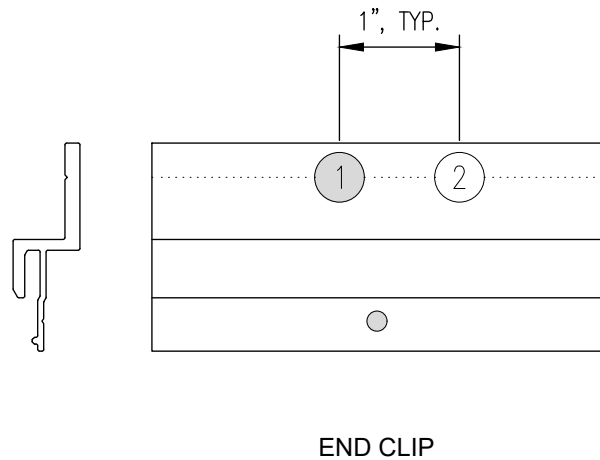

INSTALLATION TIPS:

- INSTALL SCREWS IN NUMBERED SEQUENCE INDICATED
- SHADED HOLES ARE PRE-PUNCHED BY LAMINATORS; PRE-DRILLING ADDITIONAL REQUIRED HOLE LOCATIONS IS RECOMMENDED FOR EASE OF INSTALLATION
- ENSURE CLIPS DO NOT ROTATE DURING INSTALLATION



www.LaminatorsInc.com

800.523.2347

PANEL CLIP SCREW SCHEDULE - CONCRETE

ADAPTA CLAD RS

DESIGN & INSTALLATION DETAILS

Date:
9/1/2026

Drawn By:
JJM

Detail Set:
AC-RS

Dwg. No.:
A-506

Rev:
00



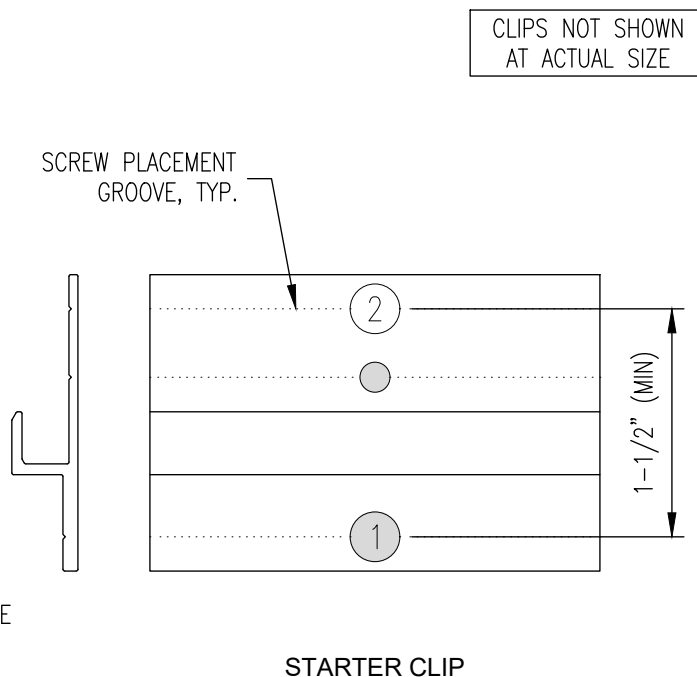


TABLE 507: CMU ¹ NO. OF REQUIRED SCREWS ² PER CLIP				
STRUCTURAL CAPACITY (PSF) [ASD]	CLIP SPACING (INCHES)	PANEL SPAN ^{3 4} (INCHES)		
		58	48	24
JOINT CLIP				
40	24	3	3	2
60	16	3	3	2
80	12	3	3	2
100	12	4	3	2
STARTER / END CLIP				
40	24	2	2	2
60	16	2	2	2
80	12	2	2	2
100	12	2	2	2
1. SUBSTRATE CRITERIA MINIMUMS: • NORMAL WEIGHT (ASTM C90) • COMPRESSIVE STRENGTH (f_m) = 2,000 PSI • FACE SHELL THICKNESS = 1-1/4"				
2. SCREWS SHALL BE DEWALT ULTRA CON+ 3/16" X 2-1/4" HEX WASHER HEAD (HWH) CONCRETE ANCHORS OR OTHER AS APPROVED BY LAMINATORS				
3. TO USE TABLE, SELECT PANEL SPAN GREATER THAN OR EQUAL TO SIZE OF ACTUAL PANEL TO BE INSTALLED				
4. PANEL SPAN IS THE DISTANCE BETWEEN CLIP ATTACHMENT SIDES AND IS PARALLEL TO DIRECTION OF PANEL STIFFENER (TYPICALLY THE SHORT SIDE OF THE PANEL UNLESS STIFFENERS ARE ROTATED, REFER TO A-106)				

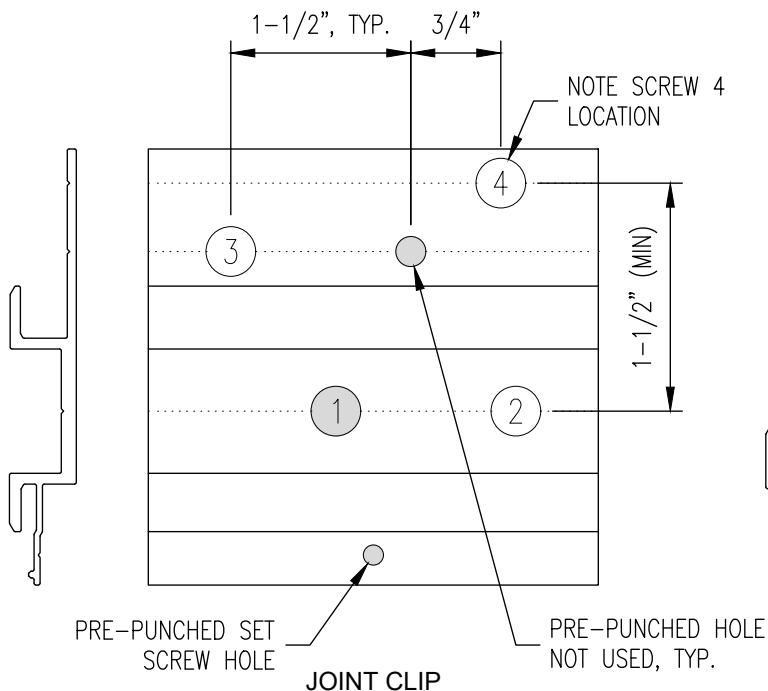

INSTALLATION TIPS:

- INSTALL SCREWS IN NUMBERED SEQUENCE INDICATED
- SHADED HOLES ARE PRE-PUNCHED BY LAMINATORS; PRE-DRILLING ADDITIONAL REQUIRED HOLE LOCATIONS IS RECOMMENDED FOR EASE OF INSTALLATION
- ENSURE CLIPS DO NOT ROTATE DURING INSTALLATION

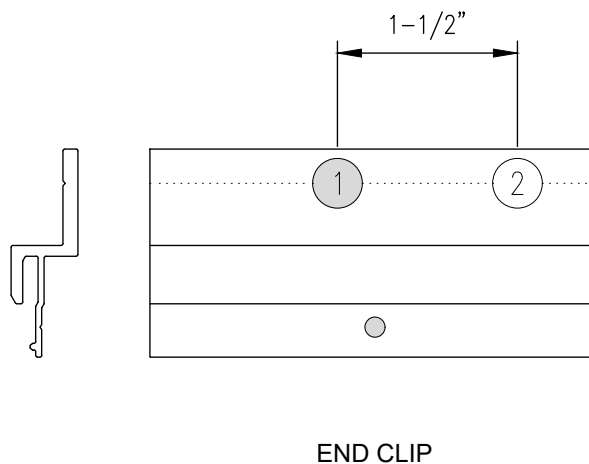

LAMINATORS
Composite Panel Solutions

www.LaminatorsInc.com

800.523.2347

PANEL CLIP SCREW SCHEDULE - CMU

ADAPTA CLAD RS

DESIGN & INSTALLATION DETAILS


Date:
9/1/2026

Drawn By:
JJM


Detail Set:
AC-RS

Dwg. No.:
A-507


Rev:
00

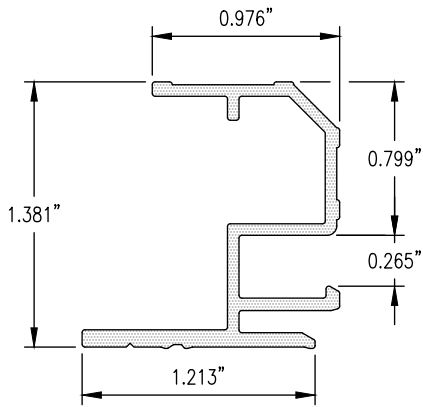


PERIMETER EXTRUSION




PANEL STIFFENER

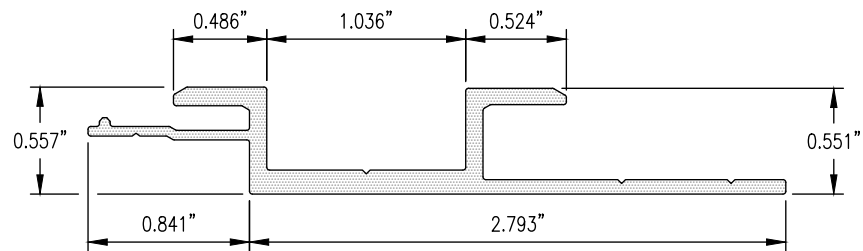

JOINT CLIP

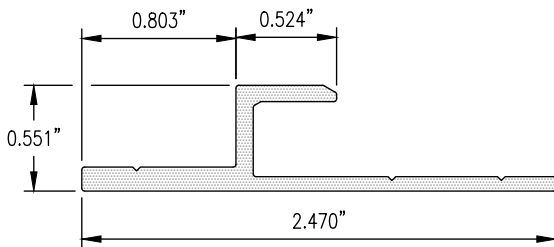

STARTER CLIP

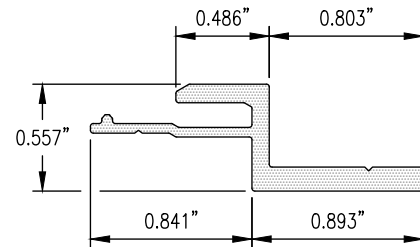

END CLIP



LAMINATORS
Composite Panel Solutions

www.LaminatorsInc.com

800.523.2347

SHAPE PROFILES

ADAPTACLAD RS

MISCELLANEOUS DETAILS


Date:
9/1/2026

Drawn By:
JJM


Detail Set:
AC-RS

Dwg. No.:
M-101


Rev:
00

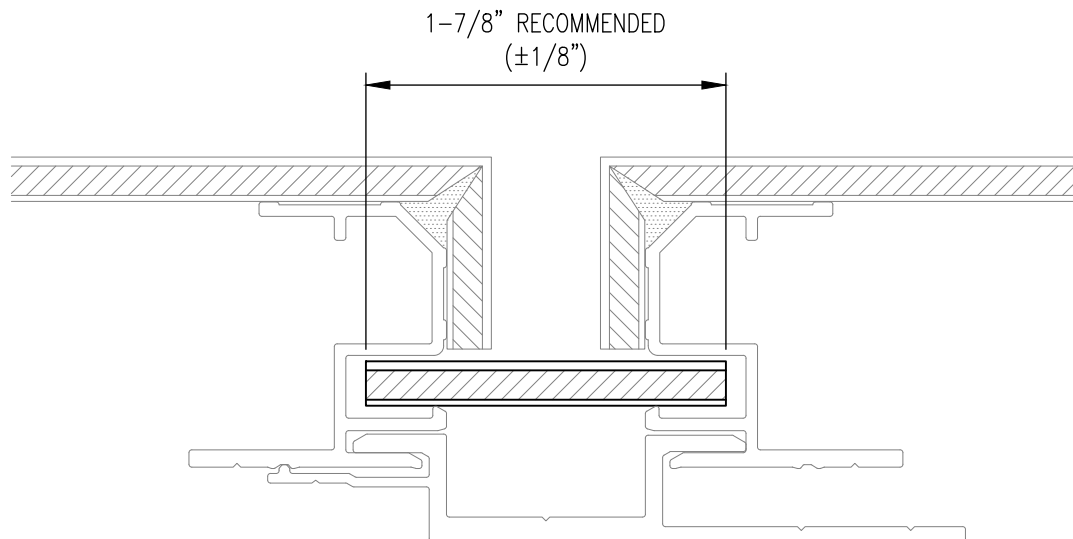

VERTICAL AND HORIZONTAL JOINTS

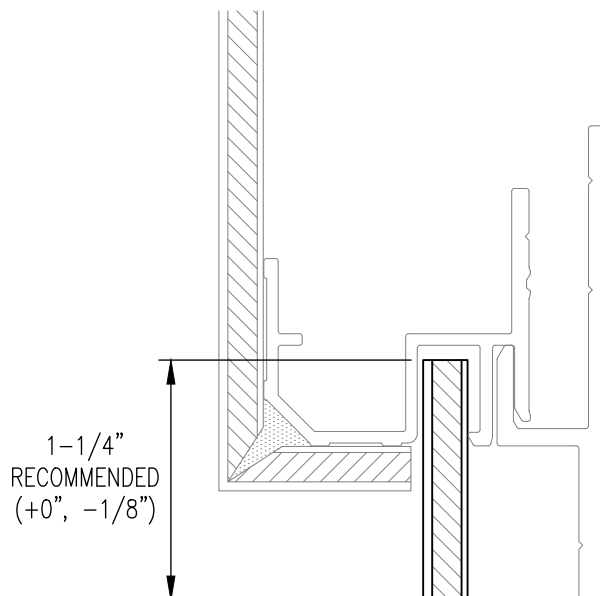

BOTTOM HORIZONTAL AND LEFT
VERTICAL EDGES (TYPICAL)

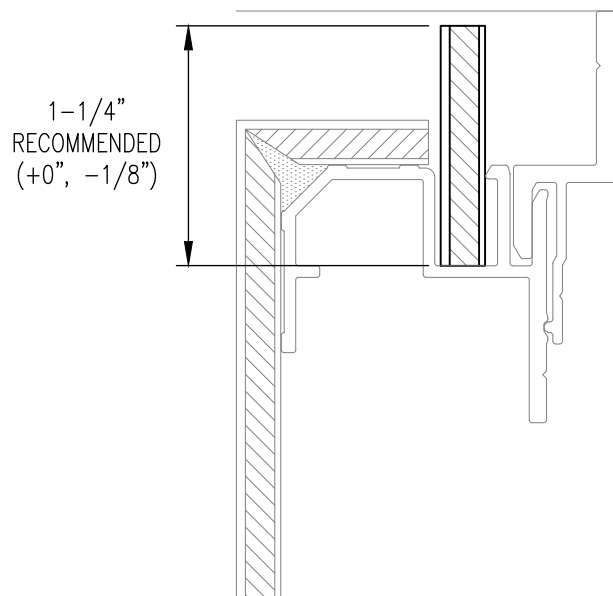

TOP HORIZONTAL AND RIGHT
VERTICAL EDGES (TYPICAL)



LAMINATORS
Composite Panel Solutions

www.LaminatorsInc.com

800.523.2347

INSERT STRIP SIZES

ADAPTACLAD RS

MISCELLANEOUS DETAILS


Date:
9/1/2026

Drawn By:
JJM


Detail Set:
AC-RS

Dwg. No.:
M-102


Rev:
00

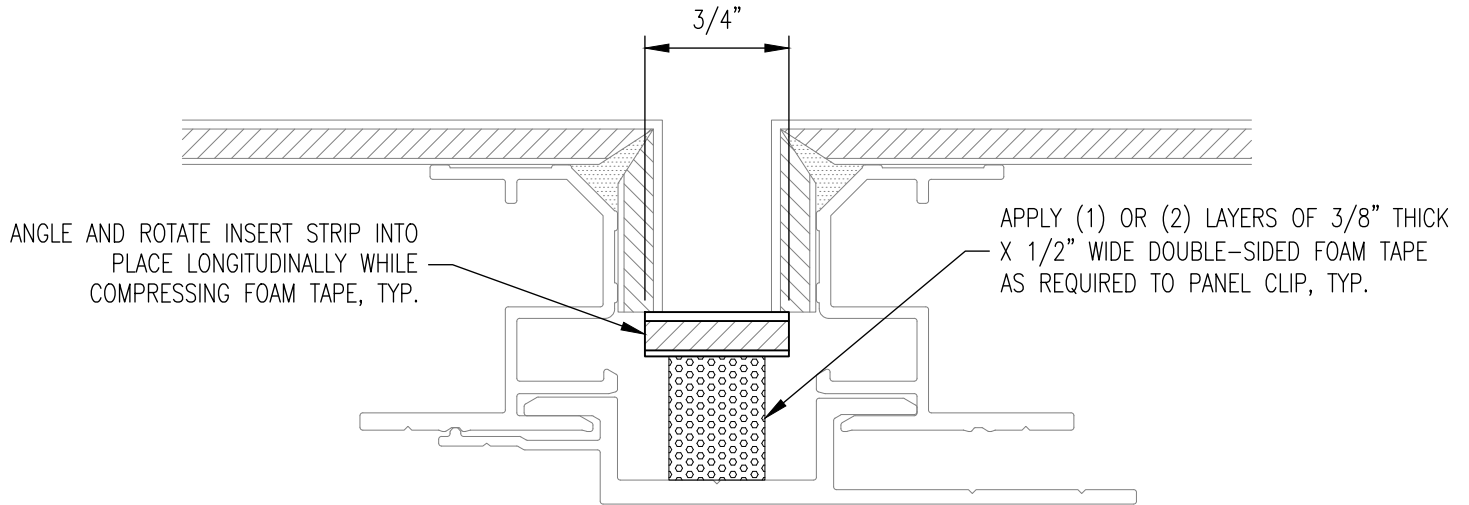

VERTICAL AND HORIZONTAL JOINTS

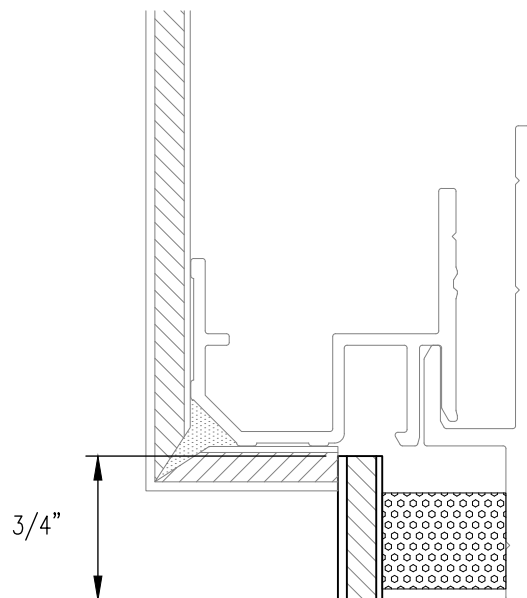

BOTTOM HORIZONTAL AND LEFT VERTICAL EDGES (TYPICAL)

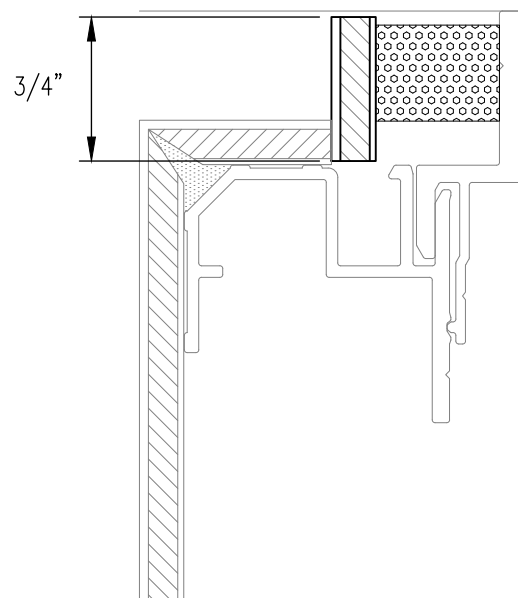

TOP HORIZONTAL AND RIGHT VERTICAL EDGES (TYPICAL)



LAMINATORS
Composite Panel Solutions

www.LaminatorsInc.com

800.523.2347

ALTERNATE PUSH-IN INSERT STRIP - CONFINED AREAS

ADAPTACLAD RS

MISCELLANEOUS DETAILS

Date:
9/1/2026

Drawn By:
JJM

Detail Set:
AC-RS

Dwg. No.:
M-103

Rev:
00