

LAMINATORS, INC.

LETTER OF RESULTS

SCOPE OF WORK

NFPA 285 TESTING ON EXTERIOR NON-LOAD-BEARING WALL ASSEMBLY CONTAINING ONE PIECE, TIGHT-FIT MOLDING INSTALLATION SYSTEM WITH BACK-DRAINED AND VENTILATED SUB-FRAMING OVER OMEGA CI

REFERENCE PROJECT NUMBER

I1284.13-121-24

TEST DATE

04/08/19

LETTER OF RESULTS ISSUE DATE

08/01/19

RECORD RETENTION END DATE

04/08/23

PAGES


4

DOCUMENT CONTROL NUMBER

ATI 00026 (07/24/17)

RT-R-AMER-Test-2766

© 2017 INTERTEK

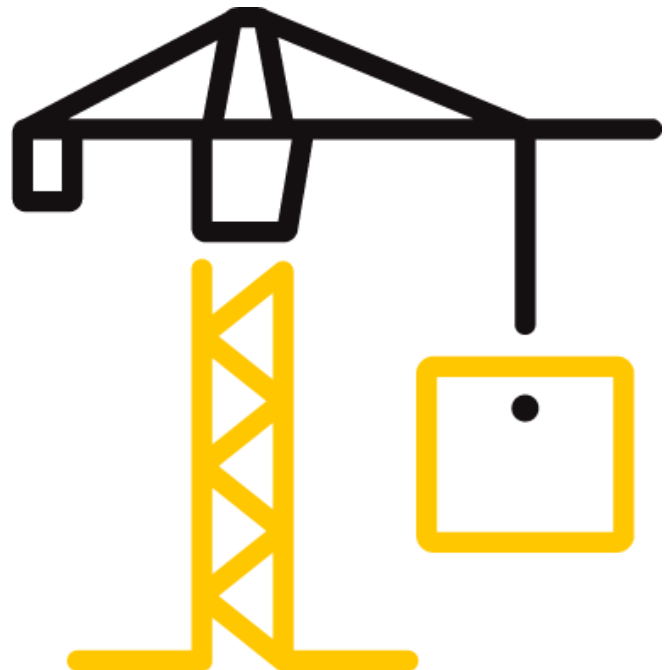

TEST CERTIFICATE FOR LAMINATORS, INC.

Reference Project No.: I1284.13-121-24

Date: 08/01/19

CERTIFICATE ISSUED TO

Laminators, Inc.

3255 Penn Street

Hatfield, Pennsylvania 19440

SECTION 1

SCOPE

Intertek Building & Construction (B&C) was contracted by Laminators, Inc., 3255 Penn Street Hatfield, Pennsylvania 19440 to evaluate the flame propagation characteristics of an exterior, non-load-bearing wall assembly containing one-piece, tight-fit molding (1PTF) installation system with back-drained and ventilated sub-framing over Omega CI. Testing was conducted at the Intertek B&C test facility in York, Pennsylvania. Results obtained are tested values and were secured by using the designated test method(s).. A summary of test results and test assembly is reported herein.

This report does not constitute a complete test report, certification of this product, nor an opinion or endorsement by this laboratory. For full details of the project, reference Intertek-ATI test report number I1284.13-121-24.

SECTION 2

SUMMARY OF TEST RESULTS

Wall System: Exterior Non-load-bearing Wall Assembly

Combustible Components: Carlisle FR Barritech™ VP Fluid-applied vapor-permeable air barrier, 6mm Omega-Lite ACM panel, and Omega CI Rigid Insulation Panel.

NFPA 285 Test Results

The assembly summarized and referenced in this document **did** meet the Conditions of Acceptance of NFPA 285. Construction of the tested assembly is summarized in Section 5 of this document.

For INTERTEK B&C:

COMPLETED BY:	Scott Gingrich	REVIEWED BY:	Ethan Grove
TITLE:	Technician Team Lead – Fire Testing	TITLE:	Manager – Fire Testing
SIGNATURE:		SIGNATURE:	
DATE:	08/01/19	DATE:	08/01/19

SDG:ddr

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample(s) tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST CERTIFICATE FOR LAMINATORS, INC.

Reference Project No.: I1284.13-121-24

Date: 08/01/19

SECTION 3

TEST METHOD

The assembly was evaluated in accordance with the following:

NFPA 285-12, *Standard Fire Test Method for Evaluation of Fire Propagation Characteristics of Exterior Non-Load-Bearing Wall Assemblies Containing Combustible Components*

SECTION 4

TEST PROCEDURE

For complete test procedure, conditions, and calibration values, reference Intertek-ATI Test Report #I1284.13-121-24.

SECTION 5

TEST ASSEMBLY DESCRIPTION

For the complete assembly description and installation procedures, reference Intertek-ATI Test Report number I1284.13-121-24

Interior Cladding

5/8 in. thick National Gypsum Gold Bond® Fire-Shield® gypsum board meeting the requirements of ASTM C1396 was installed over the complete interior surface of the assembly.

Insulation

Rockwool® ComfortBatt® R15 a semi-rigid batt stone wool insulation measuring 15-1/4 in. wide x 47 in. long x 3-1/2 in. thick was friction fit inside each stud cavity of the assembly.

Framing

18 Gauge x 3-5/8 in. wide galvanized steel studs were installed to 18 Gauge x 3-5/8 in. wide galvanized steel track with a spacing of 16 inches on center. Johns Manville MinWool® Safing was installed at each floor line between each stud.

Exterior Sheathing

5/8 in. thick National Gypsum Gold Bond® eXP® exterior gypsum sheathing, meeting the requirements of ASTM C1177, was installed over the complete exterior surface of the framing assembly. The gypsum sheathing was then covered with 2.1 in. thick Omega CI rigid insulation panels. These panels were staggered from the exterior sheathing joints.

This certificate is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this certificate. Only the Client is authorized to permit copying or distribution of this certificate and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this certificate are relevant only to the sample(s) tested. This certificate by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.



TEST CERTIFICATE FOR LAMINATORS, INC.

Reference Project No.: I1284.13-121-24

Date: 08/01/19

SECTION 5 (Continued)

TEST ASSEMBLY DESCRIPTION

Water-resistive Barrier

Carlisle Coatings and Waterproofing Fire Resist Barritech™ VP a fluid-applied membrane was installed at a 60 wet mil (0.060 in.) wet thickness on the Omega CI rigid insulation panels, which yielded a 40 mil (0.040 in.) dry thickness.

Window Opening

A two-part 22-gauge steel flashing was added to the window opening before cladding installation began. Once cladding was installed, 0.028 in. thick aluminum flashing was then installed over the steel flashing of the window opening.

Exterior Cladding Attachment

6005A-T61 alloy/temper aluminum extrusions marked "SH", "AH", and "EJ" were installed at specific locations. Reference Drawings in the test report for usage and locations. 2 in. wide x 3/16 in. thick, 7 lb. density closed-cell PVC foam tape was applied to the face of the sub-framing extrusions. 1/4 in. to 3/8 in. bead of panel adhesive was applied to the face of the sub-framing. These beads were 2 in. x 3 in. Z-formations on 16 in. centers in the field of the panels.

Exterior Cladding

6MM Omega-Lite ACM panels were installed to the sub-framing. Panels above the window opening panels were secured to the assembly using J-moldings, termination J-moldings, and H-moldings and had panel back vents. The assembly was allowed to cure for seven days (minimum recommended) before testing was conducted.

SECTION 6

TEST OBSERVATIONS & RESULTS

For complete test observations and specific acceptance criteria, reference Intertek-ATI Test Report #I1284.13-121-24.

This certificate is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this certificate. Only the Client is authorized to permit copying or distribution of this certificate and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this certificate are relevant only to the sample(s) tested. This certificate by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

